

# Gateway NV42 Series Service Guide

Service guide files and updates are available on the ACER/CSD web; for more information, please refer to <http://csd.acer.com.tw>

PRINTED IN TAIWAN

---

# Revision History

Please refer to the table below for the updates made on this service guide.

| Date | Chapter | Updates |
|------|---------|---------|
|      |         |         |
|      |         |         |
|      |         |         |

---

## Copyright

Copyright © 2009 by Acer Incorporated. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of Acer Incorporated.

## Disclaimer

The information in this guide is subject to change without notice.

Acer Incorporated makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties of merchantability or fitness for any particular purpose. Any Acer Incorporated software described in this manual is sold or licensed "as is". Should the programs prove defective following their purchase, the buyer (and not Acer Incorporated, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software.

Acer is a registered trademark of Acer Corporation.

Intel is a registered trademark of Intel Corporation.

Pentium and Pentium II/III are trademarks of Intel Corporation.

Other brand and product names are trademarks and/or registered trademarks of their respective holders.

---

## Conventions

The following conventions are used in this manual:

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| <b>SCREEN MESSAGES</b> | Denotes actual messages that appear on screen.                                       |
| <b>NOTE</b>            | Gives bits and pieces of additional information related to the current topic.        |
| <b>WARNING</b>         | Alerts you to any damage that might result from doing or not doing specific actions. |
| <b>CAUTION</b>         | Gives precautionary measures to avoid possible hardware or software problems.        |
| <b>IMPORTANT</b>       | Reminds you to do specific actions relevant to the accomplishment of procedures.     |

---

## Preface

Before using this information and the product it supports, please read the following general information.

1. This Service Guide provides you with all technical information relating to the BASIC CONFIGURATION decided for Acer's "global" product offering. To better fit local market requirements and enhance product competitiveness, your regional office MAY have decided to extend the functionality of a machine (e.g. add-on card, modem, or extra memory capability). These LOCALIZED FEATURES will NOT be covered in this generic service guide. In such cases, please contact your regional offices or the responsible personnel/channel to provide you with further technical details.
2. Please note WHEN ORDERING FRU PARTS, that you should check the most up-to-date information available on your regional web or channel. If, for whatever reason, a part number change is made, it will not be noted in the printed Service Guide. For ACER-AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code to those given in the FRU list of this printed Service Guide. You MUST use the list provided by your regional Acer office to order FRU parts for repair and service of customer machines.



|                                              |           |
|----------------------------------------------|-----------|
| <b>System Specifications</b>                 | <b>1</b>  |
| Features                                     | 1         |
| System Block Diagram                         | 4         |
| Gateway Notebook tour                        | 5         |
| Front View                                   | 5         |
| Left View                                    | 6         |
| Right View                                   | 7         |
| Rear View                                    | 7         |
| Bottom View                                  | 8         |
| Keyboard Area (selected models)              | 9         |
| LCD Panel                                    | 10        |
| Status Indicators                            | 11        |
| TouchPad Basics                              | 12        |
| Using the Keyboard                           | 13        |
| Key Types                                    | 13        |
| Windows Keys                                 | 14        |
| System Keys                                  | 15        |
| Hardware Specifications and Configurations   | 16        |
| <b>System Utilities</b>                      | <b>25</b> |
| BIOS Setup Utility                           | 25        |
| Navigating the BIOS Utility                  | 25        |
| Gateway NV42 AMD BIOS                        | 26        |
| Information                                  | 26        |
| Main                                         | 28        |
| Advanced                                     | 29        |
| Security                                     | 30        |
| Boot                                         | 33        |
| Exit                                         | 34        |
| BIOS Flash Utility                           | 35        |
| Using the Flash16 Utility to Update the BIOS | 35        |
| WinFlash Utility                             | 35        |
| Remove HDD/BIOS Password Utilities           | 36        |
| <b>Machine Disassembly and Replacement</b>   | <b>43</b> |
| Disassembly Requirements                     | 43        |
| Related Information                          | 43        |
| General Information                          | 44        |
| Pre-disassembly Instructions                 | 44        |
| Disassembly Process                          | 44        |
| External Module Disassembly Process          | 45        |
| External Modules Disassembly Flowchart       | 45        |
| Removing the Battery Pack                    | 46        |
| Removing the Lower Covers                    | 47        |
| Removing the ODD Module                      | 48        |
| Removing the DIMM Modules                    | 50        |
| Removing the WLAN Module                     | 51        |
| Removing the HDD Module                      | 53        |
| Main Unit Disassembly Process                | 55        |
| Main Unit Disassembly Flowchart              | 55        |
| Removing the Switch Cover                    | 56        |
| Removing the Keyboard                        | 58        |
| Removing the LCD Module                      | 60        |
| Removing the Upper Cover                     | 64        |

# Table of Contents

|                                          |     |
|------------------------------------------|-----|
| Removing the Speaker Modules             | 67  |
| Removing the TouchPad FFC                | 71  |
| Removing the Modem Board                 | 72  |
| Removing the Bluetooth Module            | 74  |
| Removing the USB Board                   | 76  |
| Removing the Mainboard                   | 78  |
| Removing the RTC Battery                 | 80  |
| Removing the Thermal Module              | 81  |
| Removing the CPU                         | 82  |
| LCD Module Disassembly Process           | 83  |
| LCD Module Disassembly Flowchart         | 83  |
| Removing the LCD Bezel                   | 84  |
| Removing the Camera Board                | 86  |
| Removing the LCD Panel                   | 87  |
| Removing the LCD Brackets and FPC Cable  | 89  |
| Removing the Power Board                 | 91  |
| Removing the Microphone Module           | 92  |
| Removing the Antennas                    | 93  |
| LCD Module Reassembly Procedure          | 95  |
| Replacing the Antennas                   | 95  |
| Replacing the Microphone Board           | 96  |
| Replacing the Power Board                | 97  |
| Replacing the LCD Brackets and FPC Cable | 98  |
| Replacing the LCD Panel                  | 100 |
| Replacing the Camera Board               | 101 |
| Replacing the LCD Bezel                  | 102 |
| Main Unit Reassembly Procedure           | 104 |
| Replacing the CPU                        | 104 |
| Replacing the Thermal Module             | 105 |
| Replacing the RTC Battery                | 106 |
| Replacing the Mainboard                  | 107 |
| Replacing the USB Board                  | 108 |
| Replacing the Bluetooth Module           | 110 |
| Replacing the Modem Board                | 111 |
| Replacing the TouchPad FFC               | 112 |
| Replacing the Speaker Modules            | 113 |
| Replacing the Upper Cover                | 116 |
| Replacing the LCD Module                 | 119 |
| Replacing the Keyboard                   | 123 |
| Replacing the Switch Cover               | 124 |
| External Module Reassembly               | 126 |
| Replacing the HDD Module                 | 126 |
| Replacing the WLAN Module                | 128 |
| Replacing the DIMM Module                | 130 |
| Replacing the ODD module                 | 130 |
| Replacing the Lower Covers               | 133 |
| Replacing the Battery                    | 133 |

## Troubleshooting 135

|                              |     |
|------------------------------|-----|
| Common Problems              | 135 |
| Power On Issue               | 136 |
| No Display Issue             | 137 |
| Random Loss of BIOS Settings | 139 |
| LCD Failure                  | 139 |
| Built-In Keyboard Failure    | 140 |

## ***Table of Contents***

|                                                 |            |
|-------------------------------------------------|------------|
| TouchPad Failure .....                          | 140        |
| Internal Speaker Failure .....                  | 141        |
| Internal Microphone Failure .....               | 142        |
| HDD Not Operating Correctly .....               | 143        |
| USB Failure (Rightside) .....                   | 144        |
| Power Button Failure .....                      | 144        |
| External Mouse Failure .....                    | 145        |
| Other Failures .....                            | 145        |
| Intermittent Problems .....                     | 146        |
| Undetermined Problems .....                     | 146        |
| POST Code Reference Tables .....                | 147        |
| Chipset POST Codes .....                        | 147        |
| <b>Jumper and Connector Locations</b>           | <b>151</b> |
| Top View .....                                  | 151        |
| Bottom View .....                               | 152        |
| Clearing Password Check and BIOS Recovery ..... | 153        |
| Clearing Password Check .....                   | 153        |
| BIOS Recovery by Crisis Disk .....              | 154        |
| <b>FRU (Field Replaceable Unit) List</b>        | <b>155</b> |
| Gateway NV42 Exploded Diagrams .....            | 156        |
| Main Assembly .....                             | 156        |
| LCD Assembly .....                              | 157        |
| Gateway NV42 FRU List .....                     | 158        |
| Screw List .....                                | 164        |
| <b>Model Definition and Configuration</b>       | <b>166</b> |
| Gateway NV42 Series .....                       | 166        |
| <b>Test Compatible Components</b>               | <b>169</b> |
| Windows XP Environment Test .....               | 170        |
| <b>Online Support Information</b>               | <b>185</b> |
| <b>Index</b>                                    | <b>187</b> |

# ***Table of Contents***

# System Specifications

---

## Features

Below is a brief summary of the computer's many features:

### Operating System

- Genuine Windows® 7 Home Premium 64 bit
- Genuine Windows® 7 Home Basic 64 bit

### Platform

- AMD Athlon™ 64 X2 dual-core processor TK-42
- AMD Athlon™ 64 single-core processor TF-20
- Chipset: RS780MN, SB710

### System Memory

- Dual-Channel DDR2 SDRAM support
- Up to 2 GB of DDR2 667 MHz memory, upgradeable to 4 GB using two soDIMM modules

### Display

- 14" HD 1366 x 768 pixel resolution, high-brightness (220-nit) Gateway Ultrabright™ TFT LCD, supporting simultaneous multi-window viewing
- 16:9 aspect ratio
- 8 ms response time

### Storage subsystem

- 120/160/250/320/500 GB or larger hard disk drive
- Media card reader, supporting:
  - Secure Digital™ (SD) Card
  - MultiMediaCard (MMC)
  - Reduced-Size Multimedia Card (RS-MMC)
  - Memory Stick® (MS)
  - Memory Stick PRO™ (MS PRO)

### Audio

- Optimized 2nd Generation Dolby® Sound Room®9 audio enhancement, featuring Dolby® Headphone, Dolby® Natural Bass, Dolby® Sound Space Expander
- High-definition audio support
- S/PDIF (Sony/Philips Digital Interface)8 support for digital speakers

- 
- MS-Sound compatible
  - Built-in microphone

## Dimensions and Weight

- 342 x 241 x 39.3 mm
- Weight: ~2.4 kg (including 6-cell Li-Ion cylindrical battery pack)

## Communication

- Gateway Video Conference, featuring:
  - Integrated high-def webcam with 640 x 480 @ 30 fps resolution image capture<sup>1</sup>
- WLAN1, 2: Intel® Wireless WiFi Link 5100/5300 (dual-band quad-mode 802.11a/b/g/Draft-N) Wi-Fi CERTIFIED® wireless LAN card
- WPAN1: Bluetooth® 2.0+EDR (Enhanced Data Rate)
- LAN: Gigabit Ethernet, Wake-on-LAN ready
- Modem: 56K ITU V.92 with PTT approval<sup>10</sup>

## Power subsystem

- ACPI 3.0 CPU power management standard: supports Standby and Hibernation power-saving modes
- 48.8 W 4400 mAh 6-cell Li-ion battery pack:
  - Up to 3-hour battery life
  - 3-pin 65 W AC adapter
- ENERGY STAR® compliant

## Privacy control

- BIOS user, supervisor, HDD passwords
- Kensington lock slot

## Special keys and controls

- 86-/87-/91-key keyboard
- Gateway EZ Pad™ touchpad pointing device
- 9 function keys, four cursor keys, Windows® key, international language support
- Capacitive-touch launch keys: Gateway PowerSave, Gateway MyBackup, touchpad lock, Wi-Fi®, volume up/down/mute

## I/O interface

- Media card reader
- Three USB 2.0 ports
- HDMI™ port with HDCP support
- External display (VGA) port
- Headphone/speaker/line-out jack with S/PDIF support
- Microphone-in jack
- Ethernet (RJ-45) port

- 
- Modem (RJ-11) port
  - DC-in jack for AC adapter

## Environment

- Temperature:
  - Operating: 5 °C to 35 °C (41 °F to 95 °F)
  - Non-operating: -20 °C to 65 °C (-4 °F to 149°F)
- Humidity (non-condensing):
  - Operating: 20% to 80%
  - Non-operating: 20% to 80%

## 4



# Gateway Notebook tour


This section contains information about the external features and functions of the computer.

## Front View



| Icon                                                                              | Item               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Memory card reader | <p>Insert a memory card from a digital camera, MP3 player, PDA, or cellular telephone into the memory card reader.</p> <p>The memory card reader supports Memory Stick®, Memory Stick Pro®, Mini Secure Digital®, MultiMediaCard™, RS-MultiMediaCard™, Secure Digital™, and xD-Picture Card™ cards.</p>                                                                                                                                                                                                                                                                              |
|                                                                                   | Ventilation fan    | <p>Helps cool internal components.</p> <p><b>Warning:</b> Do not work with the notebook resting on your lap. If the air vents are blocked, the notebook may become hot enough to harm your skin.</p> <p><b>Caution:</b> Do not block or insert objects into these slots. If these slots are blocked, your notebook may overheat resulting in unexpected shutdown or permanent damage to the notebook.</p> <p><b>Caution:</b> Provide adequate space around your notebook so air vents are not obstructed. Do not use the notebook on a bed, sofa, rug, or other similar surface.</p> |

# Left View

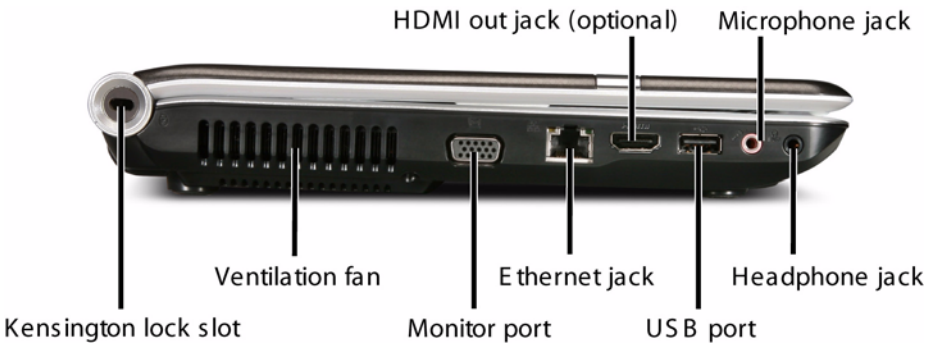


| Icon                                                                                | Item                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Kensington™ lock slot    | Secure your notebook to an object by connecting a Kensington cable lock to this slot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                     | Ventilation fan          | Helps cool internal components.<br><b>Warning:</b> Do not work with the notebook resting on your lap. If the air vents are blocked, the notebook may become hot enough to harm your skin.<br><b>Caution:</b> Do not block or insert objects into these slots. If these slots are blocked, your notebook may overheat resulting in unexpected shutdown or permanent damage to the notebook.<br><b>Caution:</b> Provide adequate space around your notebook so air vents are not obstructed. Do not use the notebook on a bed, sofa, rug, or other similar surface. |
|  | Monitor port             | Plug an analog VGA monitor or projector into this port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  | Ethernet jack            | Plug an Ethernet network cable into this jack. Plug the other end of the cable into a cable modem, DSL modem, or an Ethernet network jack.                                                                                                                                                                                                                                                                                                                                                                                                                        |
|  | USB port                 | Plug USB devices (such as a diskette drive, flash drive, printer, scanner, camera, keyboard, or mouse) into this port.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|  | Microphone jack          | Plug a microphone into this jack.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|  | Headphone jack           | Plug amplified speakers or headphones into this jack. The built-in speakers are turned off when speakers or headphones are plugged into this jacks. <ul style="list-style-type: none"><li>Headphone with SPDIF support</li></ul>                                                                                                                                                                                                                                                                                                                                  |
| HDMI                                                                                | HDMI out jack (optional) | Plug an HDMI device, such as a high definition television, into this optional jack.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

# Right View




| Icon                                                                              | Item            | Description                                                                                                              |
|-----------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------|
|                                                                                   | DVD drive       | Insert CDs or DVDs into this drive.                                                                                      |
|  | USB ports       | Plug USB devices (such as a diskette drive, flash drive, printer, scanner, camera, keyboard, or mouse) into these ports. |
|  | Power indicator | Press to turn the power on or off. You can also configure the power button for Sleep/Resume mode.                        |

# Rear View

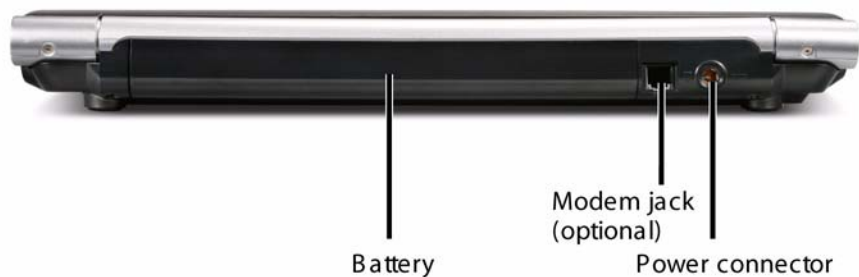


| Icon                                                                                | Item                  | Description                                                    |
|-------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------|
|                                                                                     | Battery               | Provides power when the notebook is not plugged into AC power. |
|  | Modem jack (optional) | Plug a dial-up modem cable into this optional jack.            |
|  | Power connector       | Plug the AC adapter cable into this connector.                 |

# Bottom View

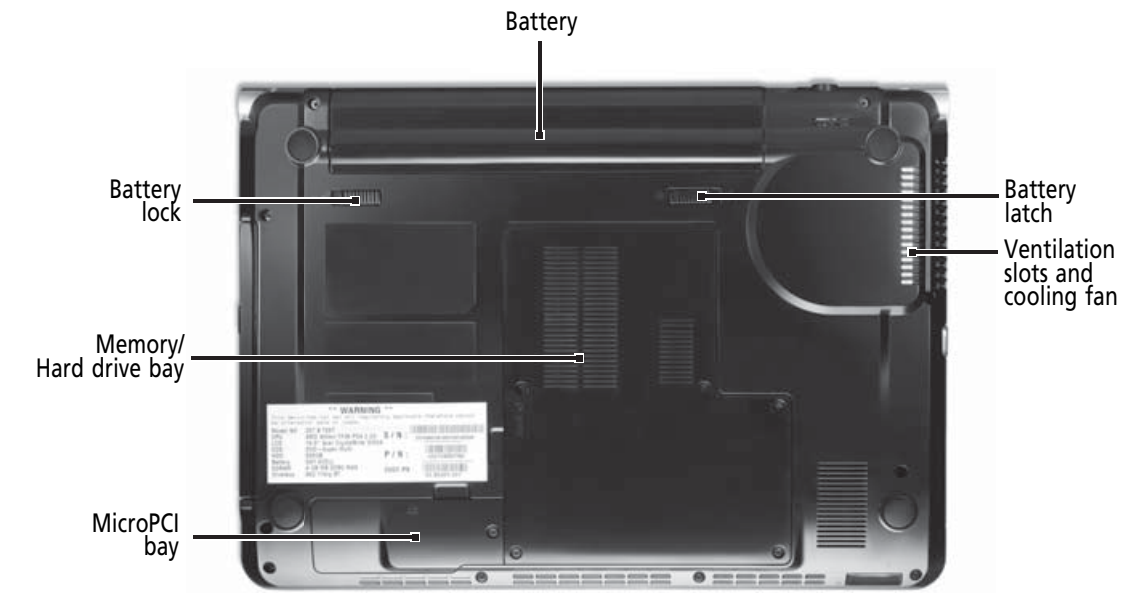

| Icon                                                                                | Item                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | Battery                           | Provides power when the notebook is not plugged into AC power.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|    | Battery lock                      | Slide to unlock the battery.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|  | Battery latch                     | Slide to release the battery.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|  | MicroPCI bay                      | MicroPCI modules are located in this bay.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|  | Memory bay                        | Memory modules are located in this bay.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|  | Hard drive bay                    | The hard drive is located in this bay.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                                                     | Ventilation slots and cooling fan | <p>Helps cool internal components.</p> <p><b>Warning:</b> Do not work with the notebook resting on your lap. If the air vents are blocked, the notebook may become hot enough to harm your skin.</p> <p><b>Caution:</b> Do not block or insert objects into these slots. If these slots are blocked, your notebook may overheat resulting in unexpected shutdown or permanent damage to the notebook.</p> <p><b>Caution:</b> Provide adequate space around your notebook so air vents are not obstructed. Do not use the notebook on a bed, sofa, rug, or other similar surface.</p> |

# Keyboard Area (selected models)

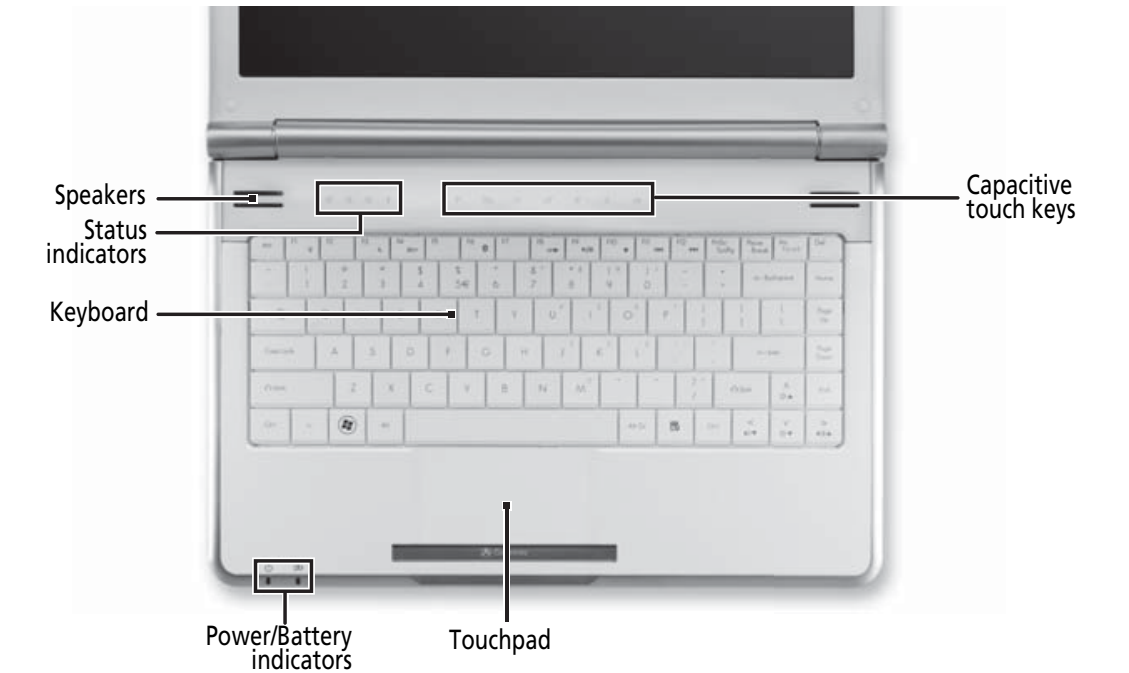

| Icon                                                                                | Item                     | Description                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | Speakers                 | Left and right speaker deliver stereo output.                                                                                                                                                                                                                                                                                                                                |
|                                                                                     | Status indicators        | Inform you when a drive is in use or when a button has been pressed that affects how the keyboard is used. See “Status Indicators” on page 11.                                                                                                                                                                                                                               |
|                                                                                     | Keyboard                 | Provides all the features of a full-sized, computer keyboard.                                                                                                                                                                                                                                                                                                                |
|  | Power indicator          | <ul style="list-style-type: none"><li>LED on - Notebook is on.</li><li>LED blinking - Notebook is in Sleep or Hybrid Sleep mode.</li><li>LED off - Notebook is off.</li></ul>                                                                                                                                                                                                |
|  | Battery charge indicator | <ul style="list-style-type: none"><li>LED orange - Battery is fully charged.</li><li>LED blinking orange - Battery is charging.</li><li>LED blinking red - Battery charge is very low.</li><li>LED solid red - Battery is malfunctioning.</li></ul> <b>Important:</b> This LED only lights up when your notebook is connected to AC power or the battery charge is very low. |
|                                                                                     | TouchPad                 | Provides all the functionality of a mouse.                                                                                                                                                                                                                                                                                                                                   |
|                                                                                     | Capacitive touch keys    | Press to access capacitive touch key function.                                                                                                                                                                                                                                                                                                                               |

---


# LCD Panel



| Icon                                                                              | Item       | Description                                                                   |
|-----------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------|
|                                                                                   | Webcam     | Use to let others see who they are communicating with when making VoIP calls. |
|  | Microphone | Use to talk through when making Voice over Internet Protocol (VoIP) calls.    |

# Status Indicators


The computer has several easy-to-read status indicators. The front panel indicators are visible even when the computer cover is closed.

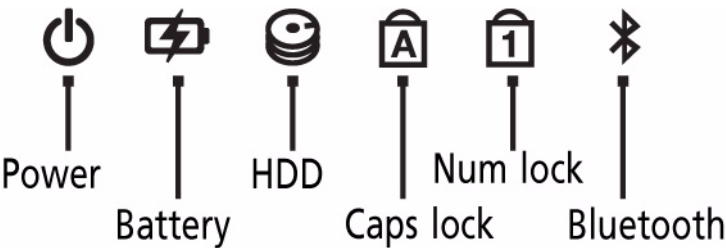

| Icon                                                                                | Item                     | Description                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Power indicator          | <ul style="list-style-type: none"><li>• LED on - Notebook is on.</li><li>• LED blinking - Notebook is in Sleep or Hybrid Sleep mode.</li><li>• LED off - Notebook is off.</li></ul>                                           |
|    | Battery charge indicator | <ul style="list-style-type: none"><li>• LED blue - Battery is fully charged.</li><li>• LED red - Battery is charging.</li></ul> <p><b>Important:</b> This LED only lights up when your notebook is connected to AC power.</p> |
|    | Hard drive               | <ul style="list-style-type: none"><li>• LED blinking - The drive is being accessed.</li><li>• LED off - The drive is not being accessed.</li></ul>                                                                            |
|    | Caps lock                | <ul style="list-style-type: none"><li>• LED on - Caps lock is turned on.</li><li>• LED off - Caps lock is turned off.</li></ul>                                                                                               |
|   | Num lock                 | <ul style="list-style-type: none"><li>• LED on - Num lock is turned on.</li><li>• LED off - Num lock is turned off.</li></ul>                                                                                                 |
|  | Bluetooth                | <ul style="list-style-type: none"><li>• LED on - Bluetooth communication is turned on.</li><li>• LED off - Bluetooth communication is turned off.</li></ul>                                                                   |

# TouchPad Basics

The following items show you how to use the TouchPad:

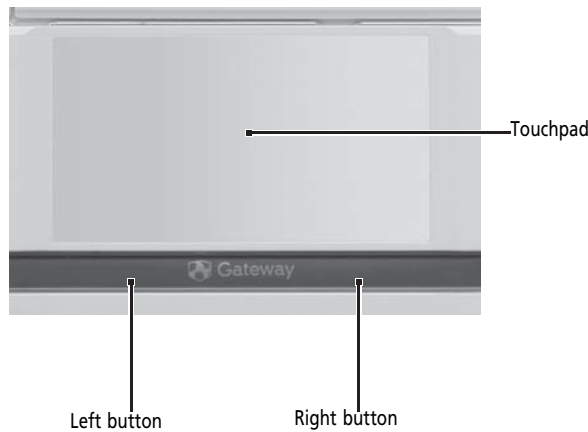


- Move your finger across the TouchPad to move the cursor.
- Press the left and right buttons located beneath the TouchPad to perform selection and execution functions. These two buttons are similar to the left and right buttons on a mouse. Tapping on the TouchPad is the same as clicking the left button.

| Function            | Left Button                                                         | Right Button | Main TouchPad                                                                                                                            |
|---------------------|---------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Execute             | Quickly click twice.                                                |              | Tap twice (at the same speed as double-clicking a mouse button).                                                                         |
| Select              | Click once.                                                         |              | Tap once.                                                                                                                                |
| Drag                | Click and hold, then use finger on the TouchPad to drag the cursor. |              | Tap twice (at the same speed as double-clicking a mouse button); rest your finger on the TouchPad on the second tap and drag the cursor. |
| Access context menu |                                                                     | Click once.  |                                                                                                                                          |

**NOTE:** When using the TouchPad, keep it - and your fingers - dry and clean. The TouchPad is sensitive to finger movement; hence, the lighter the touch, the better the response. Tapping too hard will not increase the TouchPad's responsiveness.

# Using the Keyboard

Your Gateway NV42 has a close-to-full-sized keyboard and an embedded numeric keypad, separate cursor, lock, function and special keys.

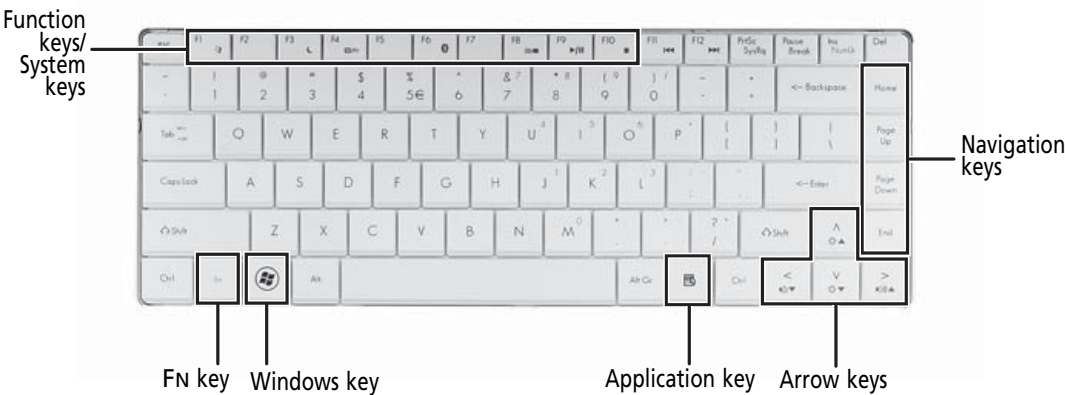

## Key Types

The keyboard has several different types of keys. Some keys perform specific actions when pressed alone and other actions when pressed in combination with another key.

| Icon                                                                                | Key Type        | Description                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | Function keys   | Press these keys labeled F1 to F12 to perform actions in programs. For example, pressing F1 may open help. Each program uses different function keys for different purposes. See the program documentation to find out more about the function key actions. |
|                                                                                     | System keys     | Press these colored keys in combination with the Fn key to perform specific actions. See “System Keys” on page 15.                                                                                                                                          |
|                                                                                     | Navigation keys | Press these keys to move the cursor to the beginning of a line, to the end of a line, up the page, down the page, to the beginning of a document, or to the end of a document.                                                                              |
|                                                                                     | Fn key          | Press the Fn key in combination with a colored system key to perform a specific action.                                                                                                                                                                     |
|  | Windows key     | Press this key to open the Windows Start menu. This key can also be used in combination with other keys to open utilities. See “Windows Keys” on page 14.                                                                                                   |
|  | Application key | Press this key for quick access to shortcut menus and help assistants in Windows.                                                                                                                                                                           |
|                                                                                     | Arrow keys      | Press these keys to move the cursor up, down, right, or left.                                                                                                                                                                                               |

# Windows Keys

The keyboard has two keys that perform Windows-specific functions.

| Key                                                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Windows key | <p>Pressed alone, this key has the same effect as clicking on the Windows Start button; it launches the Start menu. It can also be used with other keys to provide a variety of functions:</p> <p>&lt;  &gt;: Open or close the Start menu</p> <p>&lt;  &gt; + &lt;D&gt;: Display the desktop</p> <p>&lt;  &gt; + &lt;E&gt;: Open Windows Explore</p> <p>&lt;  &gt; + &lt;F&gt;: Search for a file or folder</p> <p>&lt;  &gt; + &lt;G&gt;: Cycle through Sidebar gadgets</p> <p>&lt;  &gt; + &lt;L&gt;: Lock your computer (if you are connected to a network domain), or switch users (if you're not connected to a network domain)</p> <p>&lt;  &gt; + &lt;M&gt;: Minimizes all windows</p> <p>&lt;  &gt; + &lt;R&gt;: Open the Run dialog box</p> <p>&lt;  &gt; + &lt;T&gt;: Cycle through programs on the taskbar</p> <p>&lt;  &gt; + &lt;U&gt;: Open Ease of Access Center</p> <p>&lt;  &gt; + &lt;X&gt;: Open Windows Mobility Center</p> <p>&lt;  &gt; + &lt;BREAK&gt;: Display the System Properties dialog box</p> <p>&lt;  &gt; + &lt;SHIFT+M&gt;: Restore minimized windows to the desktop</p> <p>&lt;  &gt; + &lt;TAB&gt;: Cycle through programs on the taskbar by using Windows Flip 3-D</p> <p>&lt;  &gt; + &lt;SPACEBAR&gt;: Bring all gadgets to the front and select Windows Sidebar</p> <p>&lt;CTRL&gt; + &lt;  &gt; + &lt;F&gt;: Search for computers (if you are on a network)</p> <p>&lt;CTRL&gt; + &lt;  &gt; + &lt;TAB&gt;: Use the arrow keys to cycle through programs on the taskbar by using Windows Flip 3-D</p> <p><b>Note:</b> Depending on your edition of Windows Vista, some shortcuts may not function as described.</p> |

## System Keys

The computer employs hotkeys or key combinations to access most of the computer's controls like screen brightness, Bluetooth and WiFi.

To activate hot keys, press and hold the <Fn> key before pressing the other key in the hotkey combination.

| Hotkey   | Icon                                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fn + F1  |    | Turn the capacitive touch key LEDs on or off. For more information, see "Using the status indicators" on page 24.                                                                                                                                                                                                                                                                                                                                                       |
| Fn + F3  |    | Enter Sleep mode or Hybrid Sleep mode. Press the power button to leave Sleep mode.                                                                                                                                                                                                                                                                                                                                                                                      |
| Fn + F4  |    | Toggle the notebook display in the following order: <ul style="list-style-type: none"><li>• The LCD</li><li>• An external monitor or projector (a monitor or projector must be plugged into the monitor port or HDMI port on your notebook)</li><li>• Both displays at the same time</li></ul>                                                                                                                                                                          |
| Fn + F6  |    | Turn the optional Bluetooth radio on or off.<br><b>Warning:</b> Radio frequency wireless communication can interfere with equipment on commercial aircraft.<br>Current aviation regulations require wireless devices to be turned off while traveling in an airplane. Bluetooth communication devices are examples of devices that provide wireless communication.<br><b>Important:</b> The wireless network switch must be in the ON position for this button to work. |
| Fn + F7  |  | Mute the sound. Press the key combination again to restore the sound.                                                                                                                                                                                                                                                                                                                                                                                                   |
| Fn + F8  |  | Turns the display screen backlight off to save power. Press any key to return.                                                                                                                                                                                                                                                                                                                                                                                          |
| Fn + F9  |  | Play/ Pause—Plays or pauses the CD or DVD.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Fn + F10 |  | Stop—Stops playing the CD or DVD.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Fn + F11 |  | Previous—Skips back one CD track or DVD chapter.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Fn + 12  |  | Next—Skips ahead one CD track or DVD chapter.                                                                                                                                                                                                                                                                                                                                                                                                                           |

# Hardware Specifications and Configurations

## Processor

| Item        | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU type    | AMD Turion/Sempron                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CPU package | Micro-PGA packaging, 638-pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Core Logic  | <ul style="list-style-type: none"> <li>AMD Turion/Sempron CPUs</li> <li>RS780MN</li> <li>SB710</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Chipset     | <ul style="list-style-type: none"> <li>WPCE775 integrated power controller and keyboard controller</li> <li>Integrated RS780MN VGA chip.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Features    | <ul style="list-style-type: none"> <li>Supports the mobile and desktop Athlon 64/Athlon 64FX/ Athlon X2/Sempron/Turion 64 processors, including S1 socket CPUs.</li> <li>Support for DDR2 system memories up to DDR2-667, with a maximum memory clock speed of 667MHz.</li> <li>Integrated VGA.</li> <li>One x4 A-Link Express II interface (PCI Express 1.1 compliant) for connection to an AMD Southbridge.</li> <li>Support PCI bus at 33MHz.</li> <li>Supports four SATA ports, complying with the SATA 1.0a specification</li> <li>5 OHCI and 1 EHCI Host controllers to support 12 USB ports</li> </ul> |

## Processor Specifications

| Item          | CPU Speed | Cores | Bus Speed (MHz) | Mfg. Tech | Cache Size | Package | Acer P/N     |
|---------------|-----------|-------|-----------------|-----------|------------|---------|--------------|
| Athlon TF20   | 1.6 GHz   | 1     |                 | 65 nm     | 512 kB     | S1      | KC.ATF02.200 |
| Athlon TF36   | 2.0 GHz   | 1     |                 |           | 256 kB     | S1      | KC.ATF02.360 |
| Athlon TF38   | 2.2 GHz   | 1     |                 |           | 256 kB     | S1      | KC.ATF02.380 |
| AthlonX2 TK42 | 1.6 GHz   | 2     |                 | 65 nm     | 1 MB       | S1      | KC.ATK02.420 |

## CPU Fan Tru Value Table

| CPU Temperature at Diode (°C) |    | Fan Speed (RPM) | SPL Spec (dBA) |
|-------------------------------|----|-----------------|----------------|
| 33                            | 38 | 2700            | 28             |
| 40                            | 45 | 3000            | 31             |
| 52                            | 47 | 3300            | 34             |
| 60                            | 67 | 3800            | 37             |
| 72                            | 75 | 4000            | 40             |
| 92                            | 89 | 4800            |                |

- Throttling 50%: On= 84°C; OFF=86°C
- OS shut down at 100°C; H/W shut down(PH1) at 110°C

---

**Graphics**

| Item                             | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display support                  | Dual independent display support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Colors                           | 16.7 million colors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| External resolution/refresh rate | <ul style="list-style-type: none"><li>• 2048 x 1536: 75/60 Hz</li><li>• 1920 x 1440: 85/75/60 Hz</li><li>• 1920 x 1200: 75/60 Hz</li><li>• 1920 x 1080: 100/85/75/60 Hz</li><li>• 1680 x 945: 100/85/75/60 Hz</li><li>• 1600 x 1200: 120/100/85/75/60 Hz</li><li>• 1600 x 900: 120/100/85/75/60 Hz</li><li>• 1400 x 1050: 85/75/60 Hz</li><li>• 1366 x 768: 85/75/60 Hz</li><li>• 1280 x 1024: 120/100/85/75/60 Hz</li><li>• 1280 x 960: 85/75/60 Hz</li><li>• 1280 x 768: 85/75/60 Hz</li><li>• 1280 x 720: 100/85/75/60 Hz</li><li>• 1024 x 768: 120/100/85/75/60 Hz</li><li>• 800 x 600: 120/100/85/72/60 Hz</li></ul> |

## System Memory

| Item                            | Specification                                   |
|---------------------------------|-------------------------------------------------|
| Memory controller               | Built in                                        |
| Memory size                     | N/A                                             |
| DIMM socket number              | 2                                               |
| Supports memory size per socket | 2 GB                                            |
| Supports maximum memory size    | 4 GB                                            |
| Supports DIMM type              | DDR II 800/677Mhz SDRAM memory interface design |
| Supports DIMM Speed             | 800/677Mhz SDRAM                                |

## System Storage

| Item | Specification                                                                                                                                                                                                |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HDD  | <ul style="list-style-type: none"><li>9.5mm height, 2.5" HDD</li><li>Easily removable with no more than four screws</li><li>SATA bus</li><li>160-500GB</li><li>5400 rpm</li><li>SATA connector BTO</li></ul> |

## Hard Disk Drive Interface

| Item                                      | Hard Disk Specification |                     |                     |                     |                          |                          |
|-------------------------------------------|-------------------------|---------------------|---------------------|---------------------|--------------------------|--------------------------|
| Vendor & Model Name                       | Seagate ST9160310AS     | Seagate ST9250315AS | Seagate ST9320320AS | Seagate ST9500325AS | Hitachi HTS54 3216L9A300 | Hitachi HTS545025B9 A300 |
| Capacity (GB)                             | 160                     | 250                 | 320                 | 500                 | 160                      | 250                      |
| Bytes per sector                          | 512                     | 512                 | 512                 | 512                 | 512                      | 512                      |
| Data heads                                | 2                       | 2                   | 4                   | 4                   | 2                        | 2                        |
| Drive Format                              |                         |                     |                     |                     |                          |                          |
| Disks                                     | 1                       | 1                   | 2                   | 2 1                 |                          | 1                        |
| Spindle speed (RPM)                       | 5400                    | 5400                | 5400                | 5400                | 5400                     | 5400                     |
| Performance Specifications                |                         |                     |                     |                     |                          |                          |
| Buffer size                               | 8 MB                    | 8 MB                | 8MB                 | 8 MB                | 8 MB                     | 8MB                      |
| Interface                                 | SATA                    | SATA                | SATA                | SATA                | SATA                     | SATA                     |
| Fast data transfer rate (Mbits/sec, max)  | 830                     | 1175                | 830                 | 1175                | 845                      | 875                      |
| Media data transfer rate (Mbytes/sec max) | 300                     | 300                 | 300                 | 300                 | 300                      | 300                      |
| DC Power Requirements                     |                         |                     |                     |                     |                          |                          |
| Voltage tolerance                         | 5V ±5%                  | 5V ±5%              | 5V ±5%              | 5V ±5%              | 5V ±5%                   | 5V ±5%                   |

| Item                | Hard Disk Specification  |                          |                   |                   |                   |                   |
|---------------------|--------------------------|--------------------------|-------------------|-------------------|-------------------|-------------------|
| Vendor & Model Name | Hitachi HTS545032B9 A300 | Hitachi HTS545050B9 A300 | Toshiba MK1655GSX | Toshiba MK2555GSX | Toshiba MK3255GSX | Toshiba MK5055GSX |
| Capacity (GB)       | 320                      | 500                      | 160               | 250               | 320               | 500               |
| Bytes per sector    | 512                      | 512                      | 512               | 512               | 512               | 512               |

| Item                                      | Hard Disk Specification |        |                   |                   |                   |                   |
|-------------------------------------------|-------------------------|--------|-------------------|-------------------|-------------------|-------------------|
| Data heads                                | 2                       | 4      | 2                 | 2                 | 4                 | 4                 |
| Drive Format                              |                         |        |                   |                   |                   |                   |
| Disks                                     | 1                       | 2      | 1                 | 1                 | 2                 | 2                 |
| Spindle speed (RPM)                       | 5400                    | 5400   | 5400              | 5400              | 5400              | 5400              |
| Performance Specifications                |                         |        |                   |                   |                   |                   |
| Buffer size                               | 8 MB                    | 8 MB   | 8MB               | 8 MB              | 8 MB              | 8MB               |
| Interface                                 | SATA                    | SATA   | SATA              | SATA              | SATA              | SATA              |
| Fast data transfer rate (Mbits/sec, max)  | 875                     | 875    | 363 ~ 952 typical | 363 ~ 952 typical | 363 ~ 952 typical | 363 ~ 952 typical |
| Media data transfer rate (Mbytes/sec max) | 300                     | 300    | 300               | 300               | 300               | 300               |
| DC Power Requirements                     |                         |        |                   |                   |                   |                   |
| Voltage tolerance                         | 5V ±5%                  | 5V ±5% | 5V ±5%            | 5V ±5%            | 5V ±5%            | 5V ±5%            |

| Item                                      | Hard Disk Specification           |                                   |                                   |                                   |
|-------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Vendor & Model Name                       | Western Digital WD1600BEVT-22ZCT0 | Western Digital WD2500BEVT-22ZCT0 | Western Digital WD3200BEVT-22ZCT0 | Western Digital WD5000BEVT-22ZAT0 |
| Capacity (GB)                             | 160                               | 250                               | 320                               | 500                               |
| Bytes per sector                          | 512                               | 512                               | 512                               | 512                               |
| Data heads                                | 2                                 | 4                                 | 3                                 | 4                                 |
| Drive Format                              |                                   |                                   |                                   |                                   |
| Disks                                     | 1                                 | 2                                 | 2                                 | 2                                 |
| Spindle speed (RPM)                       | 5400                              | 5400                              | 5400                              | 5400                              |
| Performance Specifications                |                                   |                                   |                                   |                                   |
| Buffer size                               | 8 MB                              | 8 MB                              | 8MB                               | 8 MB                              |
| Interface                                 | SATA                              | SATA                              | SATA                              | SATA                              |
| Fast data transfer rate (Mbits/sec, max)  | N/A                               | N/A                               | N/A                               | N/A                               |
| Media data transfer rate (Mbytes/sec max) | 300                               | 300                               | 300                               | 300                               |
| DC Power Requirements                     |                                   |                                   |                                   |                                   |
| Voltage tolerance                         | 5V ±5%                            | 5V ±5%                            | 5V ±5%                            | 5V ±5%                            |

### Optical Disk Drive

| Item                      | Specification                                                                                                                                                                                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                      | 8X DVD-Super Multi double-layer drive                                                                                                                                                                                                                                                                                                       |
| Performance Specification |                                                                                                                                                                                                                                                                                                                                             |
| Transfer rate (MB/sec)    | 10.8                                                                                                                                                                                                                                                                                                                                        |
| Buffer Memory             | 2MB                                                                                                                                                                                                                                                                                                                                         |
| Read/write speeds         | ·Read: 24X CD-ROM, 24X CD-R, 24X CD-RW, 8X DVD-ROM, 8X DVD-R, 8X DVD+R, 6X DVD-ROM DL (double-layer), 6X DVD-R DL (double-layer), 6X DVD+R DL (double-layer), 6X DVD-RW, 6X DVD+RW, 5X DVD-RAM<br>·Write: 24X CD-R, 16X CD-RW, 8X DVD-R, 8X DVD+R, 4X DVD-R DL (double-layer), 4X DVD+R DL (double-layer), 6X DVD-RW, 8X DVD+RW, 5X DVD-RAM |
| Interface                 | SATA                                                                                                                                                                                                                                                                                                                                        |
| Loading mechanism         | Drawer-Type                                                                                                                                                                                                                                                                                                                                 |
| Power Requirement         |                                                                                                                                                                                                                                                                                                                                             |
| Input Voltage             | DC 5 V +/- 5%                                                                                                                                                                                                                                                                                                                               |

### BIOS

| Item          | Specification |
|---------------|---------------|
| BIOS vendor   | Phoenix       |
| BIOS Version  | 2301          |
| BIOS ROM type | Flash         |
| BIOS ROM size | 16 MB         |

**LCD 10.1"**

| Item                                                                                            | Specification                      |                                    |                                    |                            |
|-------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|----------------------------|
| Vendor/model name                                                                               | AU Optronics                       | Chi Mei                            | Samsung                            | LG                         |
| Screen Diagonal (mm)                                                                            | 354.95                             | 354.95                             | 354.95                             | 354.95                     |
| Active Area (mm)                                                                                | 309.40 X<br>173.95                 | 309.40 X<br>173.95                 | 309.40 X<br>173.95                 | 309.40 X<br>173.95         |
| Display resolution (pixels)                                                                     | 1366x768                           | 1366x768                           | 1366x768                           | 1366x768                   |
| Pixel Pitch (mm)                                                                                | 0.2265X0.2265                      | 0.2265X0.2265                      | 0.2265X0.2265                      | 0.2265X0.2265              |
| Typical White Luminance (cd/m <sup>2</sup> )<br>also called Brightness                          | 200                                | 220                                | 220                                | 220                        |
| Contrast Ratio                                                                                  | 500                                | 650                                | 500                                | 500                        |
| Response Time (Optical Rise<br>Time/Fall Time) msec                                             | 8                                  | 8                                  | 8                                  | 8                          |
| Typical Power Consumption<br>(watt)                                                             | 4.8                                | 4.8                                | 3.2                                | 4.5                        |
| Weight (without inverter)                                                                       | 350                                | 355                                | 360                                | 350                        |
| Physical Size (mm)                                                                              | 324x192.5x5.2                      | 324x192.5x5.2                      | 324x192.5x5.2                      | 324x192.5x5.2              |
| Electrical Interface                                                                            | 1 ch. LVDS                         | 1 ch. LVDS                         | LVDS                               | LVDS                       |
| Viewing Angle (degree)<br>Horizontal (Right)/CR = 10 (Left)<br>Vertical (Upper)/CR = 10 (Lower) | 45/45 (typical)<br>15/35 (typical) | 45/45 (typical)<br>20/45 (typical) | 45/45 (typical)<br>15/35 (typical) | 40/40 (min)<br>10/30 (min) |

**Audio Interface**

| Item                          | Specifications                                                                                                                                                                                                                                                                                                                              |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Controller              | <ul style="list-style-type: none"> <li>Conexant CX-20561-15Z Azalia Codec</li> <li>Amplifier GMT G1441</li> </ul>                                                                                                                                                                                                                           |
| Audio onboard or option       | Built-in                                                                                                                                                                                                                                                                                                                                    |
| Mono or Stereo                | Stereo                                                                                                                                                                                                                                                                                                                                      |
| Resolution                    | 2.1                                                                                                                                                                                                                                                                                                                                         |
| Compatibility                 | Headphone-out with S/PDIF, Line-In and Microphone-In.2 stereo ADCs support 16/20/24-bit PCM format recording simultaneously.                                                                                                                                                                                                                |
| Sampling Rate.                | All DACs supports 16/20/24-bit, 44.1k/48k/96k/192kHz sample rate.All ADCs supports 16/20/24-bit, 44.1k/48k/96k/192kHz sample rate.Two independent S/PDIF-OUT converters support 16/20/24-bit, 44.1k/48k/88.2k/96k/192kHz sample rate. One for normal S/PDIF output, the other one output an independent digital stream to HDMI transmitter. |
| Internal Microphone           | <ul style="list-style-type: none"> <li>Digital MICRO PHONE ZK2(HFM-M101-006-L19-G)</li> <li>Digital MICRO PHONE ZK2(A-OA2408FM-018)</li> </ul>                                                                                                                                                                                              |
| Internal speaker/<br>Quantity | Two Med-High Speakers (2W/4Ohm) and one Subwoofer (3W/4Ohm)                                                                                                                                                                                                                                                                                 |

## LAN Interface

| Item        | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN Chipset | Broadcom BCM5784M 10/100/1000 Mbps Gigabit Ethernet LAN Controller with Integrated Transceiver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Features    | <ul style="list-style-type: none"><li>• Integrated 10/100/1000BASE-T transceiver</li><li>• Automatic MDI crossover function</li><li>• PCIe v1.1 compliant</li><li>• 10/100/1000BASE-T full-duplex/half-duplex MAC</li><li>• Receive side scaling (RSS) for multicore processors</li><li>• Complies with IEEE 802.3, 802.3u, 802.3ab, and 802.1p</li><li>• Supports iSCSI boot</li><li>• FLASH Auto-Sense mode</li><li>• IPv4 and IPv6 large send offload and checksum offload (LSO/TCO)</li><li>• Wake on LAN (WOL) support meeting the ACPI requirements</li><li>• Statistics for SNMP MIB II, Ethernet-like MIB, and Ethernet MIB (IEEE 802.3z, Clause 30)</li><li>• SMBus interface supporting Alert Standard Format (ASF) v2.0</li><li>• Self-boot feature, utilizing smaller EEPROM size</li><li>• Serial flash memory support</li><li>• PCI Express CLKREQ support</li><li>• Energy Detect/Cable Sense</li><li>• Super Low Power Mode, for ultra-low power consumption</li><li>• 68-pin QFN package</li></ul> |

## Keyboard

| Item                                             | Specification                                   |
|--------------------------------------------------|-------------------------------------------------|
| Type                                             | flat keyboard                                   |
| Total number of keypads                          | 84                                              |
| Windows logo key                                 | Yes                                             |
| Internal & external keyboard work simultaneously | Plug USB keyboard to the USB port directly: Yes |

## Mini Card

| Item             | Specification                                                                                                      |
|------------------|--------------------------------------------------------------------------------------------------------------------|
| Number Supported | 1                                                                                                                  |
| Features         | <ul style="list-style-type: none"><li>• 1 mini card slot for WLAN (half-size)</li><li>• 52 pin connector</li></ul> |

## Bluetooth interface

| Item    | Specification                                                                                        |
|---------|------------------------------------------------------------------------------------------------------|
| Chipset | <ul style="list-style-type: none"><li>• Foxconn Bluetooth FOX_ T60H928.11 Bluetooth module</li></ul> |

| Item           | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Features       | <ul style="list-style-type: none"> <li>• Embedded USB solution with antenna</li> <li>• Bluetooth 2.0+EDR</li> <li>• Bluetooth control for BT optical mouse</li> </ul>                                                                                                                                                                                                                                                                          |
| Specifications | <ul style="list-style-type: none"> <li>• Radio Technology FHSS</li> <li>• Operating Frequency: 2402 ~ 2480MHz ISM band</li> <li>• Channel Numbers: 79 channels with 1MHz BW</li> <li>• Transmitter Output Power: -4~4dBm output power for class2 operation</li> <li>• Receiver Sensitivity:-78dBm @ 0.1% BER (Max)</li> <li>• Maximum Receiver Signal: -10dBm</li> <li>• Operating Voltage: 3.3V+/-0.3V</li> <li>• Interface:USB2.0</li> </ul> |

#### Wireless LAN

| Item     | Specification                                                                                                       |
|----------|---------------------------------------------------------------------------------------------------------------------|
| Type     | IEEE802.11 b/g Half PCI-e Card                                                                                      |
| Features | <ul style="list-style-type: none"> <li>• IEEE 802.11 b/g</li> <li>• PCI-Express Half Mini card (H2 type)</li> </ul> |

#### Battery

| Item                   | Specification                   |
|------------------------|---------------------------------|
| Vendor & model name    | SIMPLO AS-2009C, SANYO AS-2009C |
| Battery Type           | Li-ion                          |
| Pack capacity          | 4400mAh                         |
| Number of battery cell | 6                               |
| Package configuration  | 3S2P                            |



# System Utilities

---

## BIOS Setup Utility

The BIOS Setup Utility is a hardware configuration program built into your computer's BIOS (Basic Input/Output System).

Your computer is already properly configured and optimized, and you do not need to run this utility. However, if you encounter configuration problems, you may need to run Setup. Please also refer to Chapter 4 Troubleshooting when problem arises.

To activate the BIOS Utility, press **F2** during POST (when "Press <F2> to enter Setup" message is prompted on the bottom of screen).

Press **F2** to enter setup. The default parameter of F12 Boot Menu is set to "disabled". If you want to change boot device without entering BIOS Setup Utility, please set the parameter to "enabled".

Press <F12> during POST to enter multi-boot menu. In this menu, user can change boot device without entering BIOS SETUP Utility.

## Navigating the BIOS Utility

There are six menu options: Information, Main, Advanced, Security, Boot, and Exit.

Follow these instructions:


- To choose a menu, use the left and right arrow keys.
- To choose an item, use the up and down arrow keys.
- To change the value of a parameter, press **F5** or **F6**.
- A plus sign (+) indicates the item has sub-items. Press **Enter** to expand this item.
- Press **Esc** while you are in any of the menu options to go to the Exit menu.
- In any menu, you can load default settings by pressing **F9**. You can also press **F10** to save any changes made and exit the BIOS Setup Utility.

**NOTE:** You can change the value of a parameter if it is enclosed in square brackets. Navigation keys for a particular menu are shown on the bottom of the screen. Help for parameters are found in the Item Specific Help part of the screen. Read this carefully when making changes to parameter values. **Please note that system information is subject to different models.**

# Gateway NV42 AMD BIOS

## Information

The Information screen displays a summary of your computer hardware information.

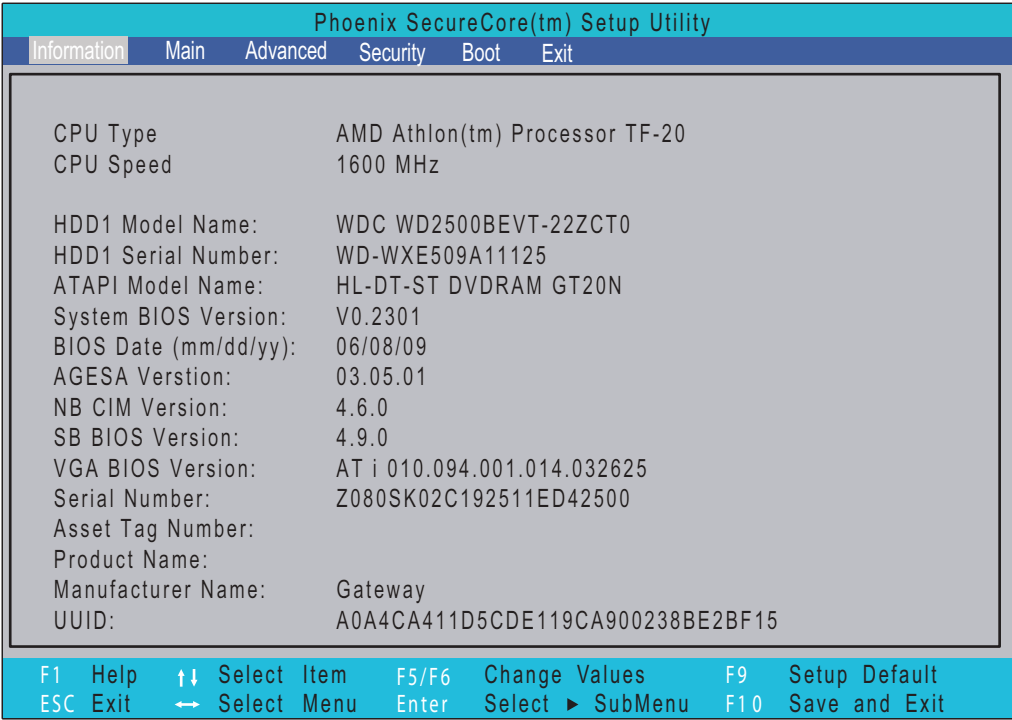

**NOTE:** The screen above is for your reference only. Actual values may differ according to model.

The table below describes the parameters in this screen.


| Parameter           | Description                                                                    |
|---------------------|--------------------------------------------------------------------------------|
| CPU Type            | This field shows the CPU type and speed of the system.                         |
| CPU Speed           | This field shows the speed of the CPU.                                         |
| HDD1 Model Name     | This field shows the model name of HDD1 installed on primary IDE master.       |
| HDD1 Serial Number  | This field displays the serial number of HDD1 installed on primary IDE master. |
| ATAPI Model Name    | This field shows the model name of the Optical device installed in the system. |
| System BIOS Version | Displays system BIOS version.                                                  |
| BIOS Date           | This field displays the BIOS date of the system.                               |
| AGESA Version       | This field displays the AGESA version of the system.                           |
| NB CIM Version      | This field displays the NB CIM version of the system.                          |
| SB CIM Version      | This field displays the SB CIM version of the system.                          |
| VGA BIOS Version    | This field displays the VGA firmware version of the system.                    |
| Serial Number       | This field displays the serial number of the unit.                             |
| Asset Tag Number    | This field displays the asset tag number of the system.                        |
| Product Name        | This field displays the product name of the system.                            |
| Manufacturer Name   | This field displays the manufacturer of this system.                           |

---

| Parameter   | Description                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UUID Number | Universally Unique Identifier (UUID) is an identifier standard used in software construction, standardized by the Open Software Foundation (OSF) as part of the Distributed Computing Environment (DCE). |

# Main

The Main screen allows the user to set the system time and date as well as enable and disable boot option and recovery.

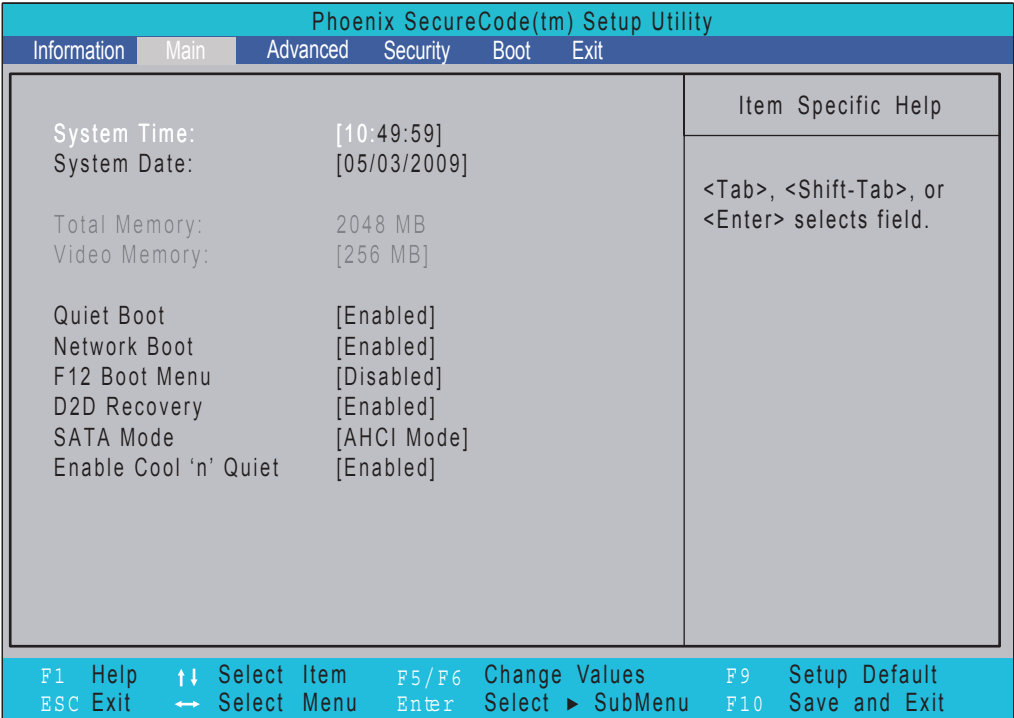


**NOTE:** The screen above is for your reference only. Actual values may differ.

The table below describes the parameters in this screen.

| Parameter             | Description                                                                                                                                                                                 | Format/Option                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| System Time           | Sets the system time. The hours are displayed with 24-hour format.                                                                                                                          | Format: HH:MM:SS (hour:minute:second) |
| System Date           | Sets the system date.                                                                                                                                                                       | Format MM/DD/YYYY (month/day/year)    |
| Total Memory          | This field reports the memory size of the system.                                                                                                                                           | N/A                                   |
| Video Memory          | This field shows the memory allocated for the video graphics.                                                                                                                               | N/A                                   |
| Quiet Boot            | Allows startup to skip certain tests while booting, decreasing the time needed to boot the system.                                                                                          | Option: <b>Enabled</b> or Disabled    |
| Network Boot          | Enables, disables the system boot from LAN (remote server).                                                                                                                                 | Option: <b>Enabled</b> or Disabled    |
| F12 Boot Menu         | Enables, disables Boot Menu during POST.                                                                                                                                                    | Option: <b>Enabled</b> or Enabled     |
| D2D Recovery          | Enables, disables D2D Recovery function. The function allows the user to create a hidden partition on hard disc drive to store operation system and restore the system to factory defaults. | Option: <b>Enabled</b> or Disabled    |
| SATA Mode             | Control the mode in which the SATA controller should operate.                                                                                                                               | Option: <b>AHCI</b> or IDE            |
| Enable Cool 'n' Quiet | Enables, disables Cool 'n' Quiet. The function reduces the clock rate and voltage when the processor is idle for lower power consumption and heat generation.                               | Option: <b>Enabled</b> or Disabled    |

# Advanced

The Advanced screen allows you to enable and disable advanced chipset options.

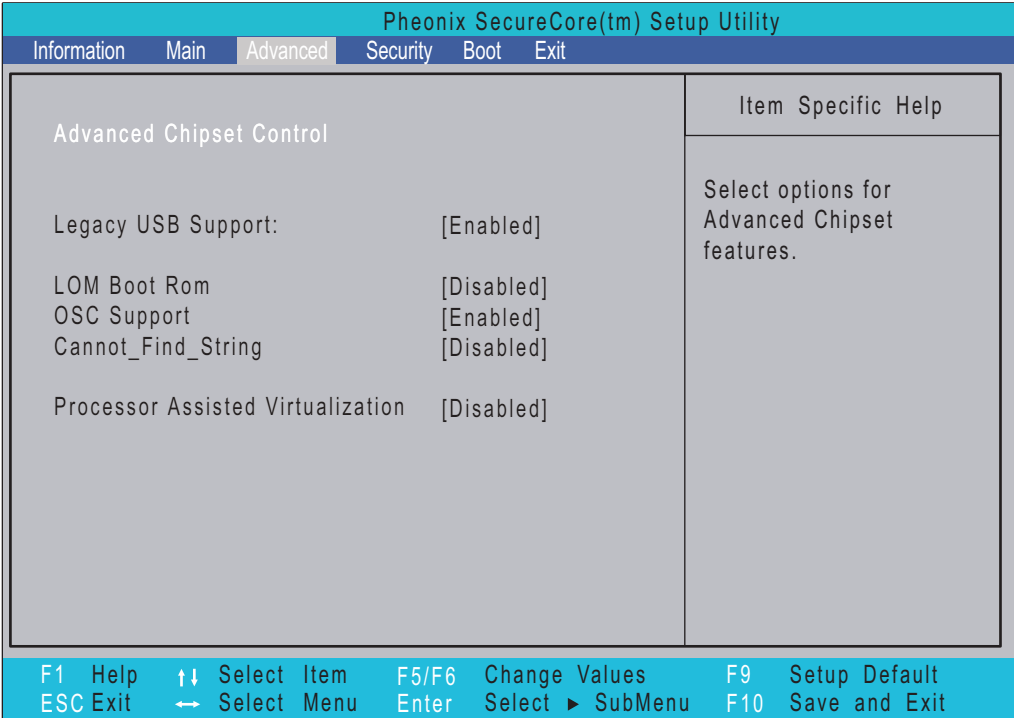


The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.

| Parameter                         | Description                                                                                         | Option                             |
|-----------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------|
| Legacy USB Support                | Enables, disables Legacy USB Support. The function allows the BIOS to interact with a USB keyboard. | Option: <b>Enabled</b> or Disabled |
| LOM Boot Rom                      | Enables, disables LOM Boot Rom.                                                                     | Option: Enabled or <b>Disabled</b> |
| OSC Support                       | Enables, disables operating system command support.                                                 | Option: <b>Enabled</b> or Disabled |
| Cannot_Find_String                | Enables, disables Cannot_Find_String command error message.                                         | Option: Enabled or <b>Disabled</b> |
| Processor Assisted Virtualization | Enables, disables Processor Assisted Virtualization.                                                | Option: Enabled or <b>Disabled</b> |

# Security

The Security screen contains parameters that help safeguard and protect your computer from unauthorized use.

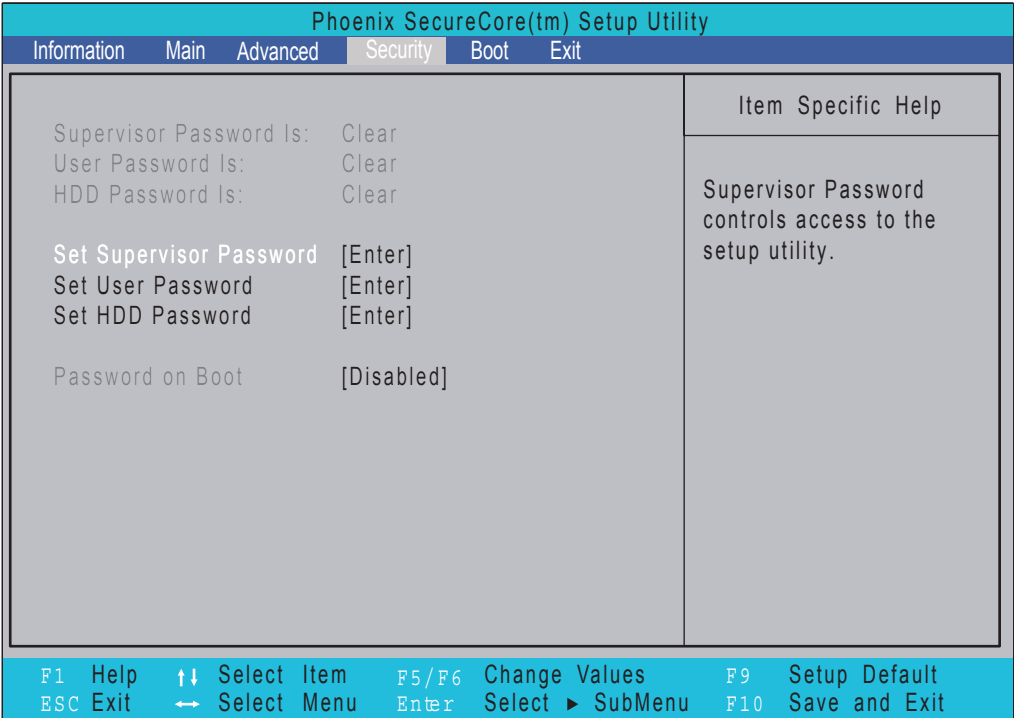

The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.

| Parameter               | Description                                                                                                                                                                                                                                          | Option                     |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Supervisor Password Is  | Shows the setting of the Supervisor password                                                                                                                                                                                                         | <b>Clear</b> or Set        |
| User Password Is        | Shows the setting of the user password.                                                                                                                                                                                                              | <b>Clear</b> or Set        |
| HDD Password Is         | Shows the setting of the hard disk password.                                                                                                                                                                                                         | <b>Clear</b> or Set        |
| Set Supervisor Password | Press Enter to set the supervisor password. When set, this password protects the BIOS Setup Utility from unauthorized access. The user can not either enter the Setup menu nor change the value of parameters.                                       | N/A                        |
| Set User Password       | Press Enter to set the user password. When user password is set, this password protects the BIOS Setup Utility from unauthorized access. The user can enter Setup menu only and does not have right to change the value of parameters.               | N/A                        |
| Set HDD Password        | Enter HDD Password.                                                                                                                                                                                                                                  | N/A                        |
| Password on Boot        | Defines whether a password is required or not while the events defined in this group happened. The following sub-options are all requires the Supervisor password for changes and should be grayed out if the user password was used to enter setup. | <b>Disabled</b> or Enabled |


**NOTE:** When you are prompted to enter a password, you have three tries before the system halts. Don't forget your password. If you forget your password, you may have to return your notebook computer to your dealer to reset it.

---

## Setting a Password

Follow these steps as you set the user or the supervisor password:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Supervisor Password box appears:

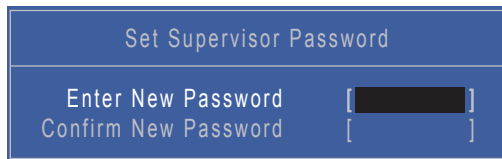

A blue rectangular dialog box titled "Set Supervisor Password". It contains two input fields: "Enter New Password" and "Confirm New Password", each followed by a pair of square brackets [ ] for text entry.

2. Type a password in the "Enter New Password" field. The password length can not exceed 8 alphanumeric characters (A-Z, a-z, 0-9, not case sensitive). Retype the password in the "Confirm New Password" field.

**IMPORTANT:** Be very careful when typing your password because the characters do not appear on the screen.

3. Press **Enter**. After setting the password, the computer sets the User Password parameter to "Set".
4. If desired, you can opt to enable the Password on boot parameter.
5. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

## Removing a Password

Follow these steps:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears:



A blue rectangular dialog box titled "Set Supervisor Password". It contains three input fields: "Enter Current Password", "Enter New Password", and "Confirm New Password", each followed by a pair of square brackets [ ] for text entry.

2. Type the current password in the Enter Current Password field and press **Enter**.
3. Press **Enter** twice **without** typing anything in the Enter New Password and Confirm New Password fields. The computer then sets the Supervisor Password parameter to "Clear".
4. When you have changed the settings, press u to save the changes and exit the BIOS Setup Utility.

## Changing a Password

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears:




A blue rectangular dialog box titled "Set Supervisor Password". It contains three input fields: "Enter Current Password", "Enter New Password", and "Confirm New Password", each followed by a pair of square brackets [ ] for text entry.

2. Type the current password in the Enter Current Password field and press **Enter**.
3. Type a password in the Enter New Password field. Retype the password in the Confirm New Password field.
4. Press **Enter**. After setting the password, the computer sets the User Password parameter to "Set".
5. If desired, you can enable the Password on boot parameter.

---


6. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

If the verification is OK, the screen will display as following.

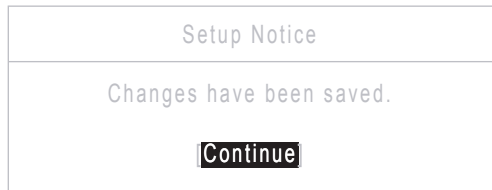

The password setting is complete after the user presses **Enter**.

If the current password entered does not match the actual current password, the screen will show you the Setup Warning.

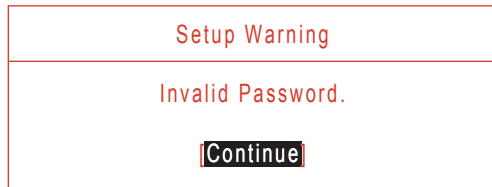


If the new password and confirm new password strings do not match, the screen will display the following message.



# Boot


This menu allows the user to decide the order of boot devices to load the operating system. Bootable devices includes the USB diskette drives, the onboard hard disk drive and the DVD drive in the module bay.

Select Boot Devices to select specific devices to support boot.

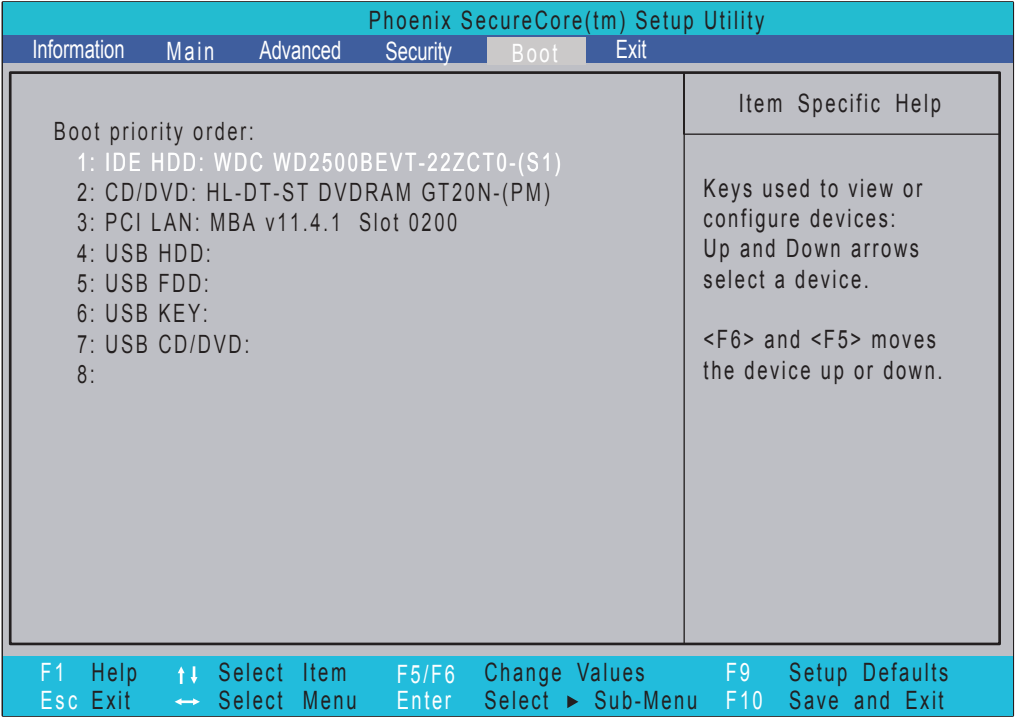

# Exit

The Exit screen allows you to save or discard any changes you made and quit the BIOS Utility.

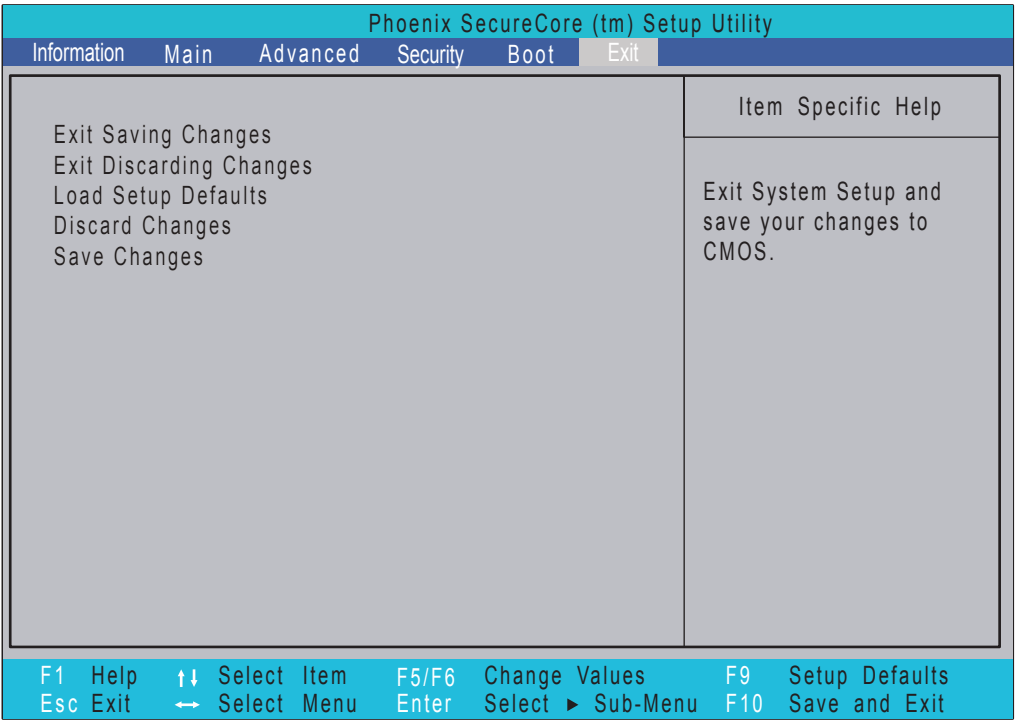

The table below describes the parameters in this screen.

| Parameter               | Description                                         |
|-------------------------|-----------------------------------------------------|
| Exit Saving Changes     | Exit System Setup and save your changes to CMOS.    |
| Exit Discarding Changes | Exit utility without saving setup data to CMOS.     |
| Load Setup Default      | Load default values for all SETUP item.             |
| Discard Changes         | Load previous values from CMOS for all SETUP items. |
| Save Changes            | Save Setup Data to CMOS.                            |

---

# BIOS Flash Utility

The BIOS flash memory update is required for the following conditions:

- New versions of system programs
- New features or options
- Restore a BIOS when it becomes corrupted.

Use the Flash16 utility to update the system BIOS flash ROM.

**NOTE:** Do not install memory-related drivers (XMS, EMS, DPML) when you use the Flash16 Utility.

**NOTE:** Please use the AC adaptor power supply when you run the flashit utility. If the battery pack does not contain enough power to finish the BIOS flash, you may not boot the system because the BIOS is not completely loaded.

## Using the Flash16 Utility to Update the BIOS

Follow the steps below to run the Flash16 Utility.

1. Prepare a bootable diskette.
2. Copy the flash utilities to the bootable diskette.
3. Boot the system from the bootable diskette.
4. Run Phlash16.exe z08\_2301.wph /mode=3 /x. After flashing the BIOS the system will restart.
5. During POST, press F2 to enter into the BIOS setup screen.
6. Navigate to the Exit page, choose Load Setup Defaults then press ENTER.
7. When a Setup Confirmation appears, choose 'Yes'. The system will restart with the BIOS settings included in the utility.

## WinFlash Utility

Perform the following steps to use the WinFlash Utility:

1. Double-click the WinFlash executable.
2. Click **OK** to begin the update. WinFlash closes all applications and shuts down the system.

**NOTE:** Place only one \*.wph file with flash32.exe in the same folder when executing this procedure.

# Remove HDD/BIOS Password Utilities

This section provides you with details about removing HDD/BIOS password:


## Remove HDD Password:

If you key in the wrong HDD password three times, an error is generated.



To reset the HDD password, perform the following steps:

1. An error code is generated for unlocking the HDD. Note down this code.

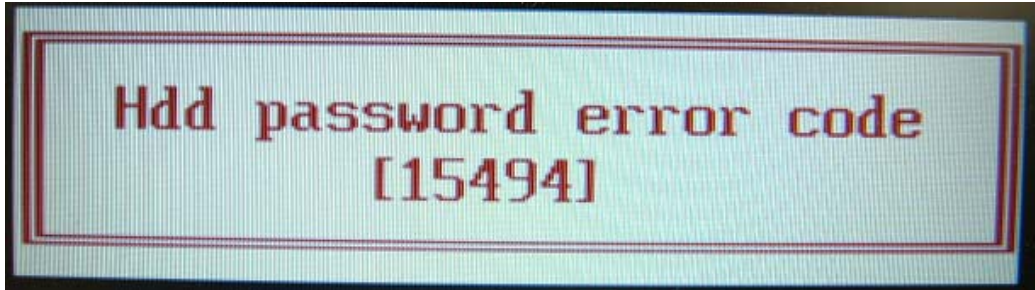

2. Run **HDD\_PW.EXE** in DOS Mode.
3. Create the unlock code by inserting the numbers noted in the previous step into the following format:

**hdd\_pw 15494 0**



4. Select 2 to obtain the password. The following passwords can be used for unlocking the HDD.

**Password: 0KJFN42**

**Password: UVEIQ96**

5. Shut down the computer by pressing down the Power button for 4 seconds.
6. Turn on the computer and key in the password to unlock the HDD.

### Removing BIOS Passwords:


To clear the User or Supervisor passwords through hardware, open the WLAN door and use a metal instrument to short the **J1** jumper.



### Cleaning BIOS Passwords


To clean the User or Supervisor passwords using software utilities, perform the following steps:

If you key in the wrong BIOS password three times, an error is generated.



To reset the BIOS password, perform the following steps:

1. An error code is generated for unlocking the BIOS. Note down this code.

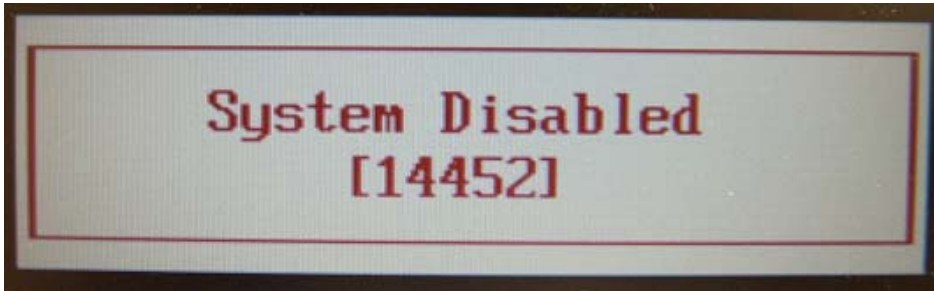

2. Create the unlock code by inserting the numbers noted in the previous step into the following format:

bios\_pw 14452 0

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\M54>d:
D:\>bios_pw 14452 0
unlock6.exe v1.0 1 July 1997
qjjg9vy
07yqmjd
cjl14tm
6mbzjaJ
D:\>
```

3. Select 2 to obtain the password. The following passwords can be used for unlocking the BIOS

Password: qjjg9vy  
Password: 07yqmjd  
Password: cjl14tm  
Password: 6mbzjaJ

4. Shut down the computer by pressing down the Power button for 4 seconds.
5. Turn on the computer and key in the password to unlock the BIOS.
6. Press 1 or 2 to clean the desired password shown on the screen.

## Using Boot Sequence Selector

The Boot Sequence Selector allows the boot order to be changed without accessing the BIOS. To use Boot Sequence Selector, perform the following steps:

1. Enter into DOS.
2. Execute **BS.exe** to display the usage screen.

```
d:\B00TSEQ>bs

*** Boot Sequence Selector Version 0.03 ***
Create by Rockwell Chuang 10/01/2005.

Usage:
      BS [ 1 | 2 | 3 | 4 ]

BS 1 : [ Floppy ] => [ HardDisk ] => [ CD-ROM ] => [ LAN ]
BS 2 : [ HardDisk ] => [ CD-ROM ] => [ LAN ] => [ Floppy ]
BS 3 : [ CD-ROM ] => [ HardDisk ] => [ LAN ] => [ Floppy ]
BS 4 : [ LAN ] => [ Floppy ] => [ HardDisk ] => [ CD-ROM ]

d:\B00TSEQ>
```

3. Select the desired boot sequence by entering the corresponding sequence. For example, enter **BS2** to change the boot sequence to HDD | CD ROM | LAN | Floppy.

## Using DMITools

The DMI (Desktop Management Interface) Tool copies BIOS information to EEPROM to be used in the DMI pool for hardware management.

When the BIOS displays **Verifying DMI pool data** it is checking that the table correlates with the hardware before sending to the operating system (Windows, etc.).

To update the DMI Pool, perform the following steps:

1. Boot into DOS.
2. Execute **dmitools**. The following messages report to screen to confirm completion:
  - dmitools /r ==> Read dmi string from bios
  - dmitools /wm xxxx ==> Write manufacturer name to eeprom (max. 16 characters)
  - dmitools /wp xxxx ==> Write product name to eeprom (max. 16 characters)
  - dmitools /ws xxxx ==> Write serial number to eeprom (max. 22 characters)
  - dmitools /wu xxxx ==> Write uuid to eeprom
  - dmitools /wa xxxx ==> Write asset tag to eeprom (max. 32 characters)

The following examples show the commands and the corresponding output information.

### Read DMI Information from Memory

**Input:**

```
dmitools /r
```

**Output:**

```
Manufacturer (Type1, Offset04h): Acer
```

```
Product Name (Type1, Offset05h): TravelMate xxxxx
```

```
Serial Number (Type1, Offset07h): 01234567890123456789
```

```
UUID String (Type1, Offset08h): xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx
```

```
Asset Tag (Type3, Offset04h): Acer Asstag
```

### Write Product Name to EEPROM

**Input:**

```
dmitools /wp Acer
```

### Write Serial Number to EEPROM

**Input:**

---

dmitools /ws 01234567890123456789

#### 4). Write UUID to EEPROM (Create UUID from Intel WFM20.pdf)

Input:

dmitools /wu

#### 5). Write Asset Tag to EEPROM

Input:

dmitools /wa Acer Asstag

**NOTE:** When using any of the Write options, restart the system to make the new DMI data effective.

### Using the LAN MAC EEPROM Utility

You can use the MAC.BAT utility to write the MAC.CFG file to the EEPROM under DOS mode.

1. Use a text editor (for example: Notepad) to open the MAC.CFG file. You can see the MAC.CFG contents as below:



|                            |                  |
|----------------------------|------------------|
| WriteData = '001122334455' | MAC value        |
| StartAddr=7A               | MAC address      |
| WriteLeng=6                | MAC value length |
| KeepByte=0                 | don't care       |

- WriteData= '001122334455' <----- MAC value
  - StartAddr=7A <----- MAC address
  - WriteLeng=6 <----- MAC value length
  - KeepByte=0 <----- can be any value
2. Boot into DOS.
  3. Execute **MAC.BAT** to write MAC information to eeprom.

---

```
C:\MAC>mac.bat
```

```
C:\MAC>eeprom w MAC.cfg
```

```
Progress --> \
```

```
Write Data to EEPROM OK!!
```



# Machine Disassembly and Replacement

---

This chapter contains step-by-step procedures on how to disassemble the notebook computer for maintenance and troubleshooting.

## Disassembly Requirements

To disassemble the computer, you need the following tools:

- Wrist grounding strap and conductive mat for preventing electrostatic discharge
- Flat screwdriver
- Philips screwdriver
- Plastic flat screwdriver
- Plastic tweezers

**NOTE:** The screws for the different components vary in size. During the disassembly process, group the screws with the corresponding components to avoid mismatch when putting back the components.

## Related Information

The product previews seen in the disassembly procedures may not represent the final product color or configuration.

# General Information

## Pre-disassembly Instructions

Before proceeding with the disassembly procedure, make sure that you do the following:

- 1. Turn off the power to the system and all peripherals.
- 2. Unplug the AC adapter and all power and signal cables from the system.



- 3. Place the system on a flat, stable surface.
- 4. Remove the battery pack.

## Disassembly Process

The disassembly process is divided into the following sections:

- External components disassembly
- Main unit disassembly
- LCD module disassembly


The flowcharts provided in the succeeding disassembly sections illustrate the entire disassembly sequence. Observe the order of the sequence to avoid damage to any of the hardware components. For example, if you want to remove the Mainboard, you must first remove the Keyboard then disassemble the inside assembly frame in that order.

### Main Screw List

| Screw                   | Quantity | Part Number  |
|-------------------------|----------|--------------|
| M2.0*3.5-I-NI-NYLOK     | 4        | 86.T23V7.005 |
| M2.0*3.0-I-NI-NYLOK     | 16       | 86.A08V7.005 |
| M2.5*6.0-I(BNI)(NYLOK)  | 35       | 86.W0907.002 |
| M3.0 D 3L K 5.0 D ZK NL | 2        | 86.AZ802.001 |

# External Module Disassembly Process

## External Modules Disassembly Flowchart

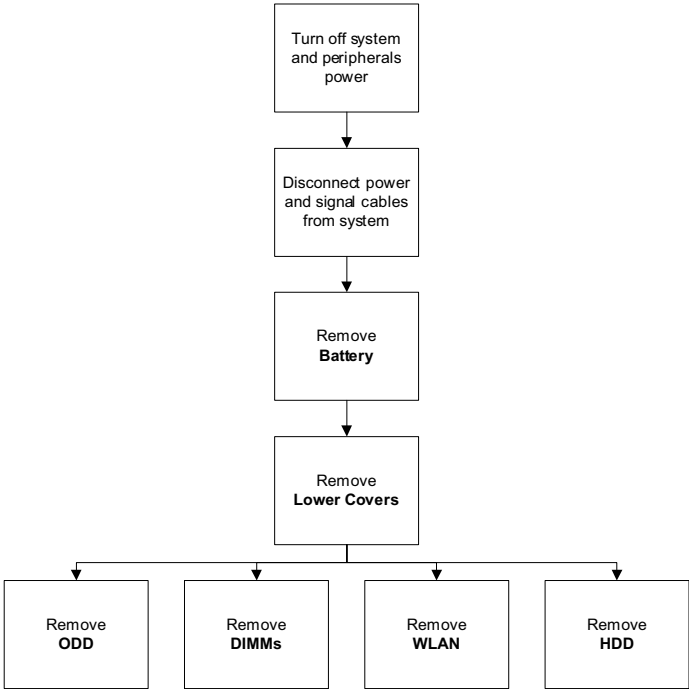

### Screw List

| Step        | Screw    | Quantity | Part No.     |
|-------------|----------|----------|--------------|
| ODD Module  | M2.5*6.0 | 1        | 86.W0907.002 |
|             | M2*3     | 2        | 86.A08V7.005 |
| WLAN Module | M2*3     | 1        | 86.A08V7.005 |
| HDD Module  | M2.5*6.0 | 2        | 86.W0907.002 |
|             | M3*3     | 2        | 86.N2802.005 |

---

## Removing the Battery Pack

1. Turn the computer over.
2. Slide the battery lock/unlock latch to the unlock position.




3. Slide and hold the battery release latch to the release position (1), then slide out the battery pack from the main unit (2).



---

## Removing the Lower Covers

1. See “Removing the Battery Pack” on page 46.
2. Loosen the six captive screws in the Memory and Wireless Covers.

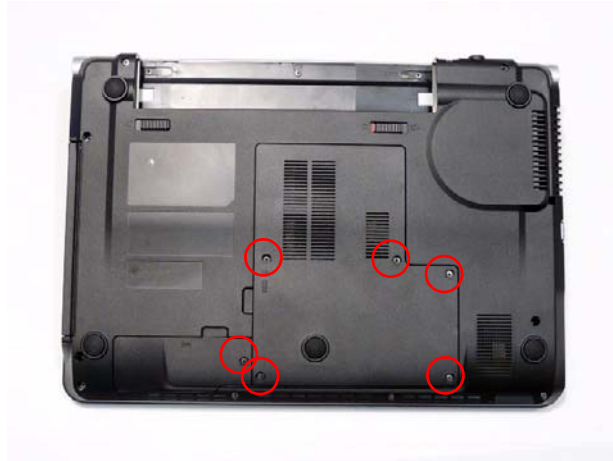

3. Lift the Wireless Cover up to remove.



4. Lift the Memory Cover up to remove.




# Removing the ODD Module

- 1. See “Removing the Lower Covers” on page 47.
- 2. Remove the single screw securing the ODD Module in place.



| Step       | Size     | Quantity | Screw Type                                                                          |
|------------|----------|----------|-------------------------------------------------------------------------------------|
| ODD Module | M2.5*6.0 | 1        |  |

- 3. Slide the ODD Module out of the Lower Cover as shown.

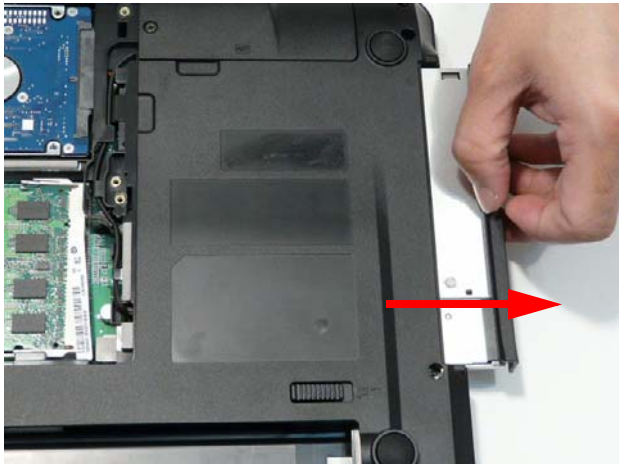

4. Remove the two screws securing the ODD Bracket to the ODD Module.



| Step       | Size | Quantity | Screw Type                                                                          |
|------------|------|----------|-------------------------------------------------------------------------------------|
| ODD Module | M2*3 | 2        |  |

5. Remove the bracket from the ODD Module.




6. Remove the ODD Bezel by rotating the bezel downward, away from the module.




---

## Removing the DIMM Modules

1. See “Removing the Lower Covers” on page 47.
2. Push out the release latches on both sides of the DIMM socket to release the DIMM module.

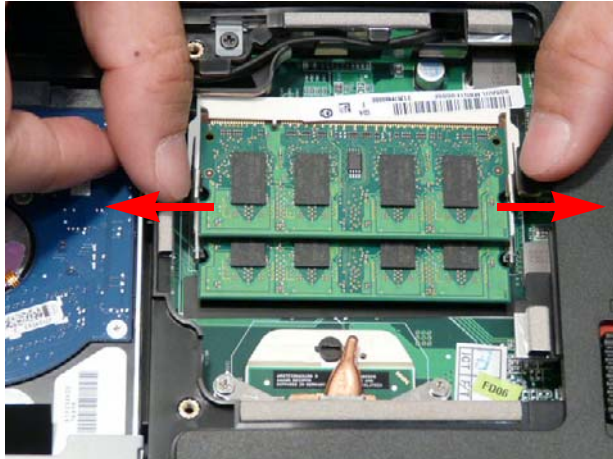

3. Remove the DIMM module.

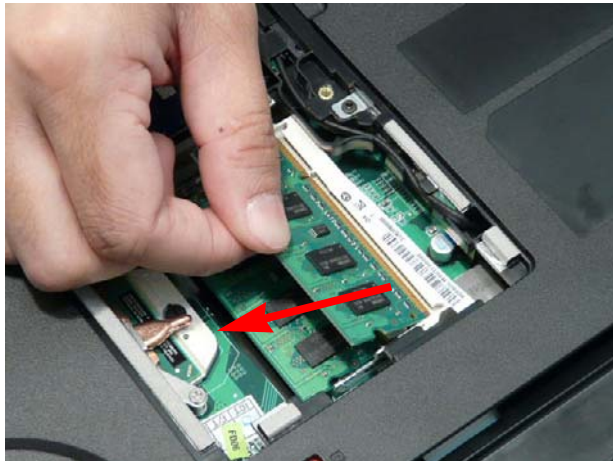

4. Repeat for the second DIMM Module.

# Removing the WLAN Module

- 1. See “Removing the Lower Covers” on page 47.
- 2. Disconnect the antenna cables from the WLAN Module.

**IMPORTANT:**The black cable attaches to the **Main** terminal and the white cable attaches to the **AUX** terminal.



- 3. Move the antennas away and remove the single screw on the WLAN Module.



| Step        | Size | Quantity | Screw Type                                                                            |
|-------------|------|----------|---------------------------------------------------------------------------------------|
| WLAN Module | M2*3 | 1        |  |

- 
4. Detach the WLAN Module from the WLAN socket.



**NOTE:** When reattaching the antennas, ensure the cables are tucked into the chassis to prevent damage.


# Removing the HDD Module

- 1. See “Removing the Lower Covers” on page 47.
- 2. Remove the two screws securing the HDD to the Lower Cover.




| Step       | Size     | Quantity | Screw Type                                                                         |
|------------|----------|----------|------------------------------------------------------------------------------------|
| HDD Module | M2.5*6.0 | 2        |  |

- 3. Slide the HDD Module in the direction of the arrow to disconnect the interface.

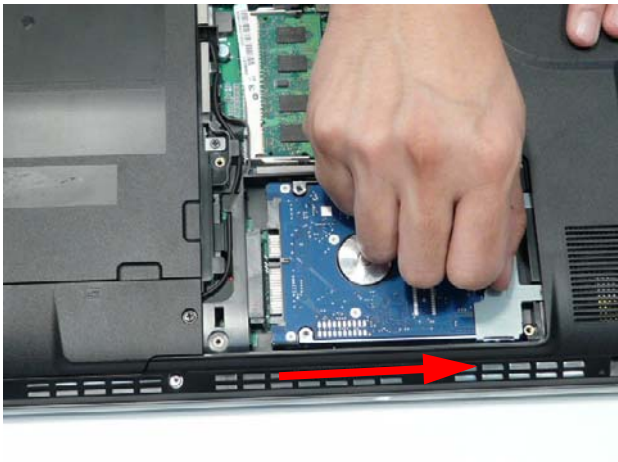


4. Lift the HDD Module clear of the Lower Cover as shown.

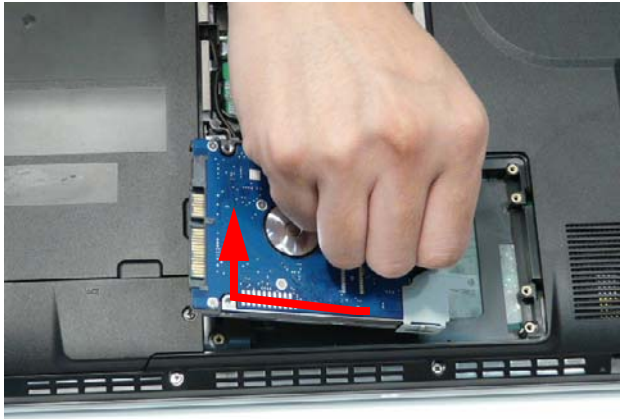


**NOTE:** To prevent damage to device, avoid pressing down on it or placing heavy objects on top of it.

5. Remove the two screws securing the HDD to the Carrier.

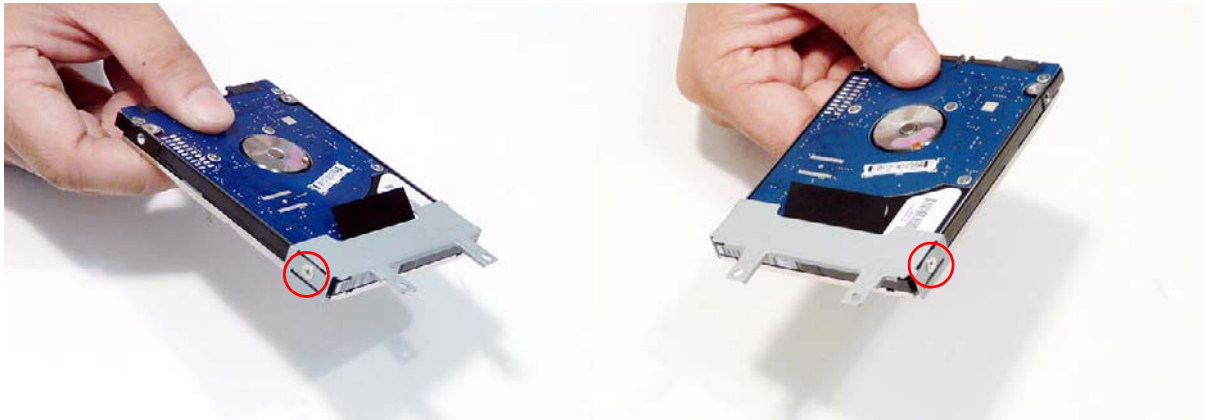

| Step       | Size | Quantity | Screw Type                                                                           |
|------------|------|----------|--------------------------------------------------------------------------------------|
| HDD Module | M3*3 | 2        |  |

6. Remove the HDD from the Carrier as shown.

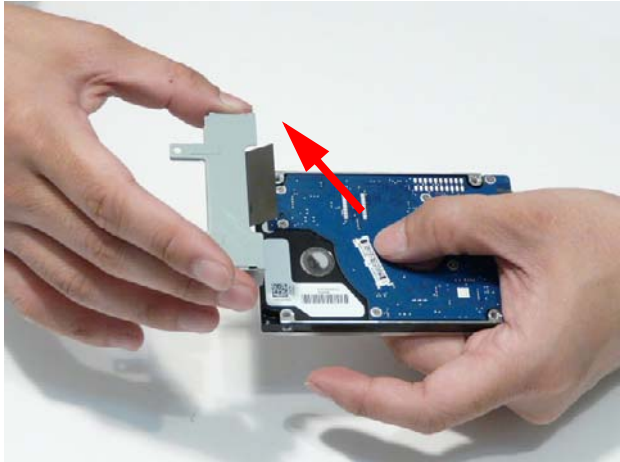

# Main Unit Disassembly Process

## Main Unit Disassembly Flowchart



### Screw List

| Step            | Screw    | Quantity | Part No.     |
|-----------------|----------|----------|--------------|
| Switch Cover    | M2.5*6.0 | 3        | 86.W0907.002 |
| LCD Module      | M2.5*6.0 | 4        | 86.W0907.002 |
| Upper Cover     | M2.5*6.0 | 8        | 86.W0907.002 |
|                 | M2.5*6.0 | 10       | 86.W0907.002 |
| Speaker Modules | M2*3     | 4        | 86.A08V7.005 |
| Modem Board     | M2*3     | 2        | 86.A08V7.005 |
| USB Board       | M2*3     | 1        | 86.A08V7.005 |
| Mainboard       | M2.5*6.0 | 1        | 86.W0907.002 |

# Removing the Switch Cover

**IMPORTANT:**The Media Board attached to the underside of the Switch Cover cannot be replaced individually. If the Media Board malfunctions, replace the entire Switch Cover assembly.

- 1. See “Removing the Battery Pack” on page 46.
- 2. Remove the three screws securing the Switch Cover to the Upper Cover.




| Step         | Size     | Quantity | Screw Type                                                                         |
|--------------|----------|----------|------------------------------------------------------------------------------------|
| Switch Cover | M2.5*6.0 | 3        |  |

- 3. Open the LCD Panel to approximately 45° and stand the computer on edge.
- 4. Insert a suitable plastic tool in to the right side screw hole and push the Switch Cover to release the securing clips.




5. Turn the computer over rotate the Switch Cover as shown to expose the underside.

**IMPORTANT:** Do not remove the Switch Cover from the Upper Cover; the Media Board FFC is still attached to the Switch Cover.

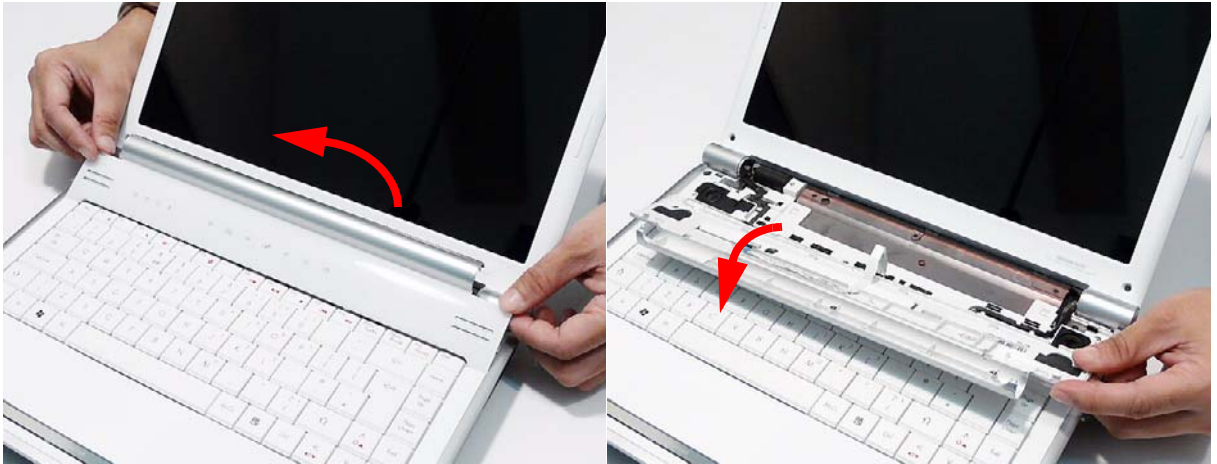

6. Open the FFC locking latch and disconnect the Media Board FFC as shown.

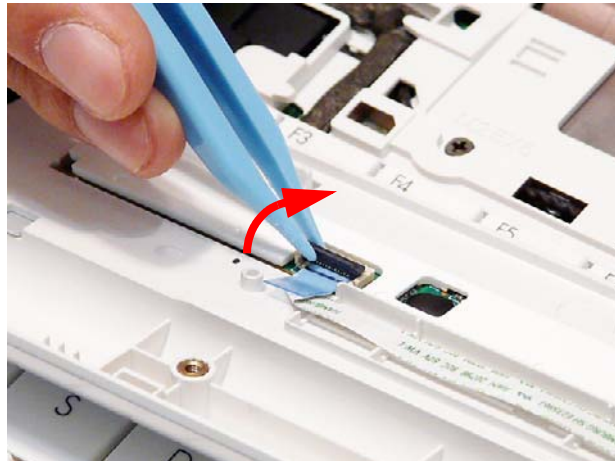

7. Lift the FFC to detach the adhesive securing it in place.



8. Lift the Switch Cover clear of the Upper Cover.

---

## Removing the Keyboard


1. See “Removing the Switch Cover” on page 56.
2. Grasp the Keyboard and lift upward as shown.



3. Turn the Keyboard over and place it on the TouchPad area as shown.




4. Lift the Keyboard FFC securing latch as shown.

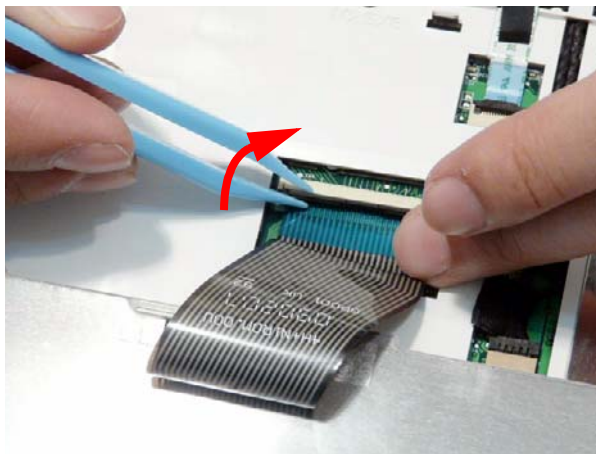


5. Disconnect the FFC and remove the Keyboard.

- 
6. Lift the Switch Cover FFC securing latch as shown.

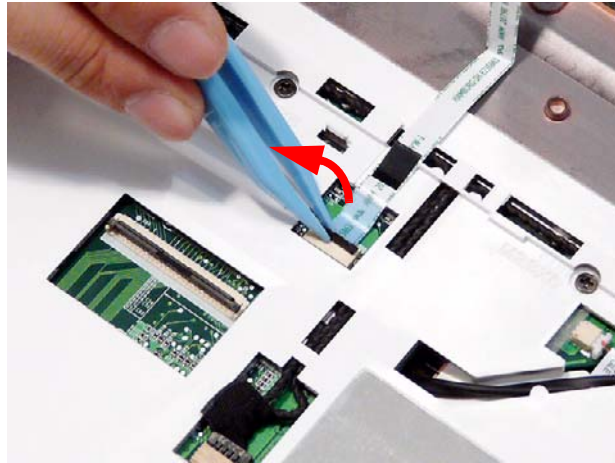


7. Remove the Switch Cover FFC from the Upper Cover.

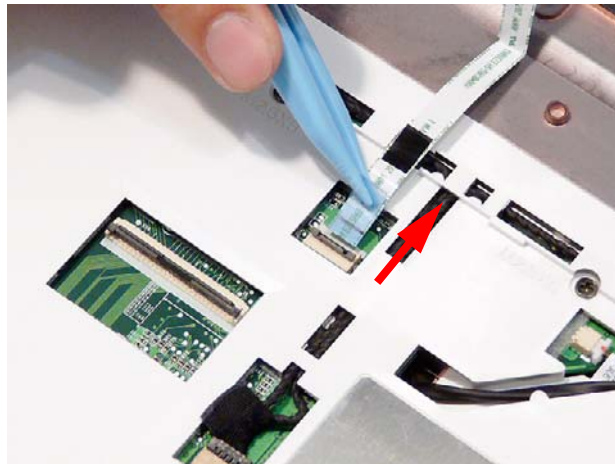


---

## Removing the LCD Module


1. See “Removing the Keyboard” on page 58.
2. Turn the computer over. Remove the two screws securing the LCD Module to Lower Cover.

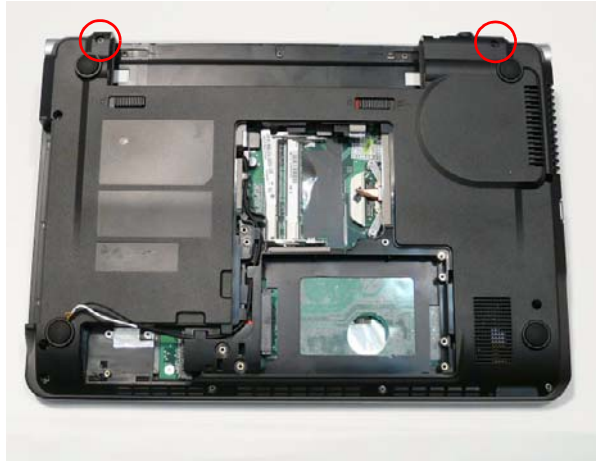


3. Remove the Antenna cables from the cable channel as shown. Ensure that the cables are free from all clips.

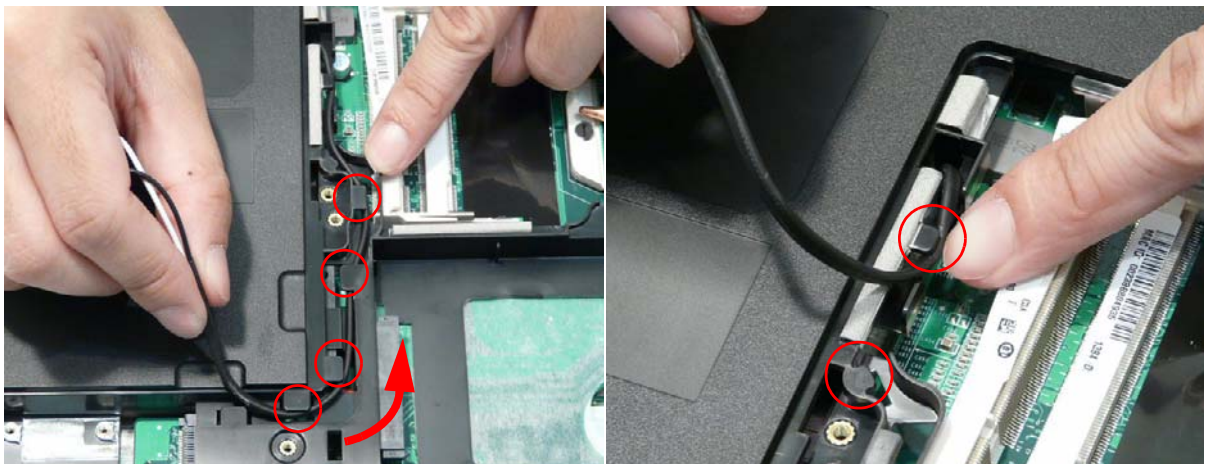


4. Carefully pull the Antenna cables through from the underside of the computer.

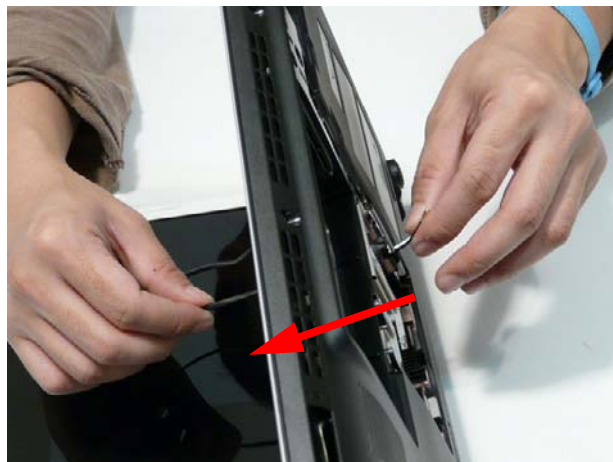


5. Turn the computer over and remove the Antennas from the Upper Cover cable channel. Ensure that the cables are free from all clips all the way to the hinge well.

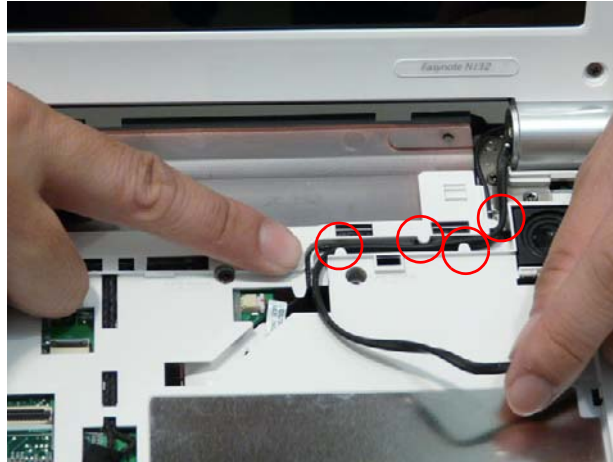


6. Disconnect the Power Board cable from the Mainboard.

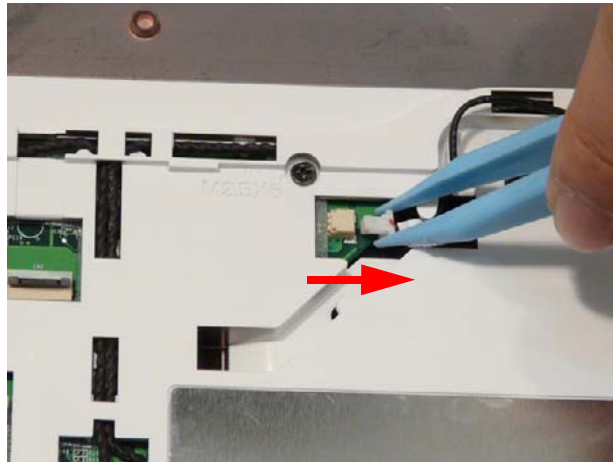


7. Remove the Power Board cable from the Upper Cover cable channel. Ensure that the cable is free from all clips all the way to the hinge well.

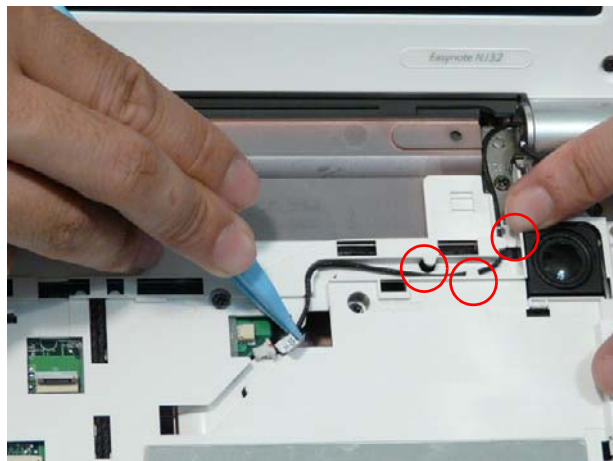


- 
8. Disconnect the LVDS cable from the Mainboard.

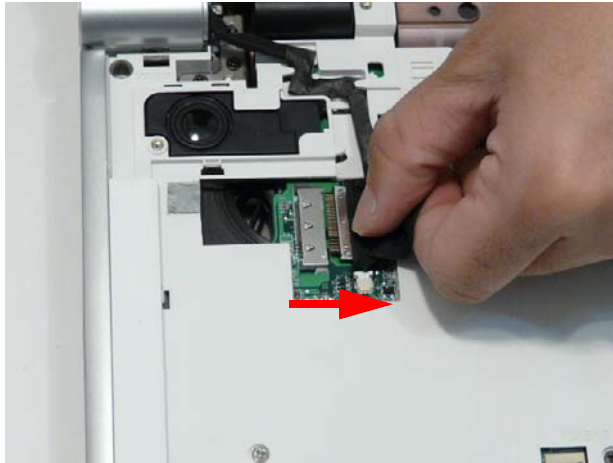

9. Disconnect the Microphone cable from the Mainboard.

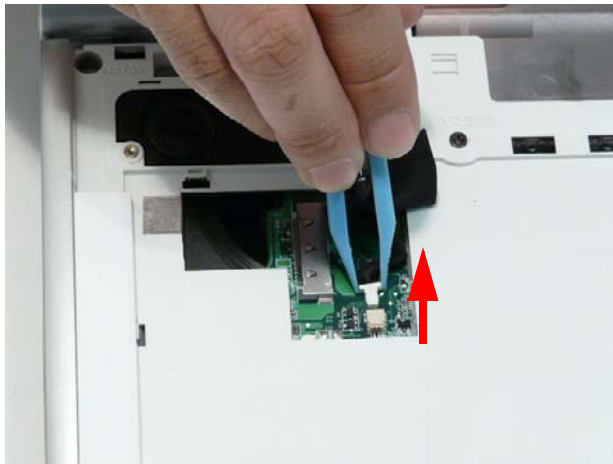

10. Remove the LVDS and Microphone cables from the Upper Cover cable channel. Ensure that the cables are free from all clips all the way to the hinge well.

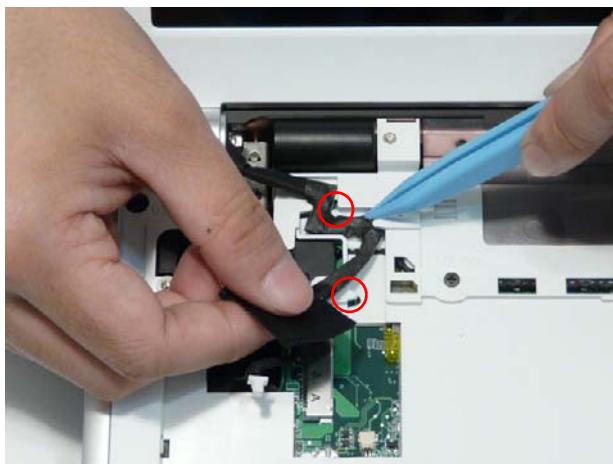


11. Remove the four screws securing the LCD Module to the Upper Cover.



| Step       | Size     | Quantity | Screw Type                                                                          |
|------------|----------|----------|-------------------------------------------------------------------------------------|
| LCD Module | M2.5*6.0 | 4        |  |


**IMPORTANT:**Ensure all cables are clear of the lower cover before removing the LCD module.

12. Grasp the module with both hands and lift upwards.

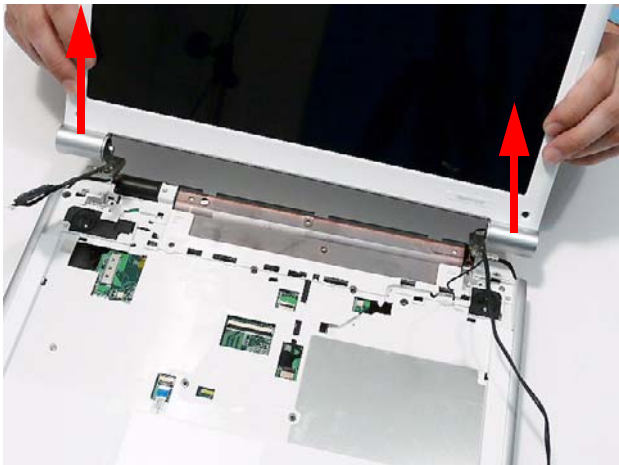

# Removing the Upper Cover

- 1. See “Removing the LCD Module” on page 60.
- 2. Turn the computer over. Remove the eight securing screws.

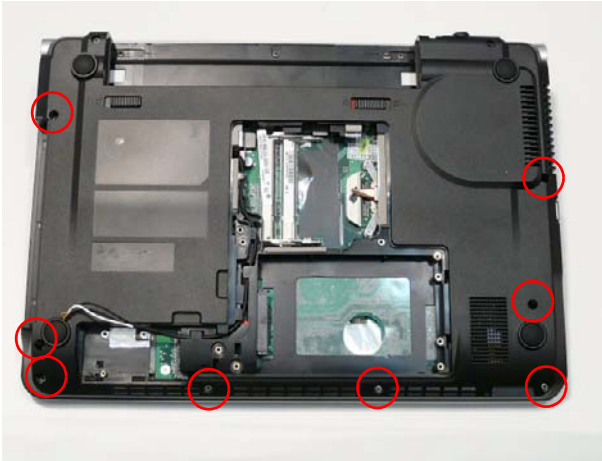

| Step        | Size     | Quantity | Screw Type                                                                          |
|-------------|----------|----------|-------------------------------------------------------------------------------------|
| Upper Cover | M2.5*6.0 | 8        |  |


- 3. Turn the computer over and disconnect the following cables from the Mainboard.




4. Open the FFC securing latch and disconnect A as shown.



5. Disconnect B as shown.

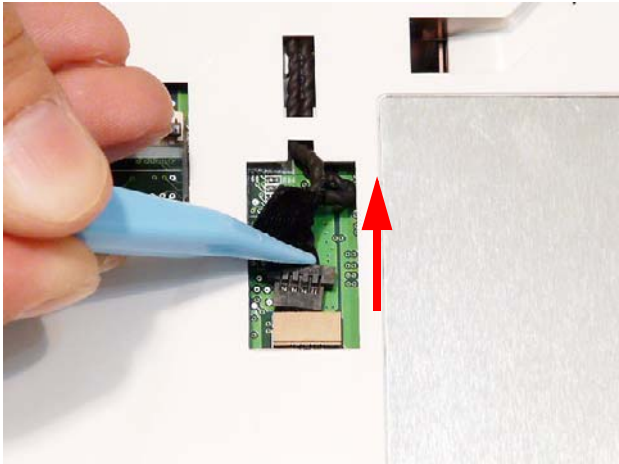

6. Remove the nine screws securing the Upper Cover.

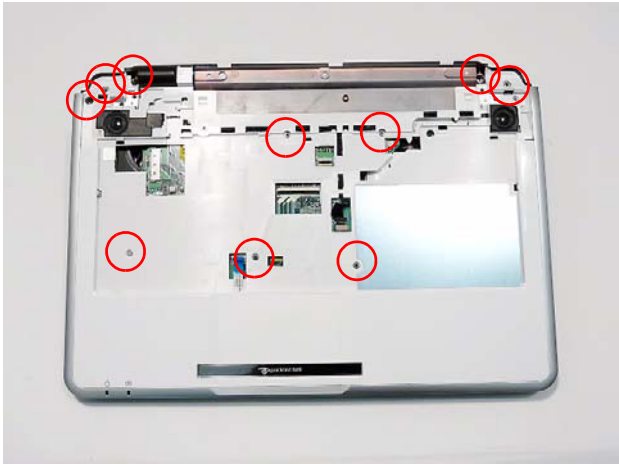

| Step        | Size     | Quantity | Screw Type                                                                            |
|-------------|----------|----------|---------------------------------------------------------------------------------------|
| Upper Cover | M2.5*6.0 | 10       |  |

- 
7. Lift the Upper Cover clear of the computer as shown.




---


## Removing the Speaker Modules

**CAUTION:** Select models include speaker pads to reduce sound vibration. Do not remove these pads during disassembly.


1. See “Removing the Upper Cover” on page 64.
2. Lift the plastic covering away from the Upper Cover to expose the Speaker cables.

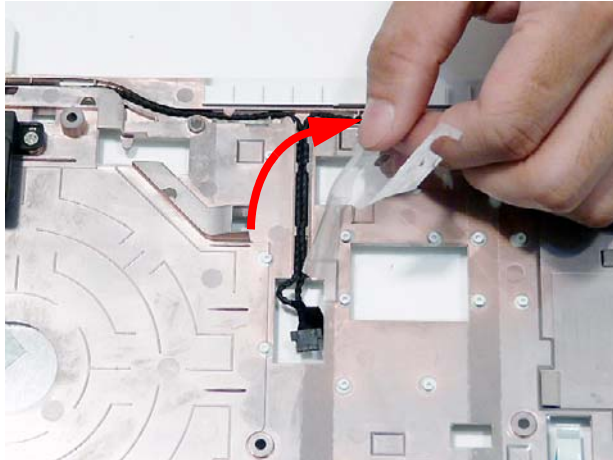


3. Remove the Speaker cables from the cable channel. Ensure that the cables are free from all cable clips.

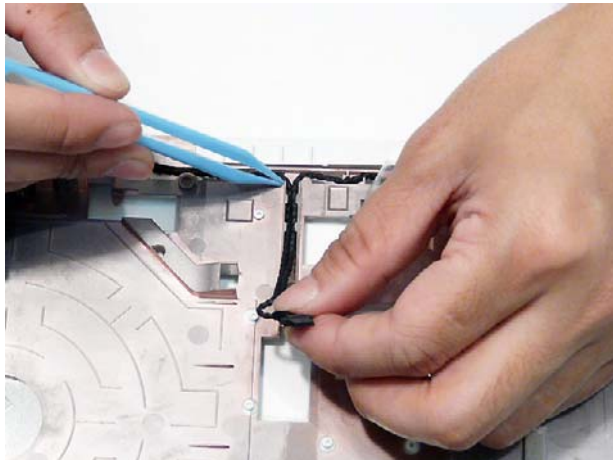



4. Continue removing the cable from the right side cable channel. Ensure that the cable is free from all cable clips.

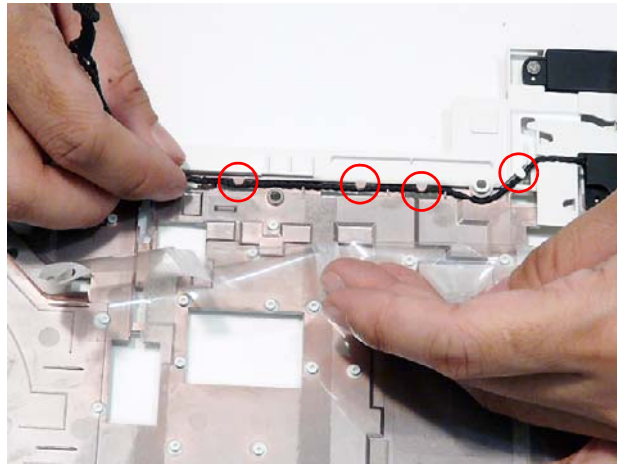

5. Remove the cable from the left side cable channel. Ensure that the cable is free from all cable clips.

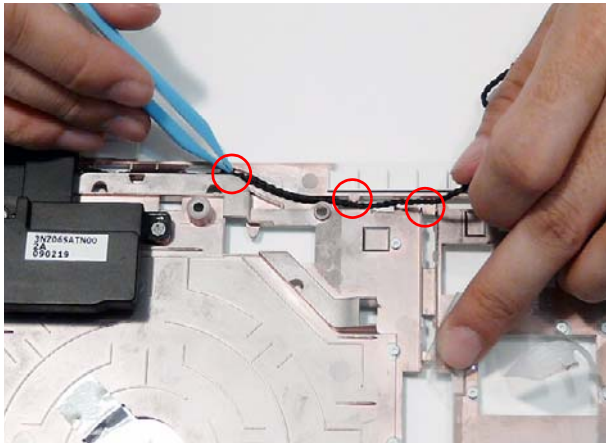


6. Remove the four securing screws from the Speaker Modules.

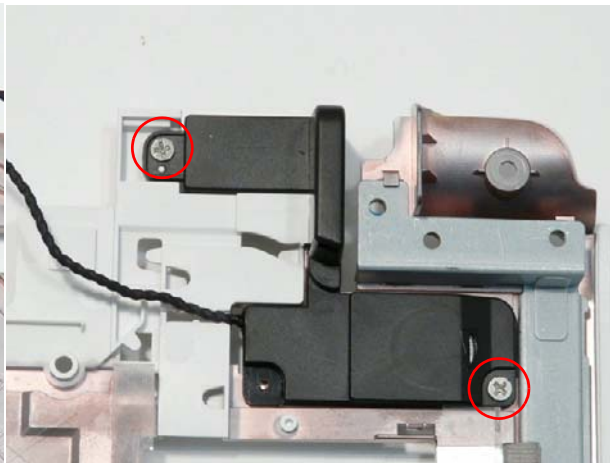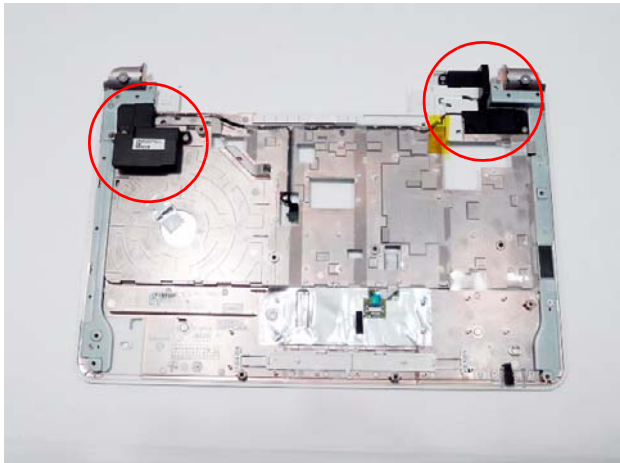

| Step            | Size | Quantity | Screw Type                                                                            |
|-----------------|------|----------|---------------------------------------------------------------------------------------|
| Speaker Modules | M2*3 | 4        |  |

- 
7. Lift the Speaker Modules clear of the Upper Cover.

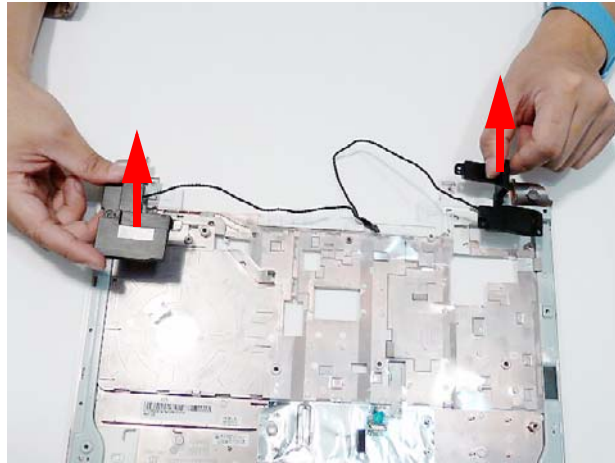


---

## Removing the TouchPad FFC


**IMPORTANT:** It is not possible to remove the TouchPad individually. If the TouchPad malfunctions, follow the disassembly steps to remove any additional components on the Upper Cover and replace the entire Upper Cover.

1. See “Removing the Upper Cover” on page 64.
2. Open the TouchPad FFC locking latch and disconnect the FFC as shown.

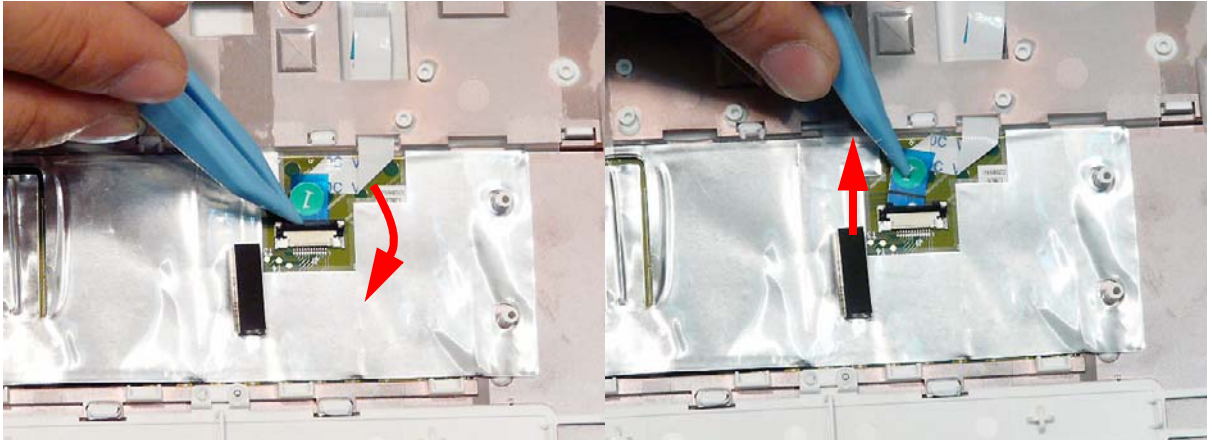


3. Carefully pull the FFC through the Upper Cover as shown.

**IMPORTANT:** Take care not to tear the FFC pull tab during removal.

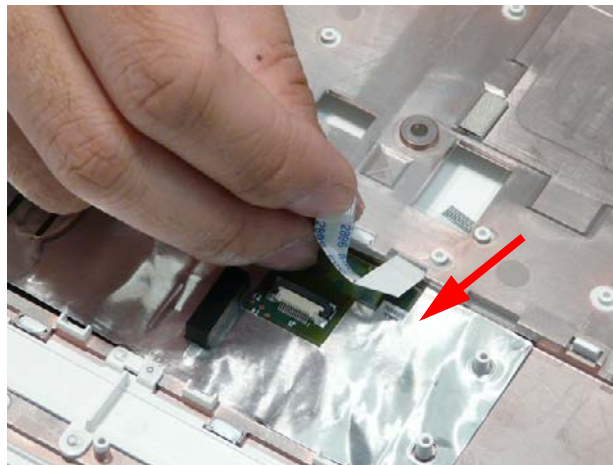

# Removing the Modem Board

- 1. See “Removing the Upper Cover” on page 64.
- 2. Remove the two securing screws from the Modem Board.

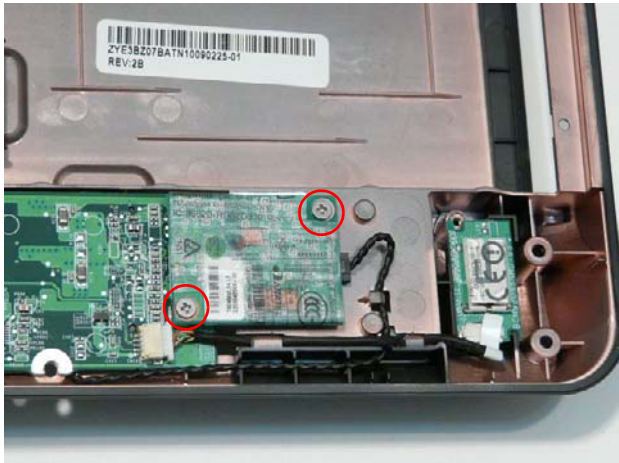


| Step        | Size | Quantity | Screw Type                                                                          |
|-------------|------|----------|-------------------------------------------------------------------------------------|
| Modem Board | M2*3 | 2        |  |

- 3. Lift the Modem Board clear of the Lower Cover.

**IMPORTANT:**Do not remove the Modem from the Lower Cover; the Modem cable is still attached to the module.



- 
4. Turn the Modem Board over and disconnect the Modem cable as shown.

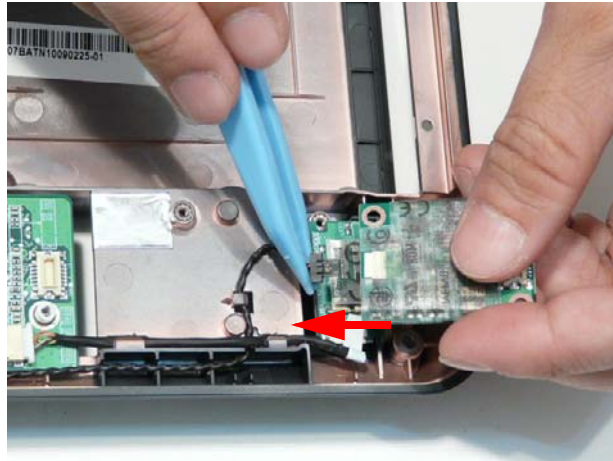

5. Remove the Modem Board from the Lower Cover.


---

## Removing the Bluetooth Module


1. See “Removing the Upper Cover” on page 64.
2. Disconnect the Bluetooth cable from the Mainboard.




3. Remove the Bluetooth cable from the cable channel as shown.

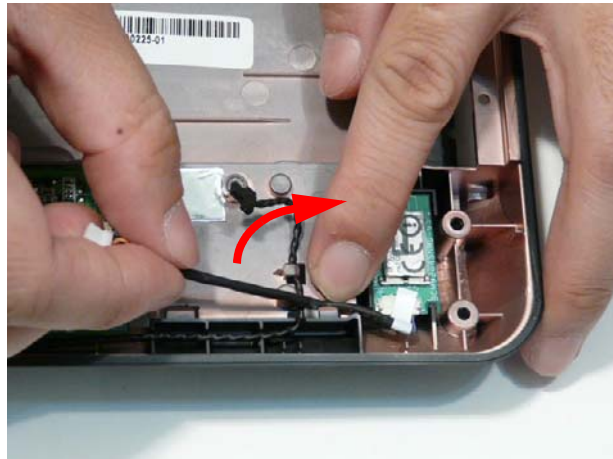

4. Lift the Bluetooth Module upward to disengage the adhesive holding the module in place.

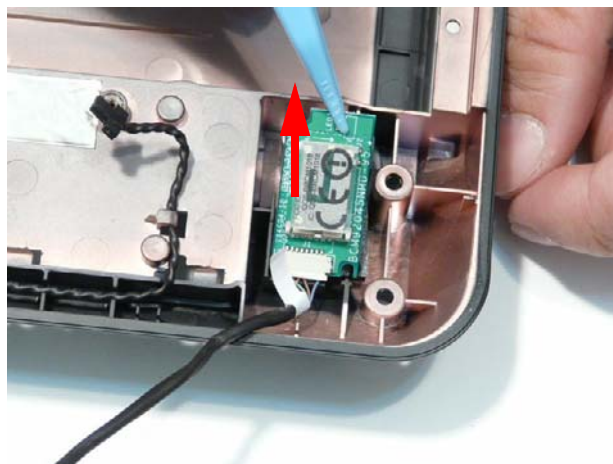


- 
5. Disconnect the Bluetooth cable from the module.

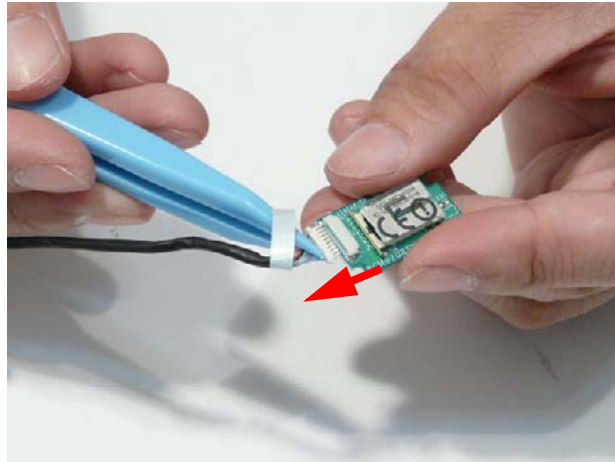


# Removing the USB Board

- 1. See “Removing the Upper Cover” on page 64.
- 2. Remove the single screws securing the USB Board to the Lower Cover.

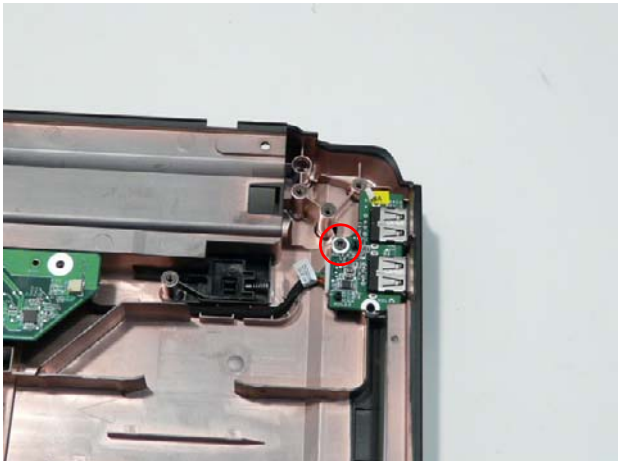


| Step      | Size | Quantity | Screw Type                                                                          |
|-----------|------|----------|-------------------------------------------------------------------------------------|
| USB Board | M2*3 | 1        |  |

- 3. Lift the USB Board clear of the Lower Cover.

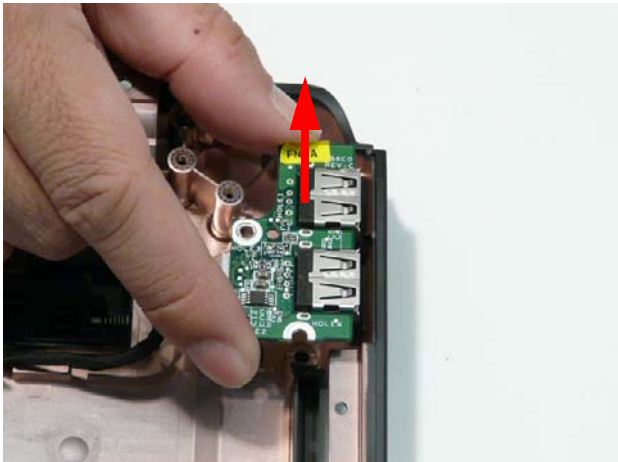


- 
4. Turn the USB Board over and disconnect the USB cable from the board.

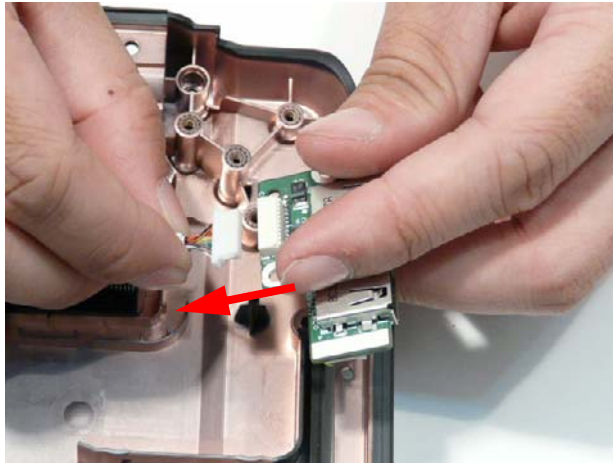


# Removing the Mainboard

- 1. See “Removing the LCD Module” on page 60.
- 2. See “Removing the Modem Board” on page 72.
- 3. See “Removing the Bluetooth Module” on page 74.
- 4. Remove the USB cable from the cable channel. Ensure that the cable is free from all cable clips.

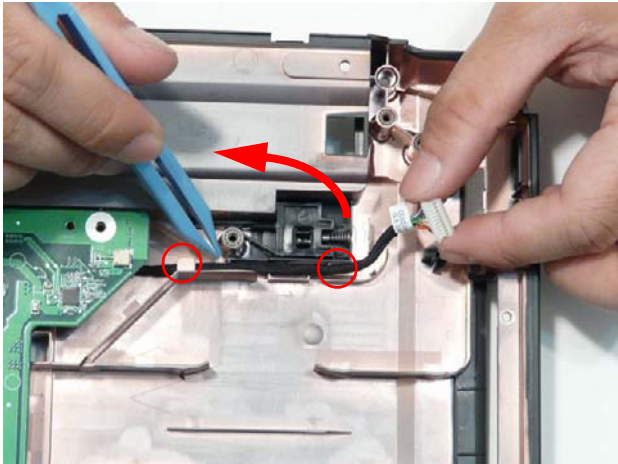

- 5. Remove the single screw securing the Mainboard to the Lower Cover.

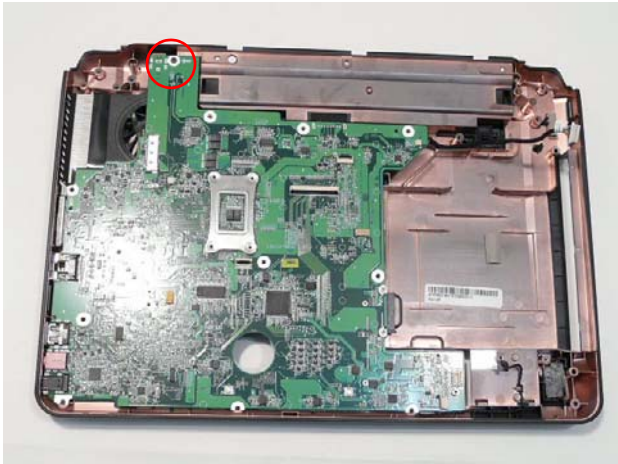


| Step      | Size     | Quantity | Screw Type                                                                            |
|-----------|----------|----------|---------------------------------------------------------------------------------------|
| Mainboard | M2.5*6.0 | 1        |  |

- 
6. Lift the Mainboard right side first as shown and remove it from the Lower Cover.



7. Disconnect the USB Board cable from the Mainboard as shown.

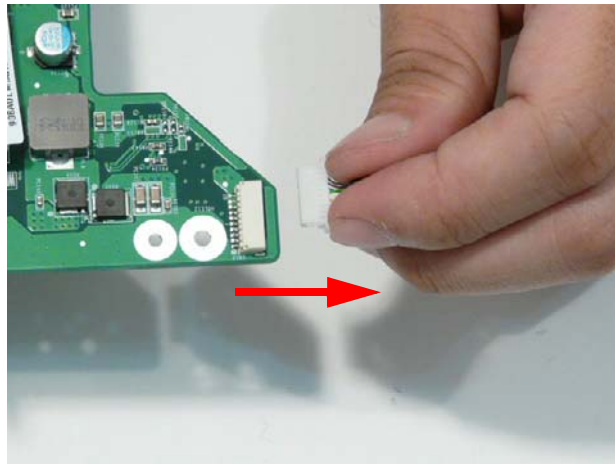


---


## Removing the RTC Battery

**IMPORTANT:** Follow local regulations for disposal of all batteries.

1. See “Removing the Upper Cover” on page 64.
2. Turn the Mainboard over and locate the RTC Battery.

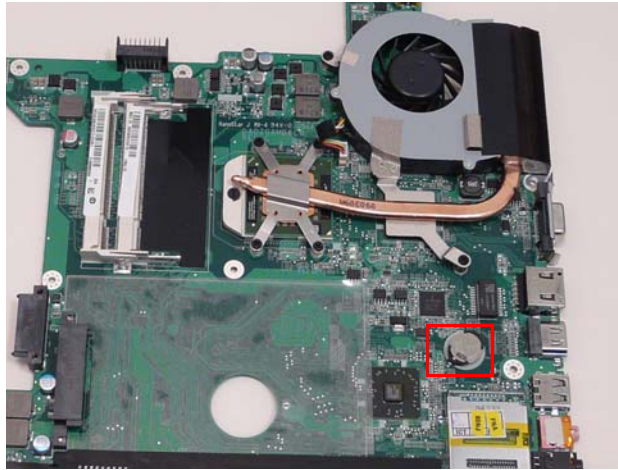

3. Carefully bend back the plastic arm using a pair of plastic tweezers. With your opposite hand, lift out the RTC battery.

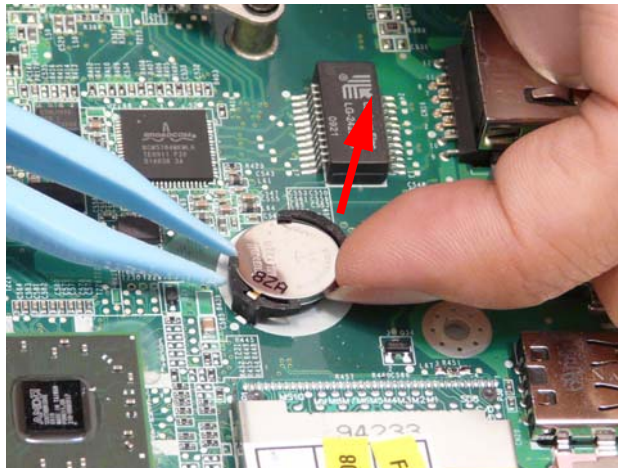


---


## Removing the Thermal Module

1. See “Removing the Mainboard” on page 78.
2. Turn the Mainboard CPU side up, and place it on a clean surface.
3. Loosen the five captive screws in the Thermal Module in numerical order from 5 to 1.


**NOTE:** The Thermal Module is secured with six screws on models with VGA support.

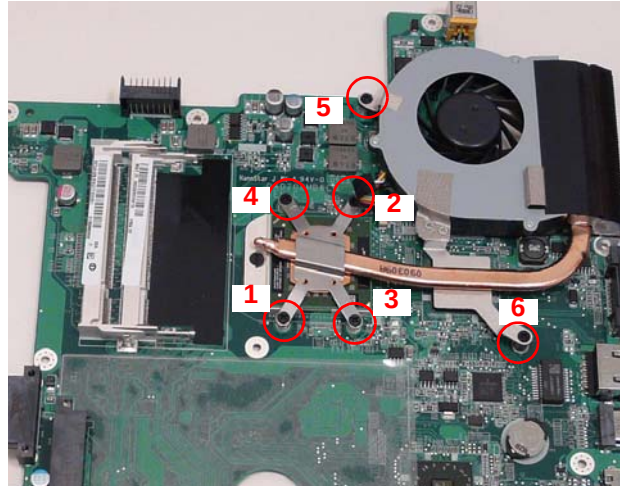

4. Disconnect the Fan power cable from the Mainboard.

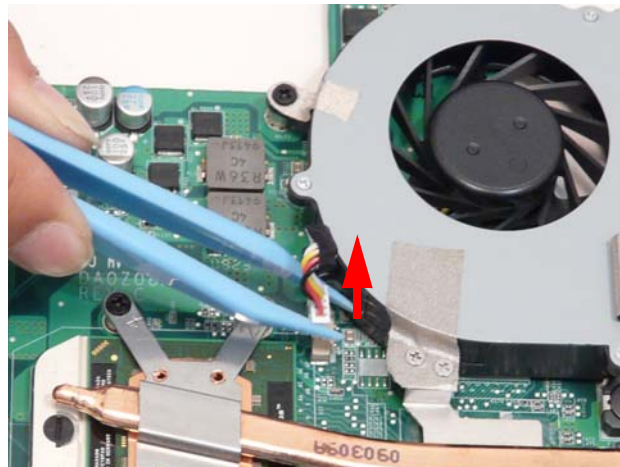


5. Lift the Thermal Module clear of the Mainboard.

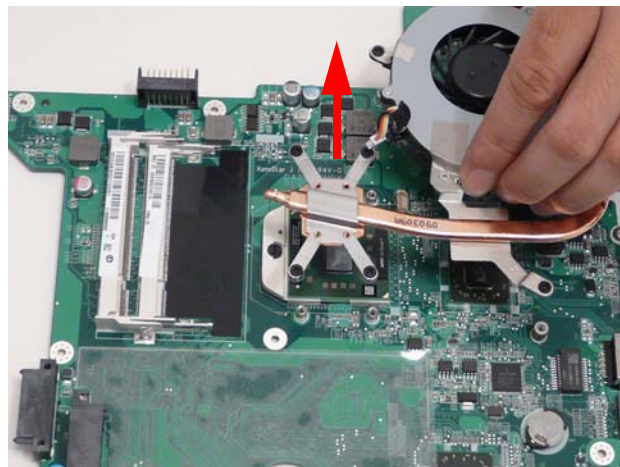


---

## Removing the CPU

1. See “Removing the Thermal Module” on page 81.
2. Using a flat bladed screw driver, rotate the CPU screw 180° to release the CPU from the socket.

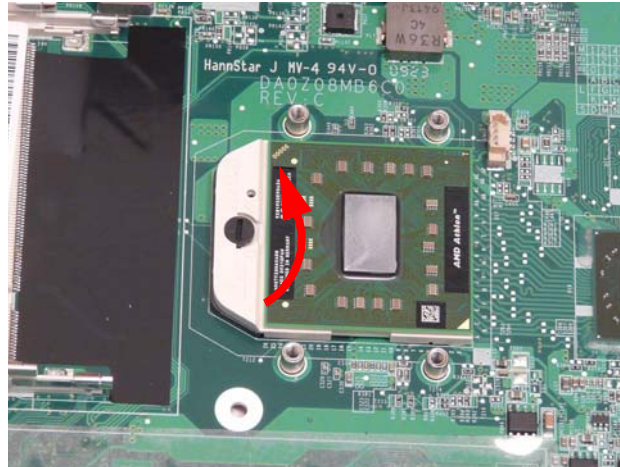


3. Lift the CPU clear of the socket.

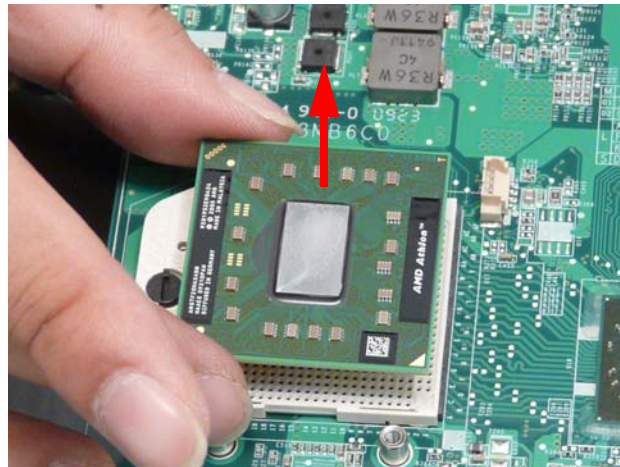

# LCD Module Disassembly Process

**IMPORTANT:** Cable paths and positioning may not represent the actual model. During the removal and replacement of components, ensure all available cable channels and clips are used and that the cables are replaced in the same position.

## LCD Module Disassembly Flowchart

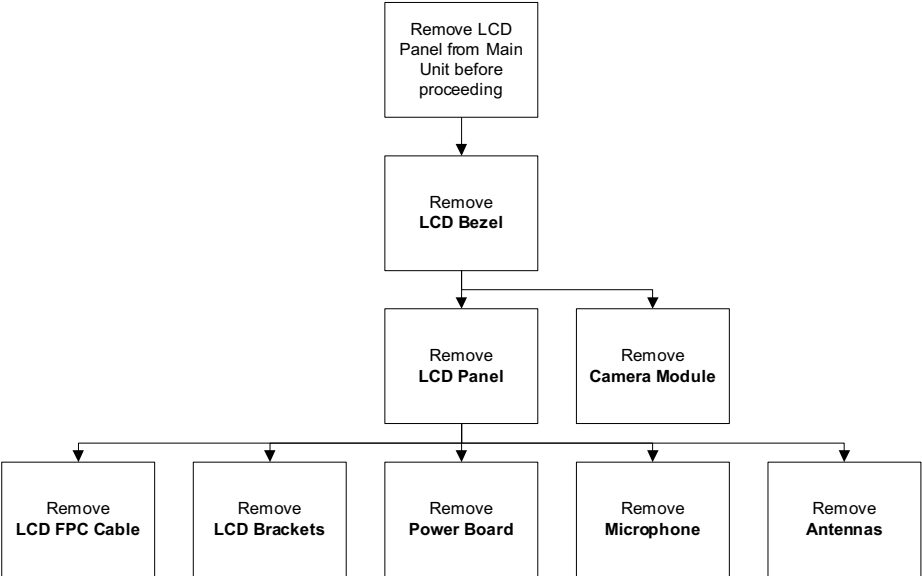


### Screw List

| Step         | Screw    | Quantity | Part No.     |
|--------------|----------|----------|--------------|
| LCD Bezel    | M2.5*6.0 | 6        | 86.W0907.002 |
|              | M2*3     | 2        | 86.A08V7.005 |
| LCD Panel    | M2*3.5   | 4        | 86.T23V7.005 |
| LCD Brackets | M2*3     | 4        | 86.A08V7.005 |


# Removing the LCD Bezel

- 1. See “Removing the LCD Module” on page 60.
- 2. Remove the six screw caps and screws from the LCD Bezel.

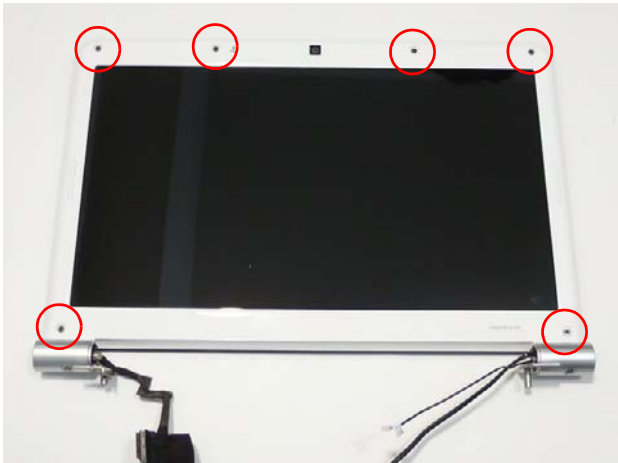


| Step      | Size     | Quantity | Screw Type                                                                          |
|-----------|----------|----------|-------------------------------------------------------------------------------------|
| LCD Bezel | M2.5*6.0 | 6        |  |

- 3. Remove the two securing screw from the hinges as shown.

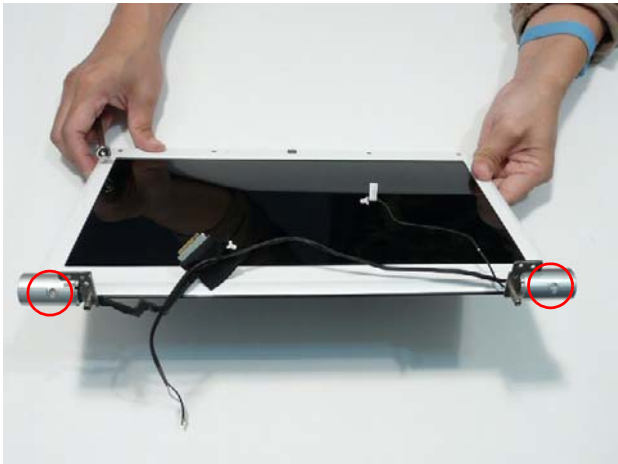

| Step      | Size | Quantity | Screw Type                                                                            |
|-----------|------|----------|---------------------------------------------------------------------------------------|
| LCD Bezel | M2*3 | 2        |  |

4. Starting from the inside top edge, pry the Bezel away from the panel. Continue moving down the sides until the Bezel is removed. If necessary, use a plastic pry to release the corners of the Bezel.

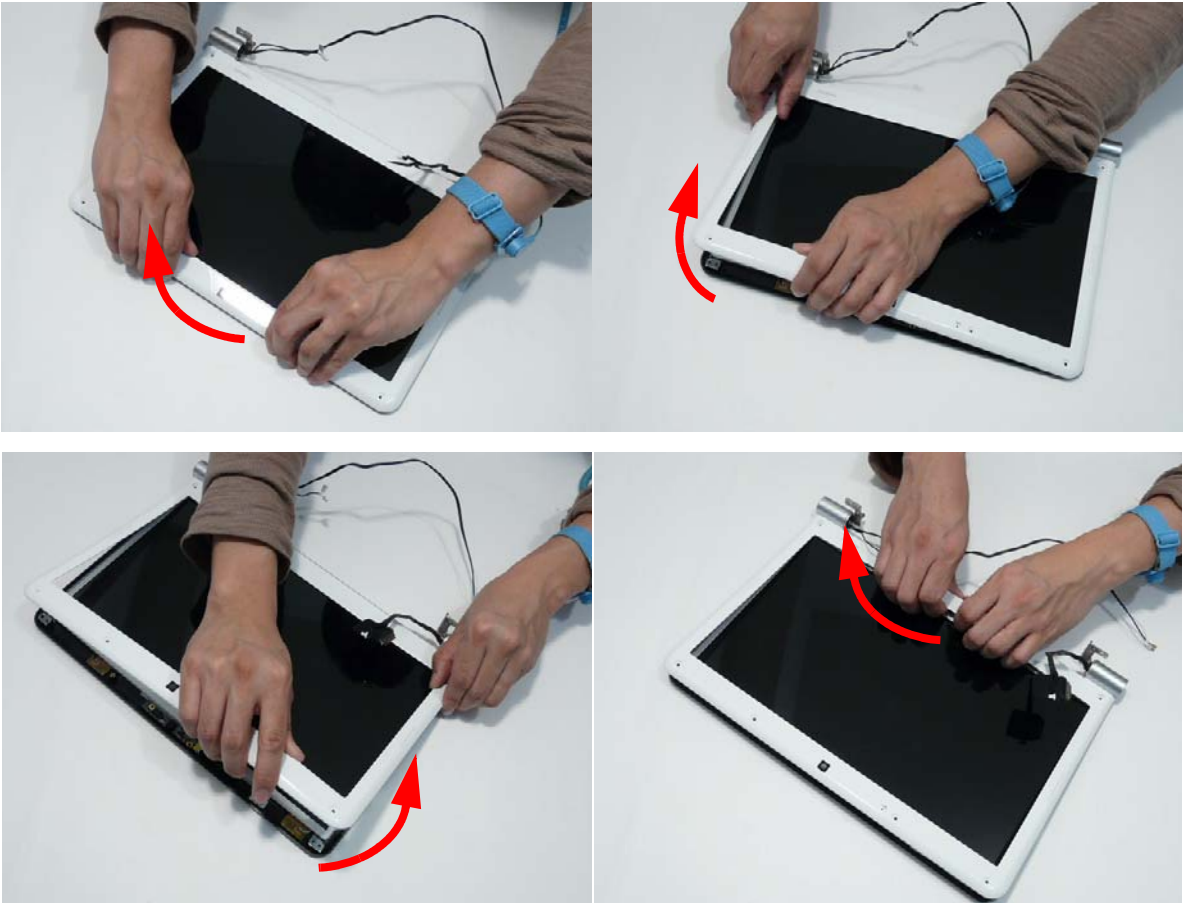


5. Lift up the Bezel and remove it from the LCD Module.




---

## Removing the Camera Board

1. See “Removing the LCD Bezel” on page 84.
2. Remove the Camera Board from the LCD Module.

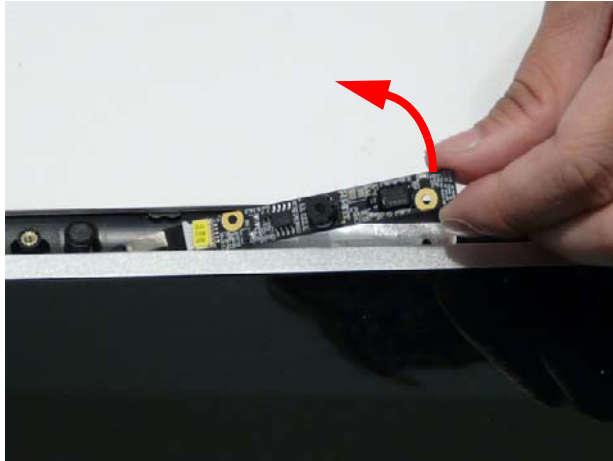

3. Disconnect the cable from the Camera Board as shown.

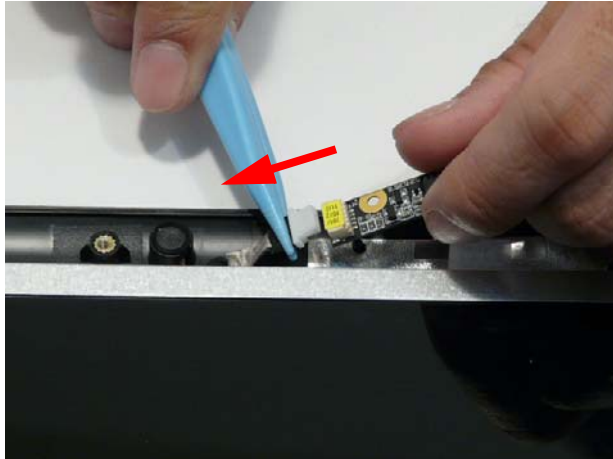


# Removing the LCD Panel

- 1. See “Removing the Camera Board” on page 86.
- 2. Remove the four securing screws from the LCD Panel.



| Step      | Size   | Quantity | Screw Type                                                                          |
|-----------|--------|----------|-------------------------------------------------------------------------------------|
| LCD Panel | M2*3.5 | 4        |  |

- 3. Disconnect the Microphone connector as shown.

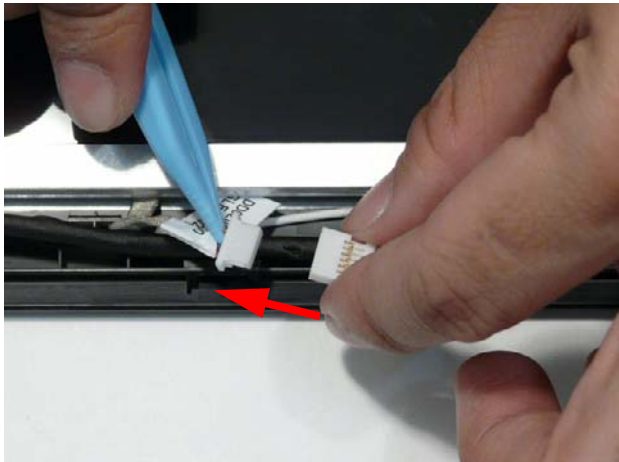


- 
4. Remove the LCD Panel rear edge first. Place it on a clean surface.




## Removing the LCD Brackets and FPC Cable

1. See “Removing the LCD Panel” on page 87.
2. Remove the four securing screws (two each side) from the LCD Panel brackets.

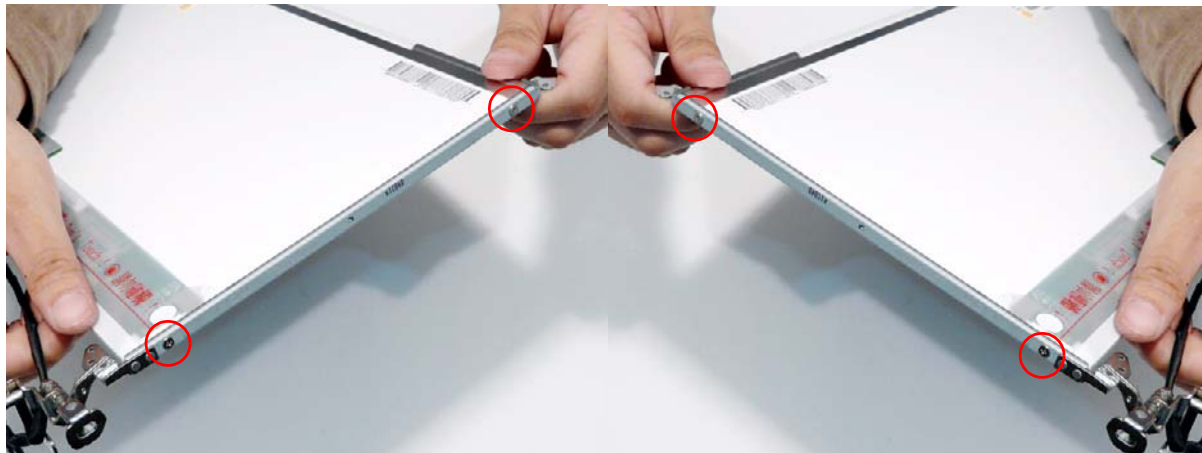

| Step         | Size | Quantity | Screw Type                                                                          |
|--------------|------|----------|-------------------------------------------------------------------------------------|
| LCD Brackets | M2*3 | 4        |  |

3. Remove the brackets from the LCD Panel.

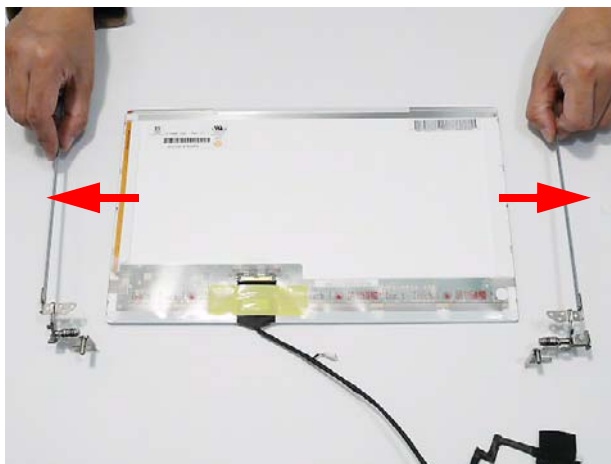

- 
4. Carefully lift the adhesive tape protecting the cable connector.



5. Carefully lift the adhesive tape securing the cable to the panel.




6. Disconnect the cable from the LCD panel as shown.




---

## Removing the Power Board

1. See “Removing the LCD Panel” on page 87.
2. Lift the Power Board from the right LCD Hinge as shown.

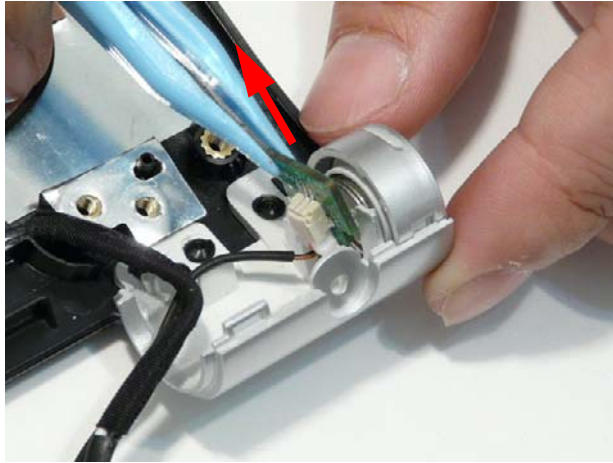


3. Disconnect the cable from the Power Board connector.

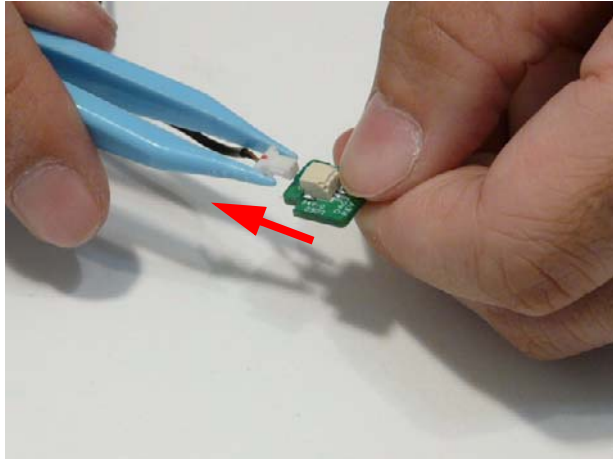

---

## Removing the Microphone Module


1. See “Removing the LCD Bezel” on page 84.
2. Lift the Microphone cable to detach the adhesive securing it in place.

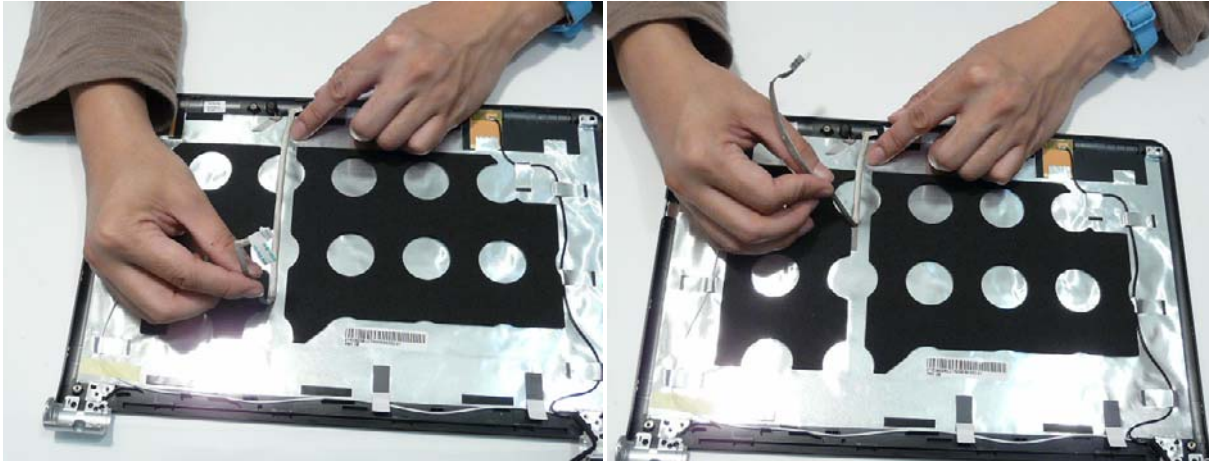

3. Lift the adhesive strip securing the Microphone Module to the LCD Module.




4. Remove the Microphone from the LCD Module.

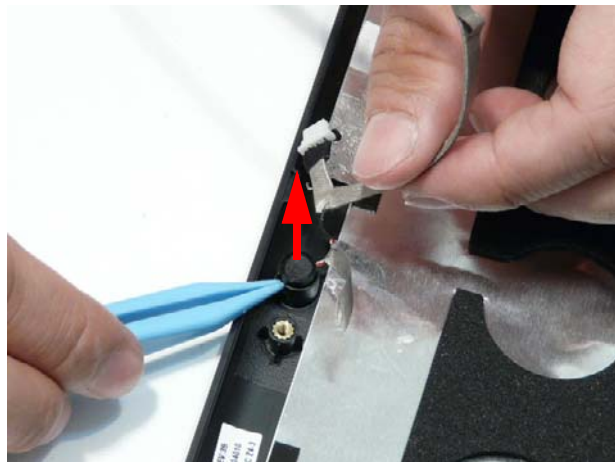

---


## Removing the Antennas

1. See “Removing the LCD Panel” on page 87.
2. Lift all the adhesive tabs securing the left and right Antenna cables in place.

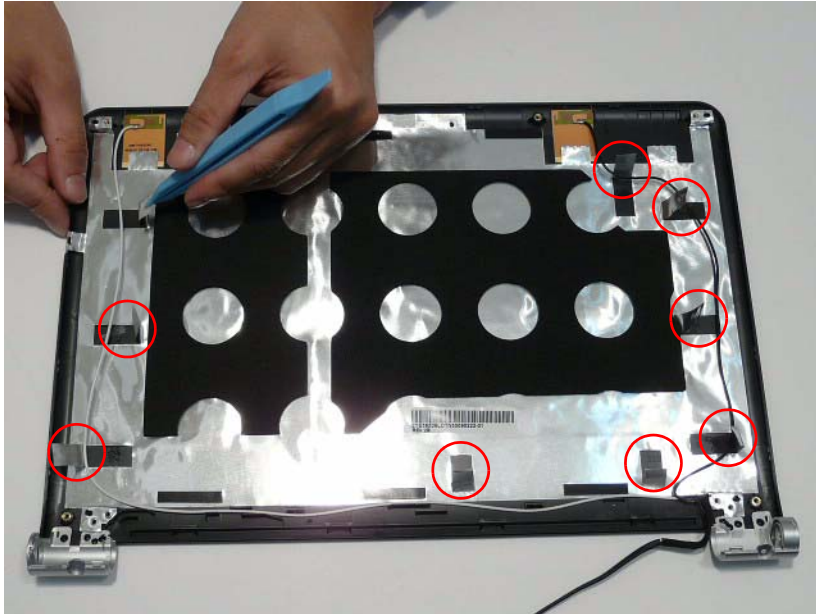


3. Lift the adhesive pad securing the left Antenna pad to the module. Carefully pry up the Antenna pad, as shown, and remove the pad from the LCD Module.

**IMPORTANT:** A strong adhesive is used to secure the Antenna pad in place. Take care not to bend the pad during removal.

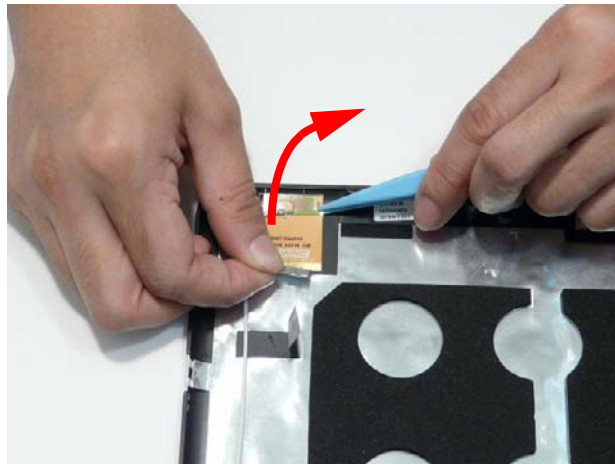

- 
4. Lift the adhesive pad securing the right Antenna pad to the module. Carefully pry up the Antenna pad, as shown, and remove the pad from the LCD Module.

**IMPORTANT:** A strong adhesive is used to secure the Antenna pad in place. Take care not to bend the pad during removal.


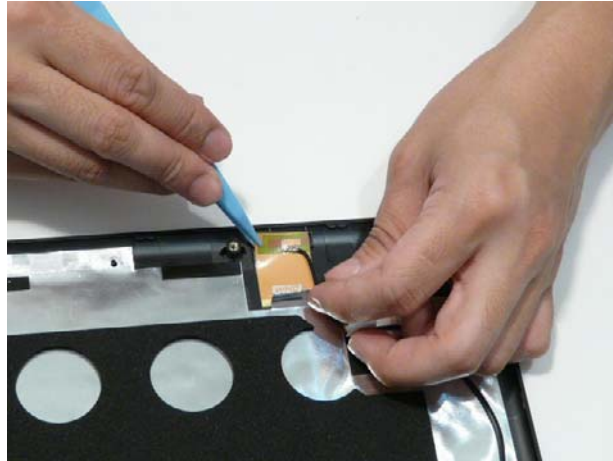


---


# LCD Module Reassembly Procedure

## Replacing the Antennas

1. Replace the WLAN Antenna cable as shown, using all available cable clips.
2. Replace the adhesive tape to secure the WLAN cable in place.

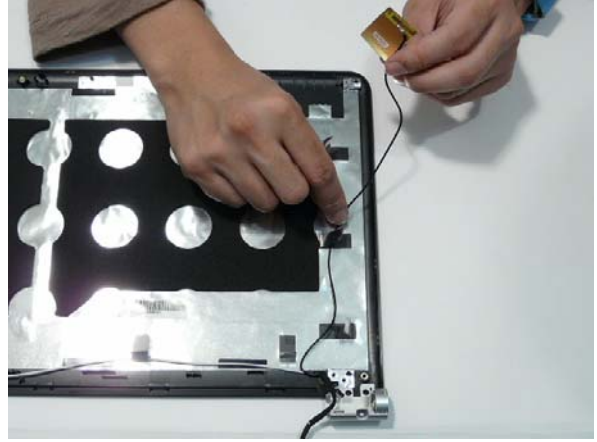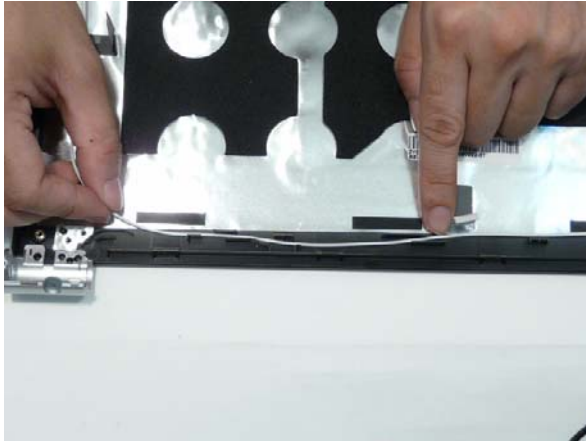

3. Replace the adhesive tape securing the WLAN Antenna pad.

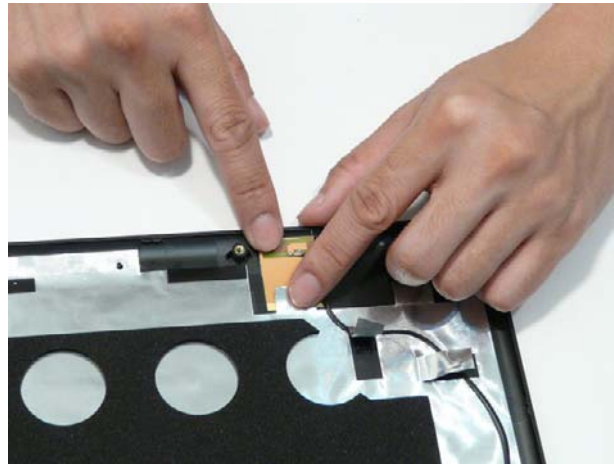


4. Repeat the procedure for the other antenna cable and pad.

- 
5. The LCD Module appears as follows when the WLAN Antennas are correctly installed.



## Replacing the Microphone Board


1. Place the Microphone in the LCD Module and press down to secure it in place.
2. Adhere the microphone cable to the back of the LCD panel as shown below.

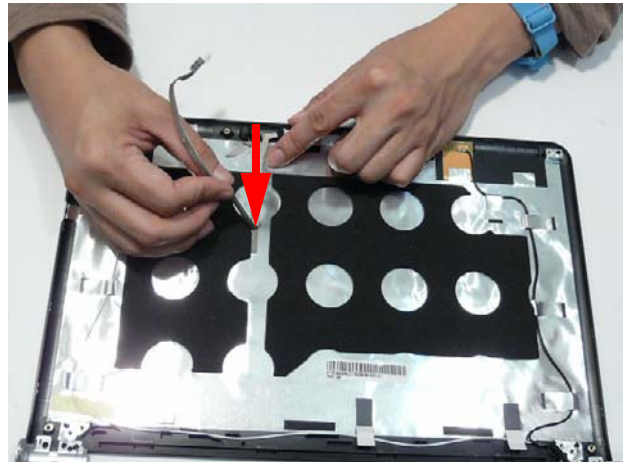


---

## Replacing the Power Board

3. Connect the cable to the Power Board connector.

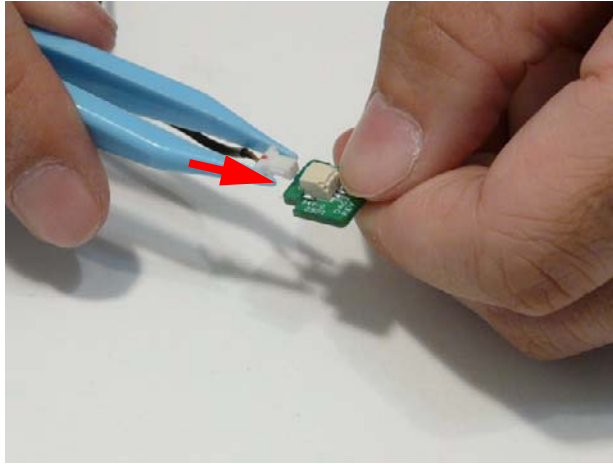


4. Insert the Power Board into the right LCD Hinge as shown.

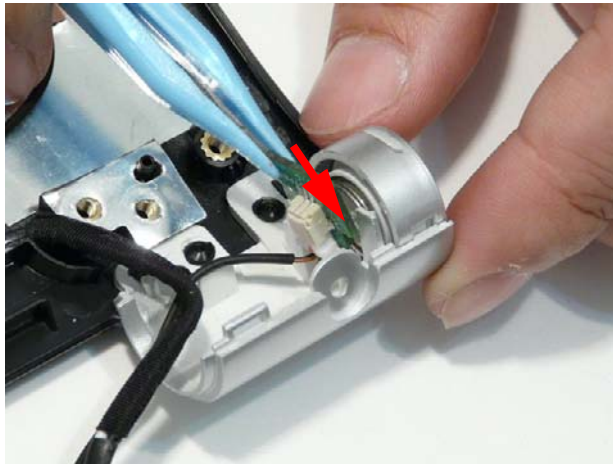


# Replacing the LCD Brackets and FPC Cable

| Step         | Size | Quantity | Screw Type                                                                          |
|--------------|------|----------|-------------------------------------------------------------------------------------|
| LCD Brackets | M2*3 | 4        |  |

1. Insert the LCD Cable into the panel connector as shown.
2. Secure the connector by replacing the adhesive strip as shown.

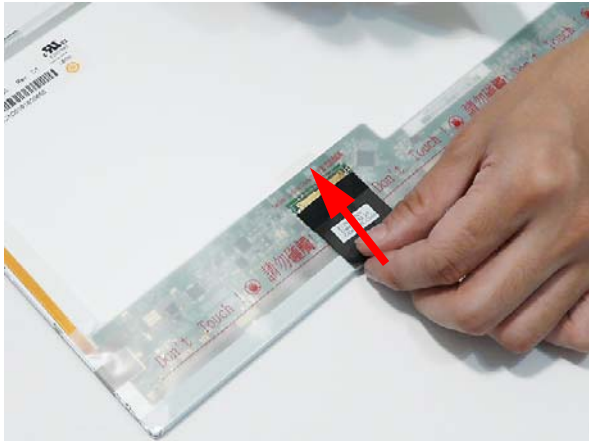


3. Replace the adhesive protection strip as shown.

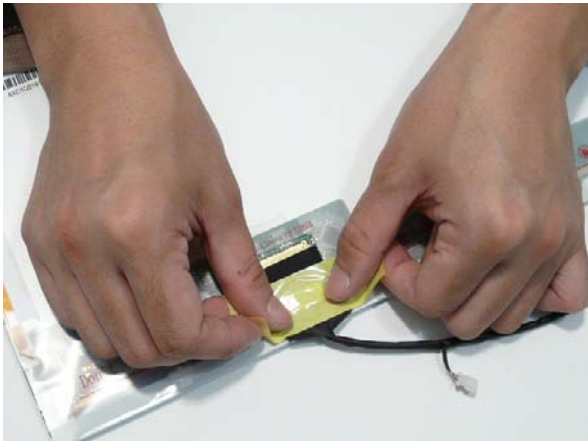


**IMPORTANT:**Ensure that the LCD Cable runs in front of the brackets to avoid trapping when the Bezel is replaced.

- 
4. Align the screw holes and replace the left and right LCD brackets as shown.

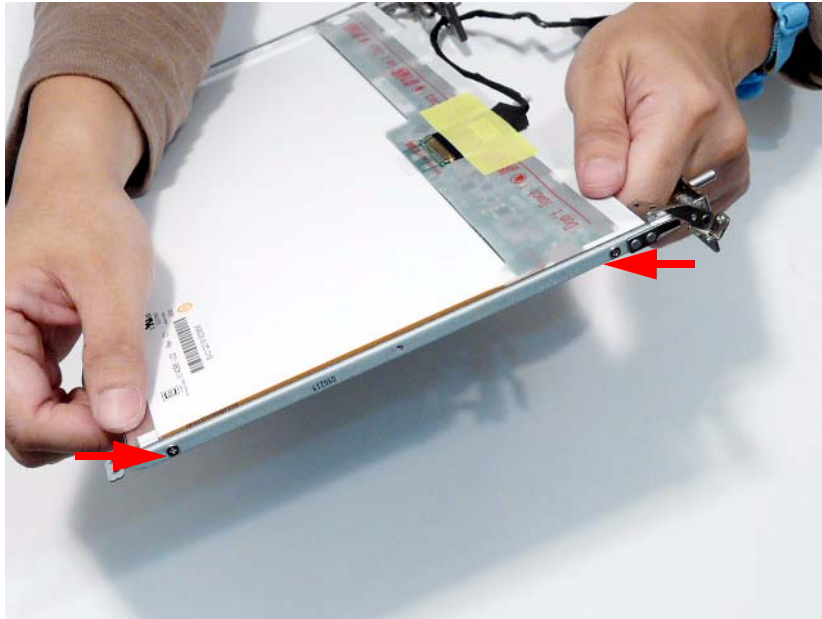

5. Secure the brackets to the panel using four bracket screws (two each side).

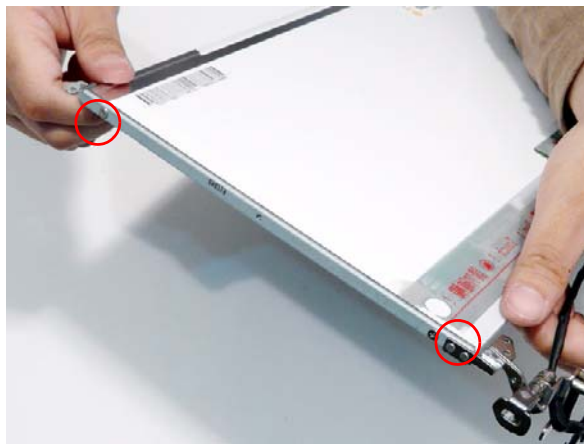


---

## Replacing the LCD Panel


1. Insert the LCD Panel rear edge first.



2. Ensure that the WLAN and FPC cables pass through the guide wells as shown and that screw holes are aligned properly.

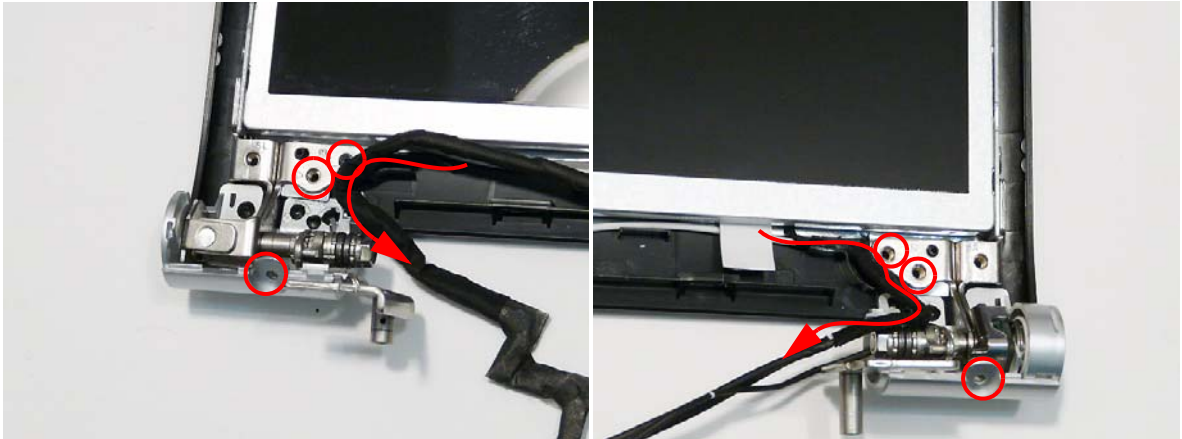

3. Connect the Microphone connector to the FPC cable as shown.

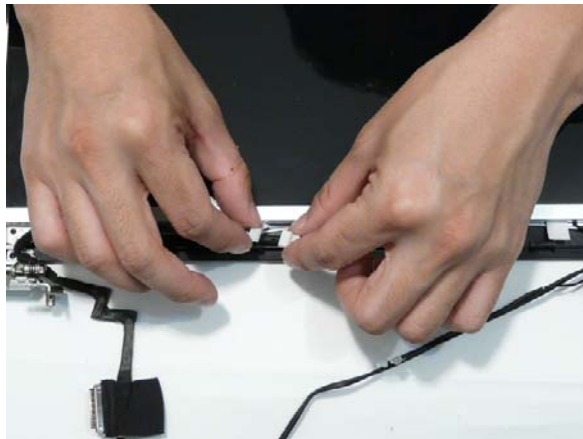



4. Replace the four securing screws for the LCD Panel.



| Step      | Size   | Quantity | Screw Type                                                                          |
|-----------|--------|----------|-------------------------------------------------------------------------------------|
| LCD Panel | M2.5*3 | 4        |  |

## Replacing the Camera Board

1. Connect the Camera cable as shown.
2. Ensure that the locating pins are correctly positioned and place the Camera Board in the LCD Module. Press down to secure it in place

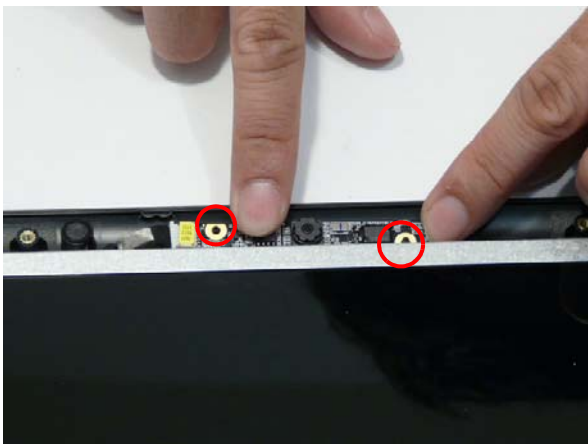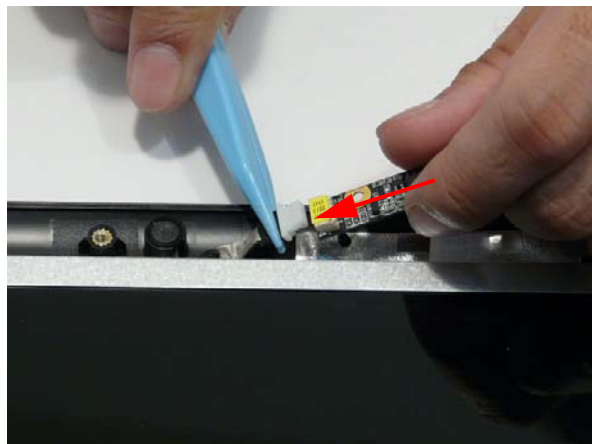

---

## Replacing the LCD Bezel


1. Place the Bezel onto the LCD Module starting with the bottom edge. Take care to ensure that the cables are exiting the hinge and are not being pinched by the bezel.



2. Starting from the bottom edge and working up to the top corners, press the Bezel into the panel.




3. Replace the two securing screws for the hinges as shown.

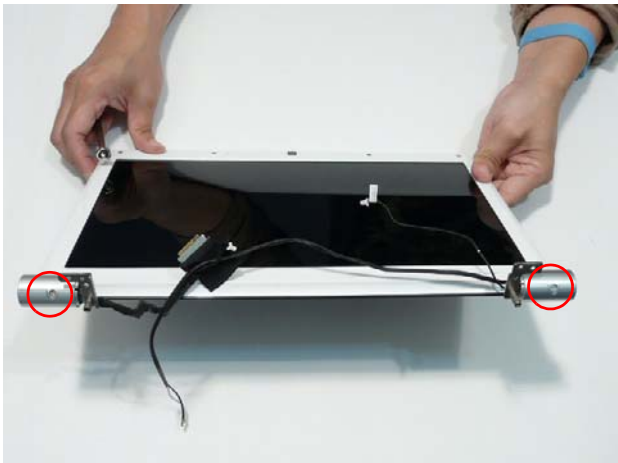

| Step      | Size | Quantity | Screw Type                                                                          |
|-----------|------|----------|-------------------------------------------------------------------------------------|
| LCD Bezel | M2*3 | 2        |  |

4. Replace the six screws and screw caps for the LCD Bezel.

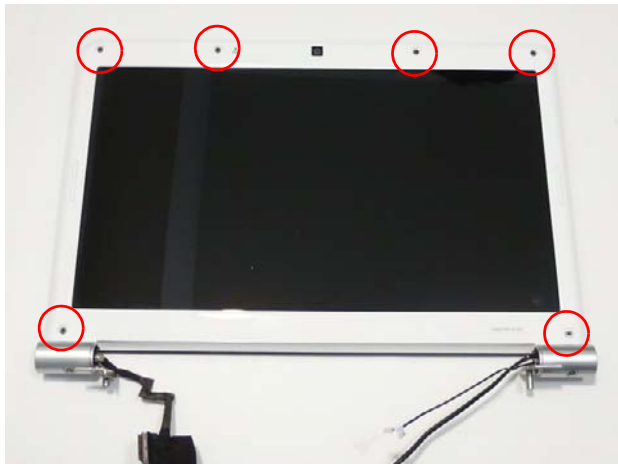


| Step      | Size     | Quantity | Screw Type                                                                            |
|-----------|----------|----------|---------------------------------------------------------------------------------------|
| LCD Bezel | M2.5*6.0 | 6        |  |

---

# Main Unit Reassembly Procedure

## Replacing the CPU

1. Insert the CPU into the socket. Be sure to align the pins correctly.

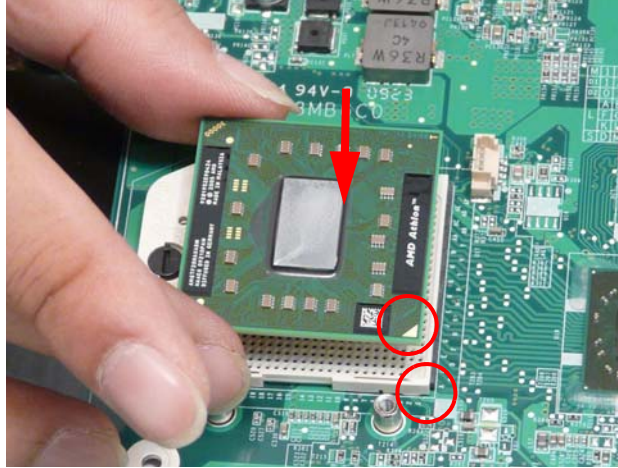

2. Using a flat bladed screw driver, rotate the CPU screw 180° to lock the CPU into the socket.



---

## Replacing the Thermal Module


**IMPORTANT:** Ensure all heat pads are in place before replacing the Thermal Module.

The following thermal pads are approved for use:


- Silmore GP50
- Honeywell
- Jet Motor 7762

The following thermal pads are approved for use:


- Eapus XR-PE
1. Remove all traces of thermal grease from the CPU using a lint-free cloth or cotton swab and Isopropyl Alcohol, Acetone, or other approved cleaning agent.
  2. Apply a small amount of thermal grease to the centre of the CPU—there is no need to spread the grease manually, the force used during the installation of the Thermal Module is sufficient.
  3. Place the Thermal Module on the Mainboard as shown.

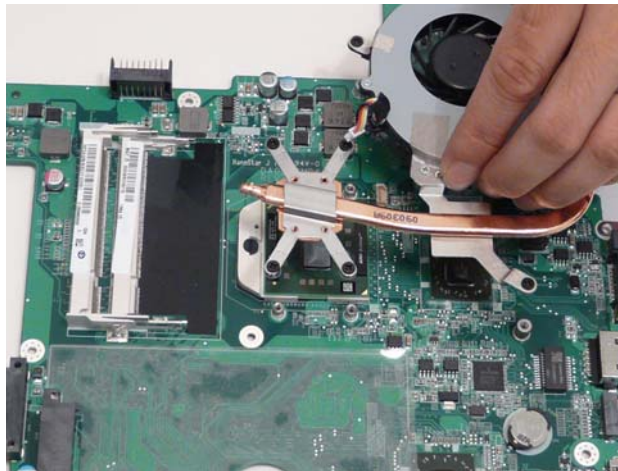

4. Connect the Fan power cable to the Mainboard.

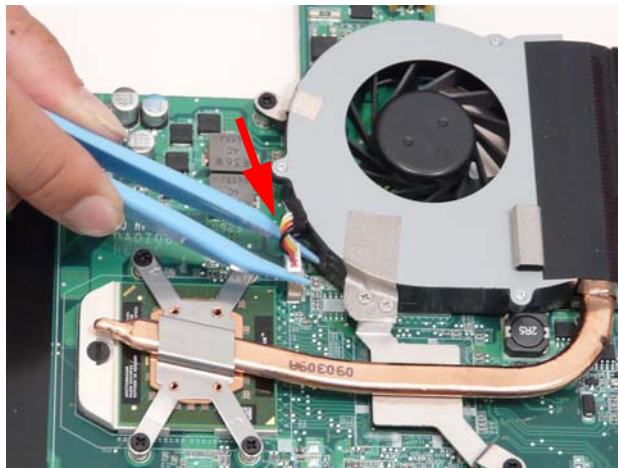

5. Insert and tighten the five captive screws in the Thermal Module in numerical order from 1 to 5.
- NOTE:** The Thermal Module is secured with six screws on models with VGA support.

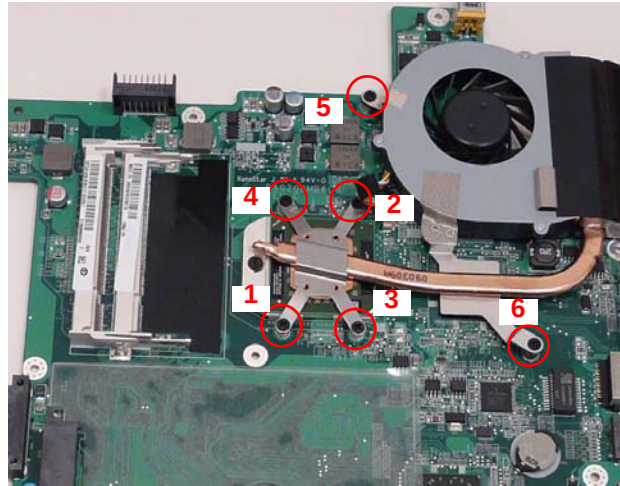


## Replacing the RTC Battery

1. Locate the defective RTC battery. The Mainboard must be removed from the Lower Cover to access the battery.




2. Insert the replacement battery into the Mainboard socket.

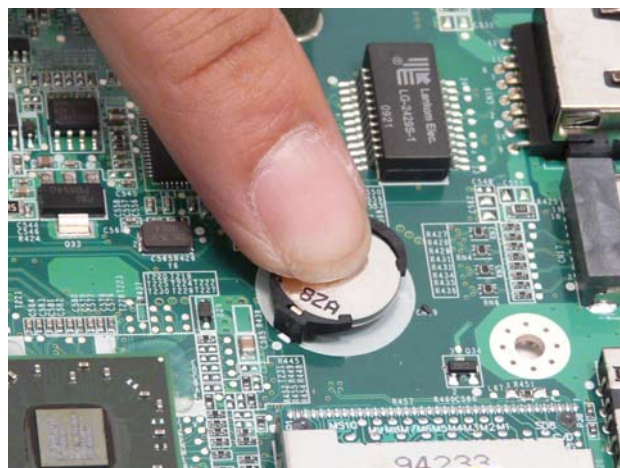


# Replacing the Mainboard

- 1. Insert the Mainboard right side first as shown and insert it into the Lower Cover, making sure to properly align the screw holes.

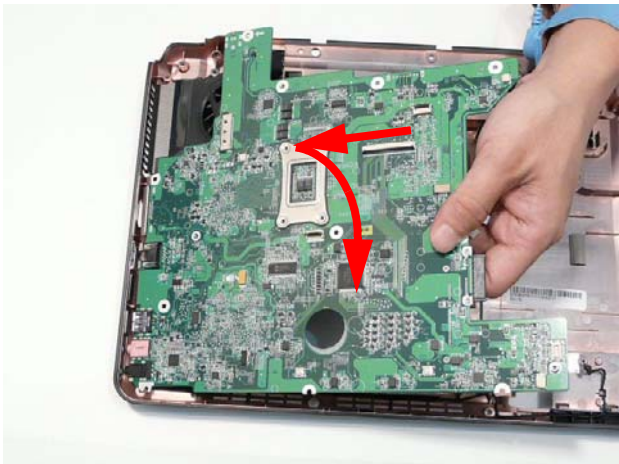

- 2. Insert the single screw to secure the Mainboard to the Lower Cover.

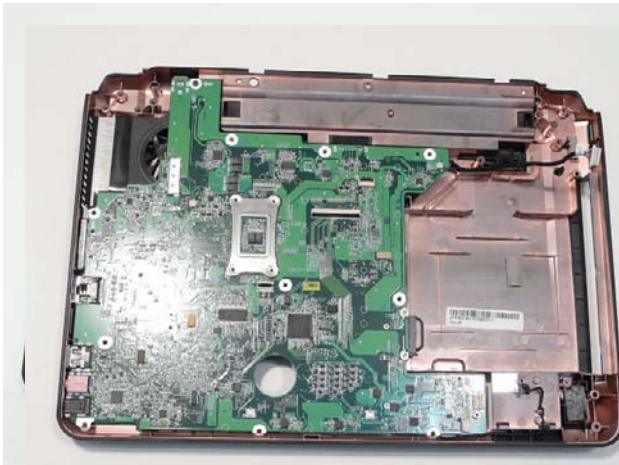


| Step      | Size     | Quantity | Screw Type                                                                            |
|-----------|----------|----------|---------------------------------------------------------------------------------------|
| Mainboard | M2.5*6.0 | 1        |  |


---

## Replacing the USB Board


1. Connect the USB Board cable to the Mainboard as shown.

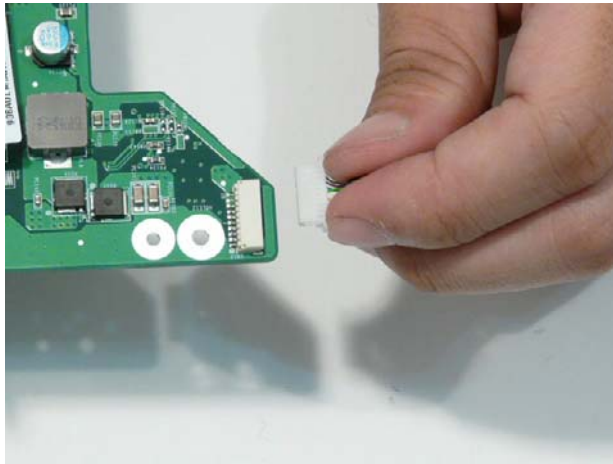


2. Insert the USB cable into the cable channel.

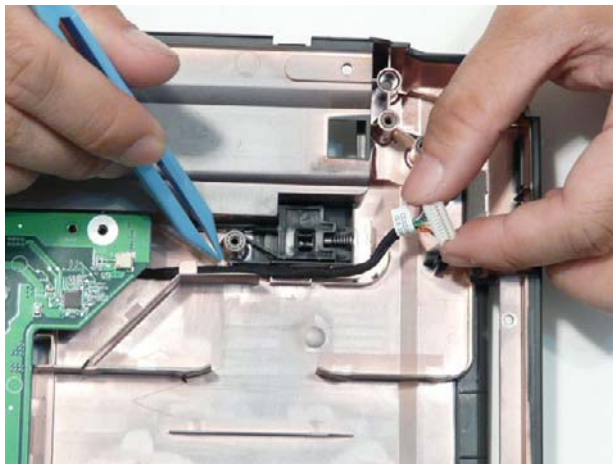


3. Connect the USB cable to the board.

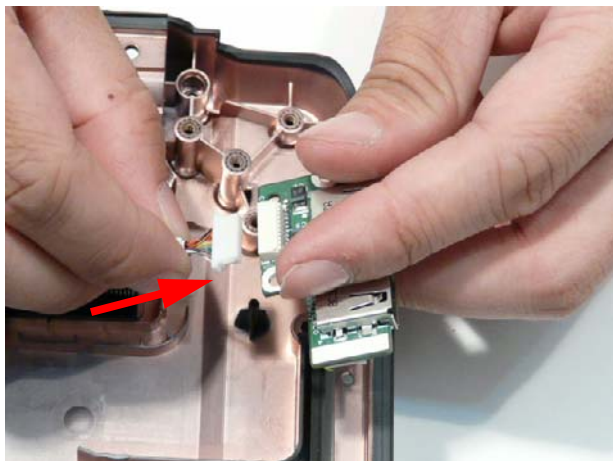

4. Turn the USB board over and place into the Lower Cover

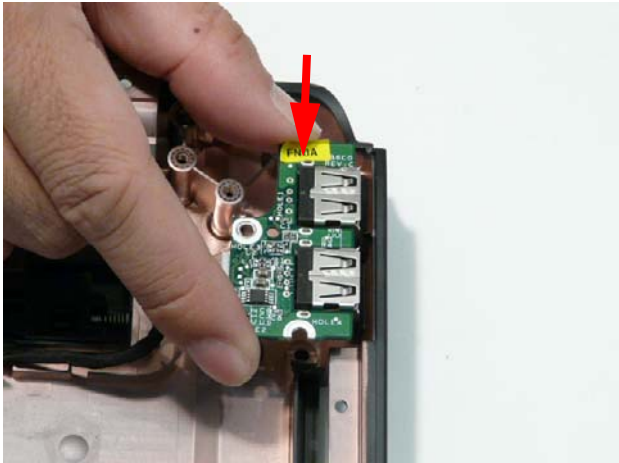

5. Insert the single screw to secure the USB Board to the Lower Cover.

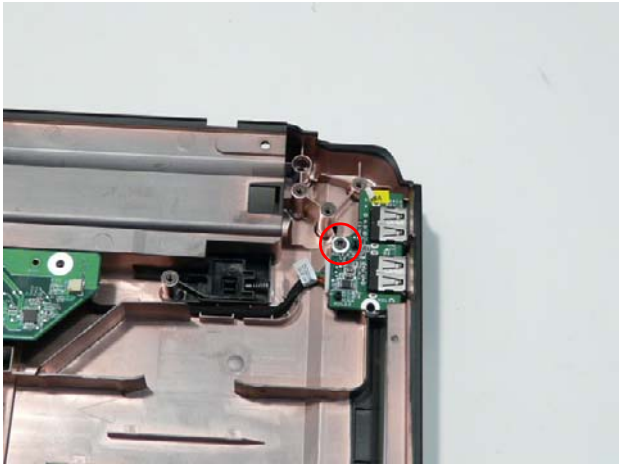


| Step      | Size | Quantity | Screw Type                                                                            |
|-----------|------|----------|---------------------------------------------------------------------------------------|
| USB Board | M2*3 | 1        |  |


---

## Replacing the Bluetooth Module


1. Connect the Bluetooth cable to the module.

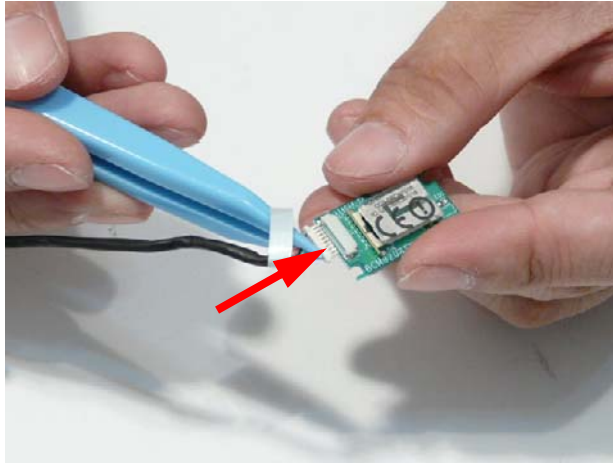


2. Replace the adhesive in the lower cover if necessary.
3. Place the Bluetooth Module in the lower cover as shown and press against the adhesive to secure the module in place.

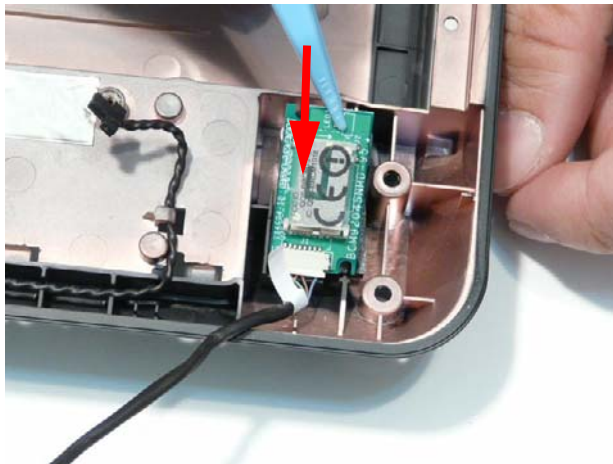

4. Insert the Bluetooth cable into the cable channel as shown.

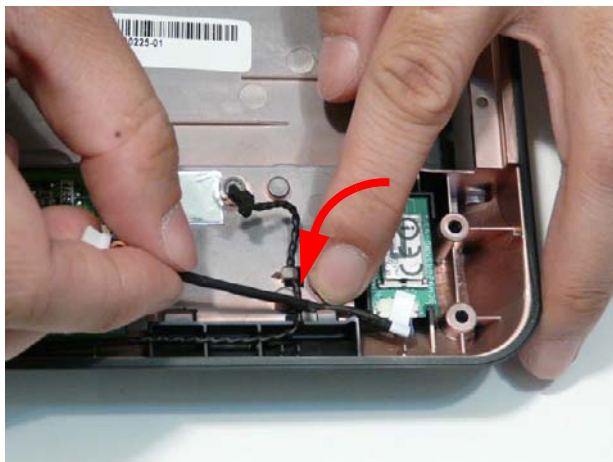


5. Connect the Bluetooth cable to the Mainboard.

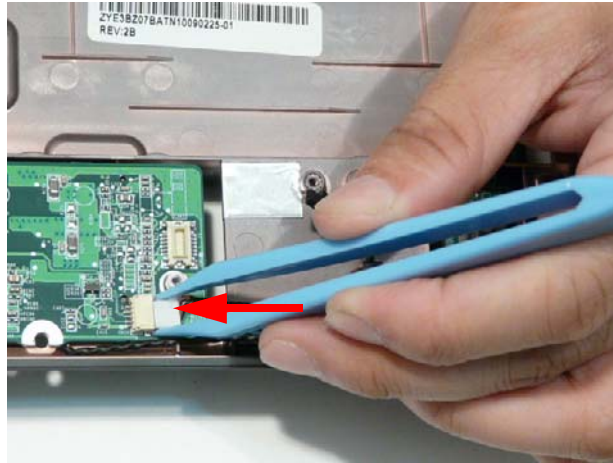


## Replacing the Modem Board


1. Connect the Modem cable as shown.

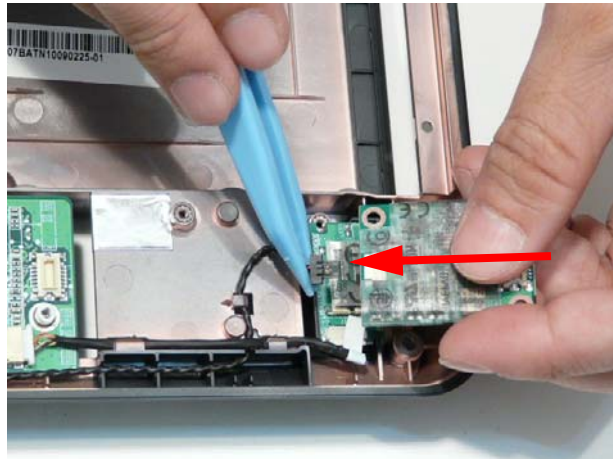

2. Flip the Modem Board over and set into the Lower Cover.

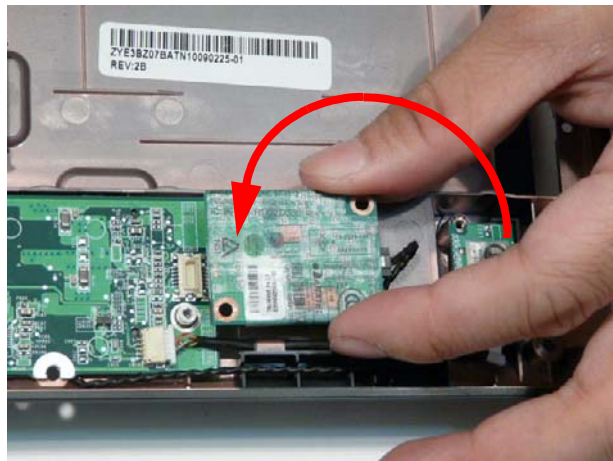

3. Secure the modem board in place using two screws.

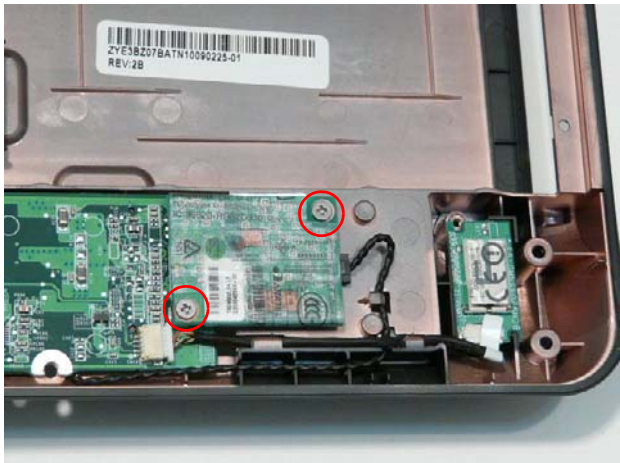


| Step        | Size | Quantity | Screw Type                                                                          |
|-------------|------|----------|-------------------------------------------------------------------------------------|
| Modem Board | M2*3 | 2        |  |


## Replacing the TouchPad FFC

**IMPORTANT:**It is not possible to remove the TouchPad individually. If the TouchPad malfunctions, follow the disassembly steps to remove any additional components on the Upper Cover and replace the entire Upper Cover.

1. Carefully insert the FFC through the Upper Cover as shown.

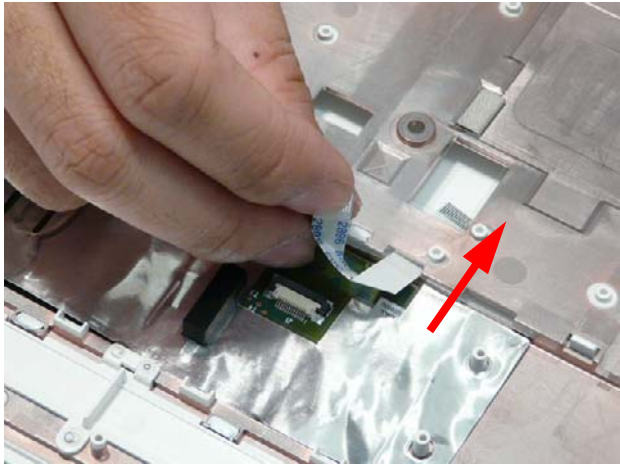


2. Connect the FFC as shown and close the TouchPad FFC locking latch.

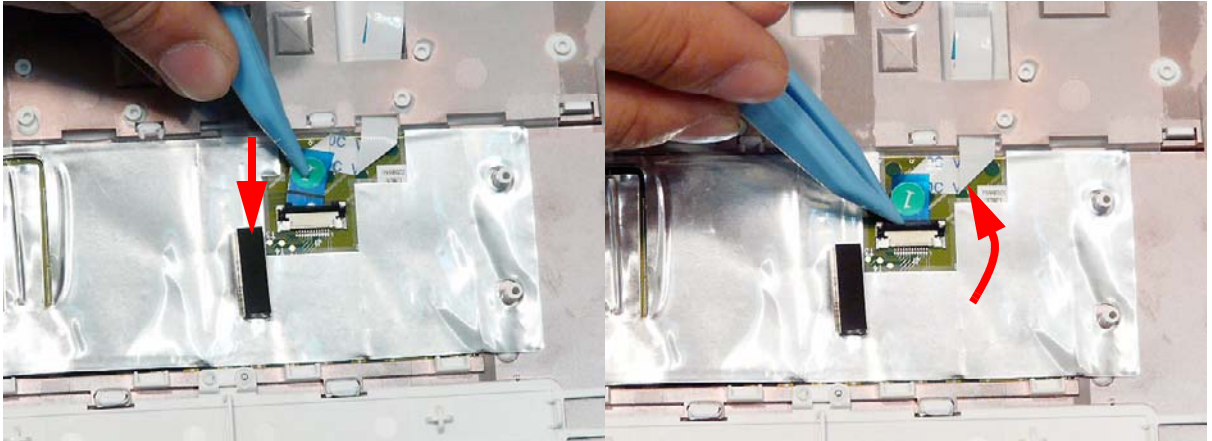



## Replacing the Speaker Modules

**IMPORTANT:** Follow the instructions in “Removing the Upper Cover” on page 64 to access the speaker modules.

1. Place the Speakers on the underside of the Upper Cover, taking care to align the mounting screws.

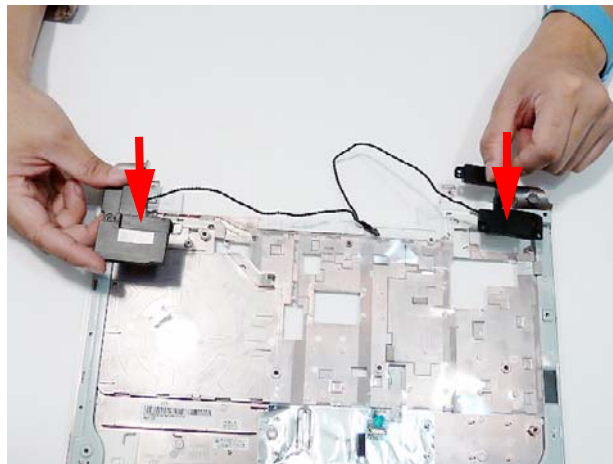


2. Replace the four securing screws for the Speaker Modules.

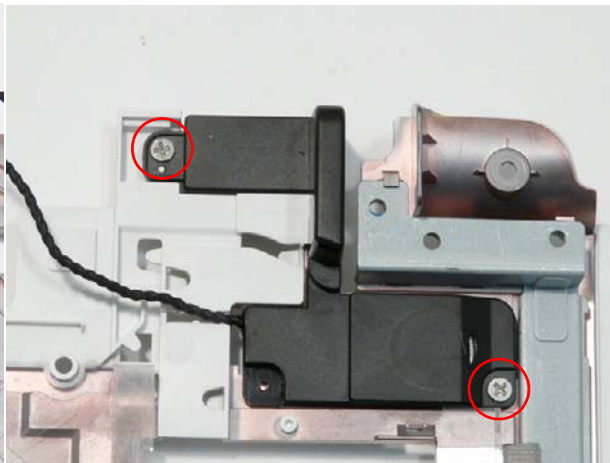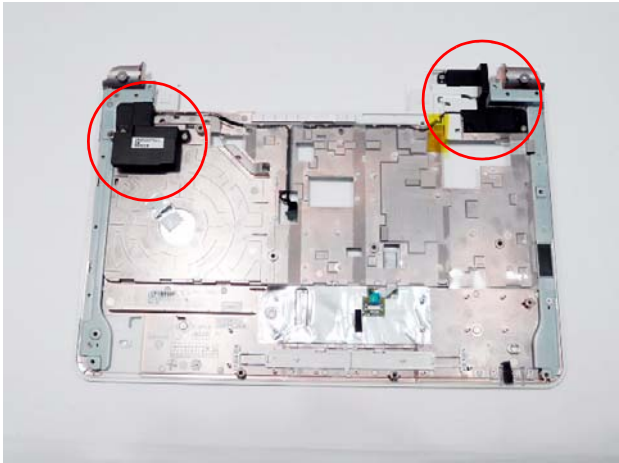


| Step            | Size | Quantity | Screw Type                                                                            |
|-----------------|------|----------|---------------------------------------------------------------------------------------|
| Speaker Modules | M2*3 | 4        |  |


- 
3. Insert the left speaker cable into the left side cable channel.

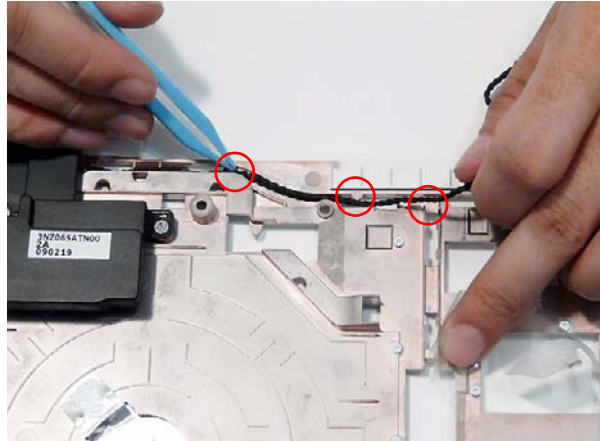


4. Insert the right speaker cable into the right side cable channel.

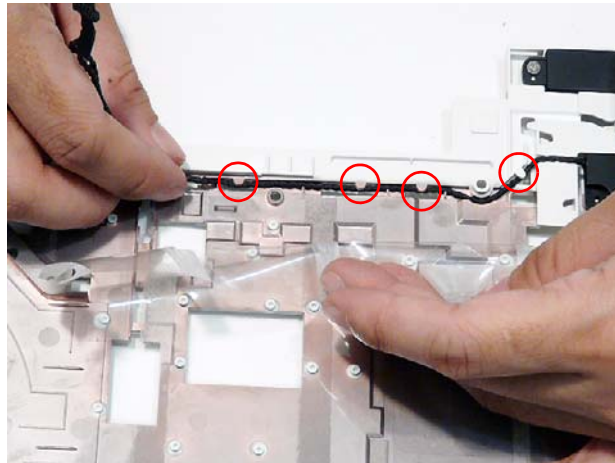

5. Insert the Speaker cables into the center cable channel.

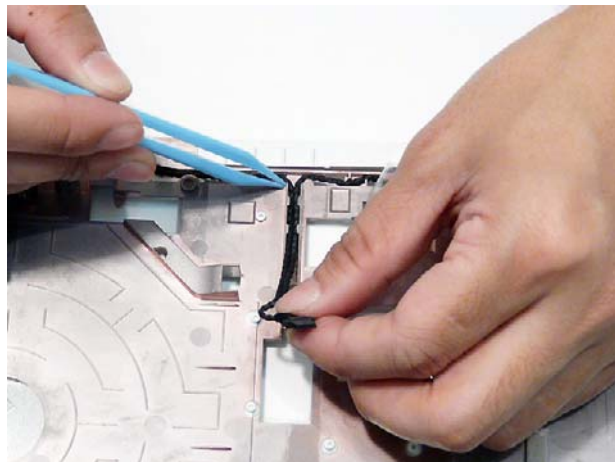

- 
6. Replace the plastic covering on the Upper Cover.

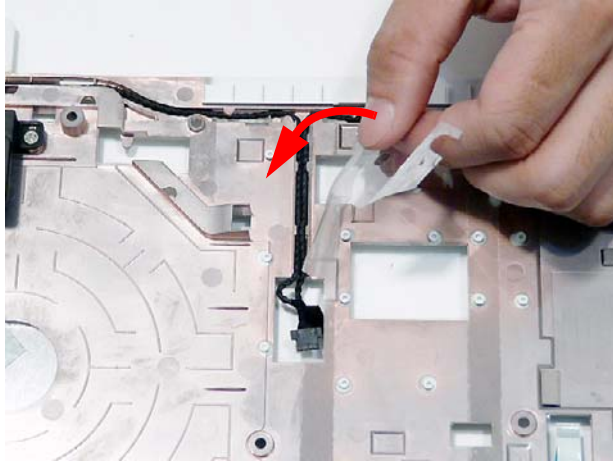


## Replacing the Upper Cover

1. Place the Upper Cover onto the Lower Cover assembly as shown.



2. Replace the nine screws to secure the Upper Cover.

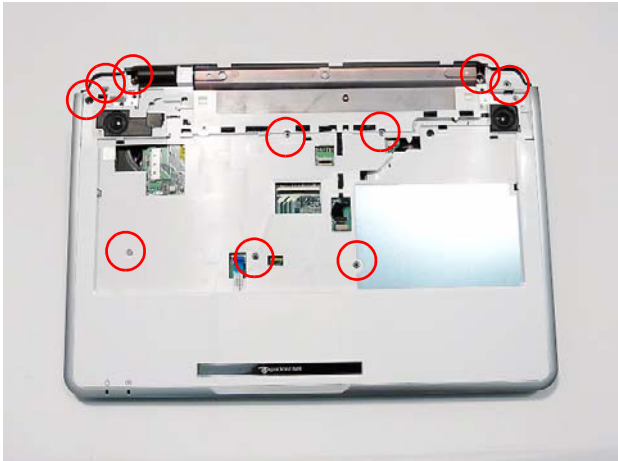


| Step        | Size     | Quantity | Screw Type                                                                          |
|-------------|----------|----------|-------------------------------------------------------------------------------------|
| Upper Cover | M2.5*6.0 | 10       |  |


3. Reconnect the following cables to the Mainboard.




4. Open the FFC securing latch and connect A as shown.

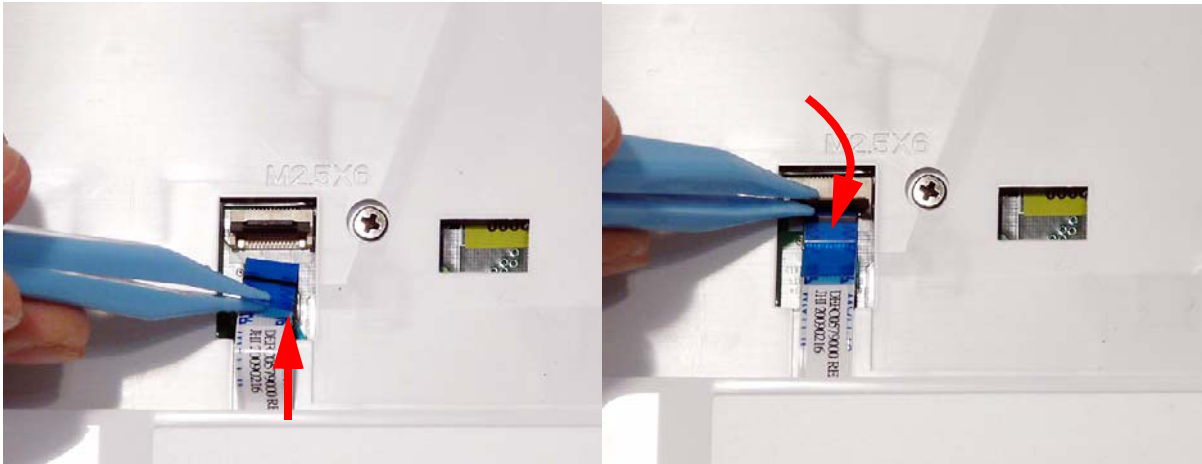

5. Connect B as shown.

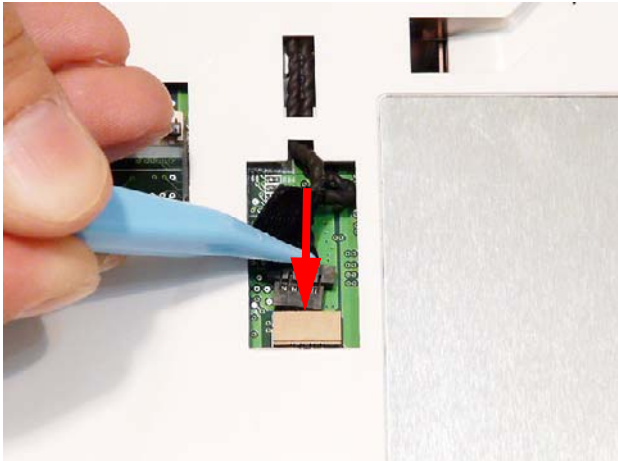


6. Turn the computer over. Replace the eight securing screws.

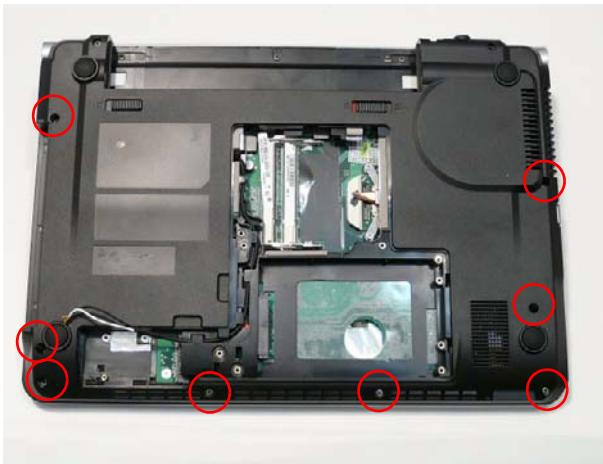

| Step        | Size     | Quantity | Screw Type                                                                            |
|-------------|----------|----------|---------------------------------------------------------------------------------------|
| Upper Cover | M2.5*6.0 | 8        |  |

# Replacing the LCD Module

- 1. Insert the module into the Main Unit, taking care to align the mounting pins with the sockets on the main unit.

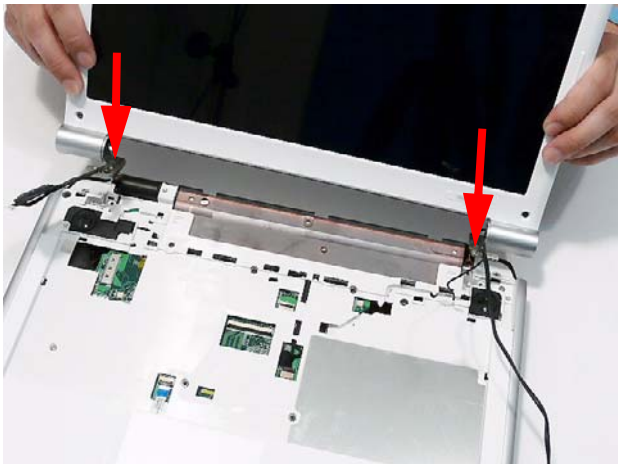


- 2. Insert the four screws to secure the LCD Module to the Upper Cover.




| Step       | Size     | Quantity | Screw Type                                                                            |
|------------|----------|----------|---------------------------------------------------------------------------------------|
| LCD Module | M2.5*6.0 | 4        |  |

**IMPORTANT:**Ensure all cables are clear of the lower cover before replacing the LCD module.


- 
3. Insert the LVDS/Microphone cable into the Upper Cover cable channel.

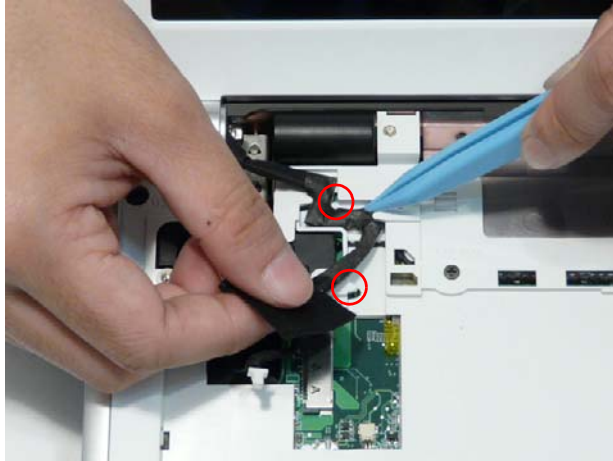


4. Connect the Microphone/Camera connector to the Mainboard.

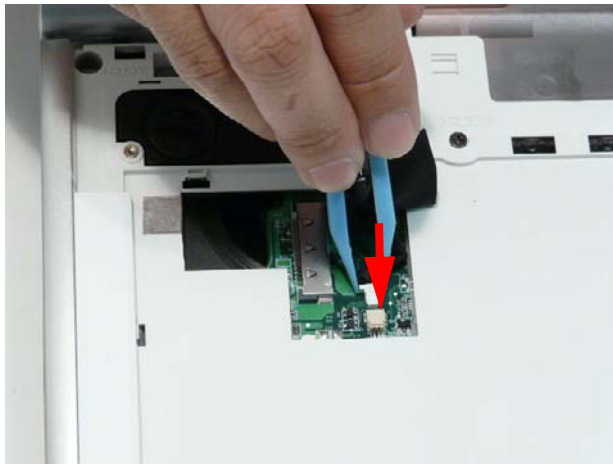


5. Connect the LVDS cable to the Mainboard.

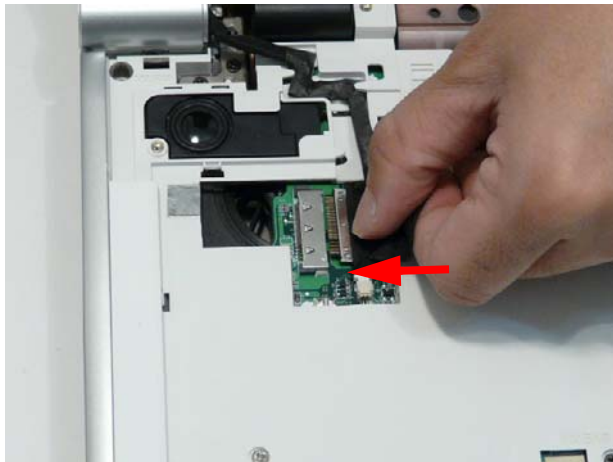


- 
6. Insert the Power Board cable into the Upper Cover cable channel.

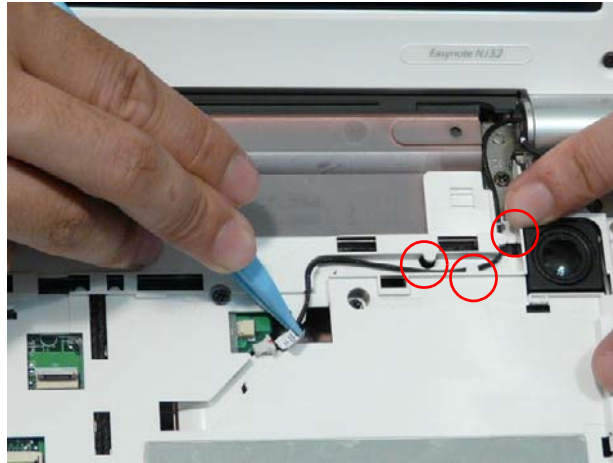

7. Connect the Power Board cable to the Mainboard.

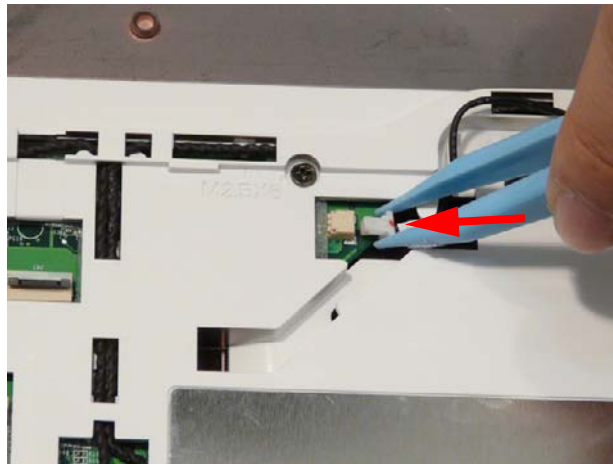


8. Turn the computer over and insert the Antennas into the Upper Cover cable channel.

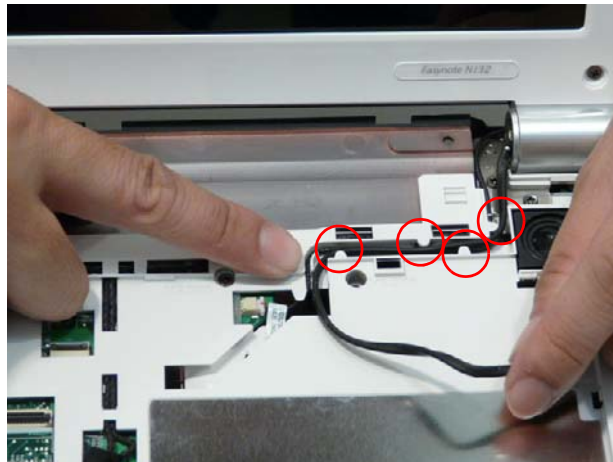


9. Carefully push the Antenna cables through to the underside of the computer.



10. Insert the Antenna cables into the cable channel as shown.

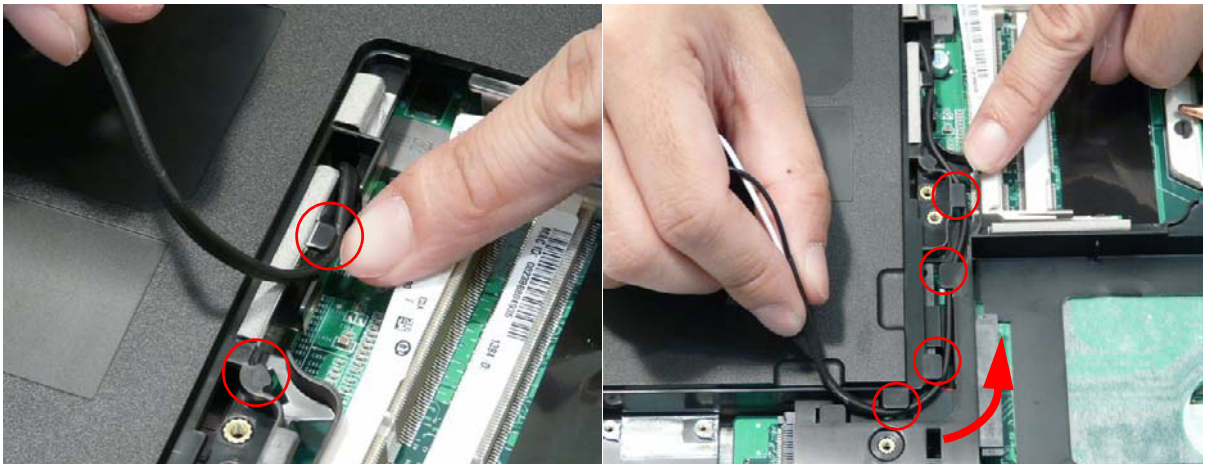

11. Turn the computer over. Replace the two screws to secure the LCD Module to the Lower Cover.

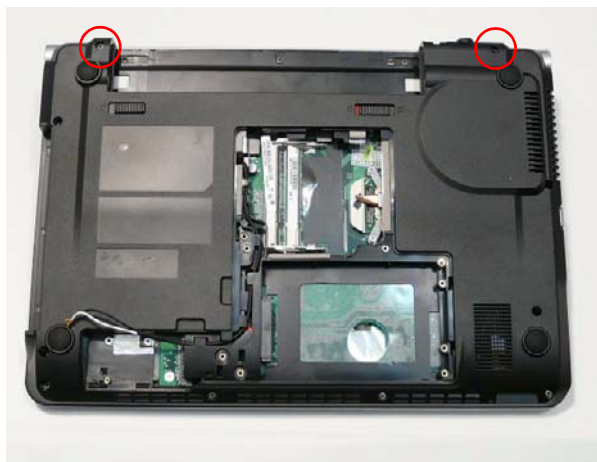


---

## Replacing the Keyboard


1. Turn the Keyboard over and place it on the TouchPad area as shown.




2. Connect the Keyboard FFC and push down on the Keyboard FFC securing latch as shown.

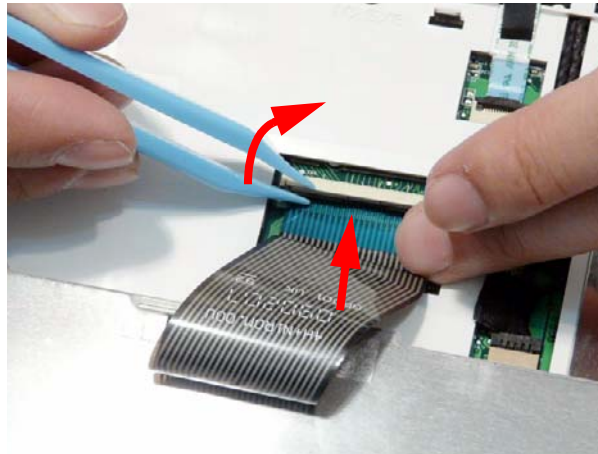

3. Insert the Switch Cover FFC into the Mainboard.

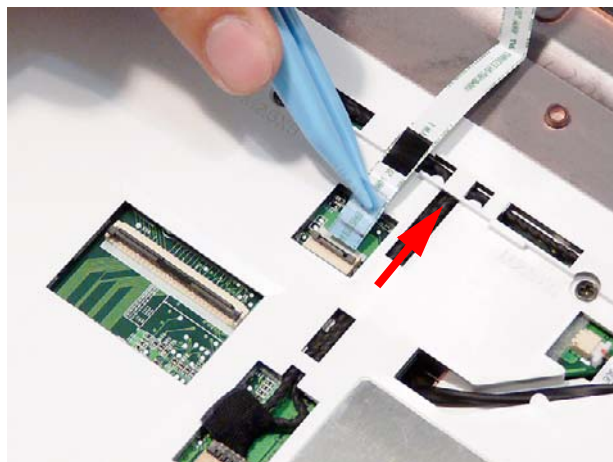

4. Push down on the Switch Cover FFC securing latch as shown.

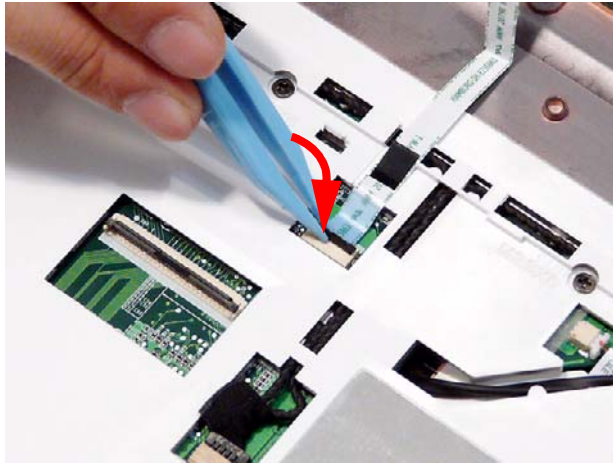


5. Flip the Keyboard over and push into place.



## Replacing the Switch Cover

**IMPORTANT:** The Media Board attached to the underside of the Switch Cover cannot be replaced individually. If the Media Board malfunctions, replace the entire Switch Cover assembly.

1. Lay the switch cover upside down on top of the keyboard.
2. Press down on the FFC to reattach the adhesive and secure it in place.

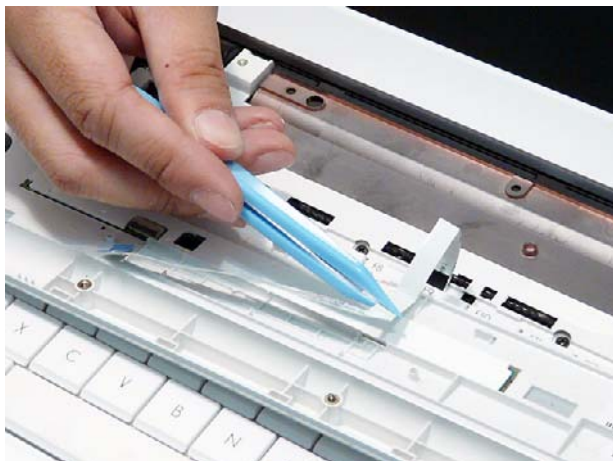


3. Connect the Media Board FFC and close the FFC locking latch as shown.



4. Rotate the Switch Cover and push into place along the top edge.



5. Replace the three screws to secure the Switch Cover to the Upper Cover.

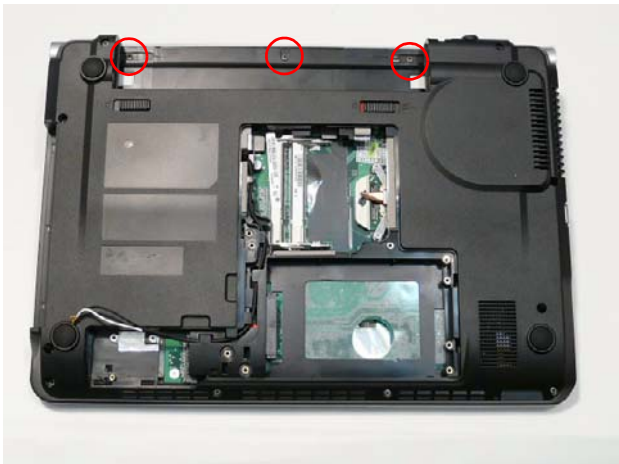


| Step         | Size     | Quantity | Screw Type                                                                           |
|--------------|----------|----------|--------------------------------------------------------------------------------------|
| Switch Cover | M2.5*6.0 | 3        |  |


# External Module Reassembly

## Replacing the HDD Module

- 1. Replace the HDD Carrier as shown.

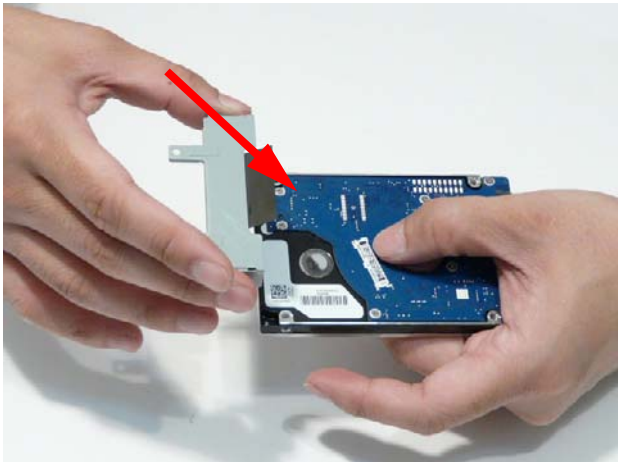


- 2. Replace the two screws to secure the HDD to the Carrier.

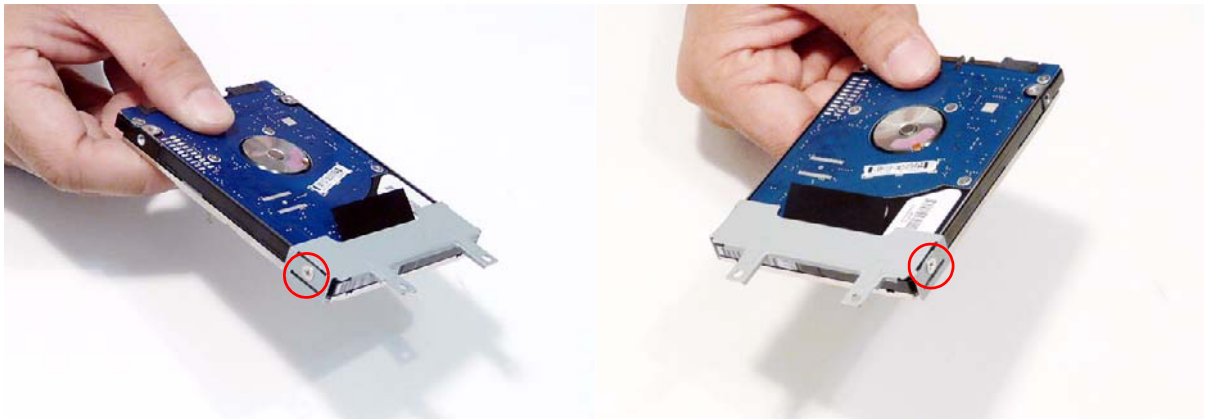


| Step       | Size | Quantity | Screw Type                                                                           |
|------------|------|----------|--------------------------------------------------------------------------------------|
| HDD Module | M3*3 | 2        |  |

- 
3. Insert the HDD Module into the Lower Cover as shown.

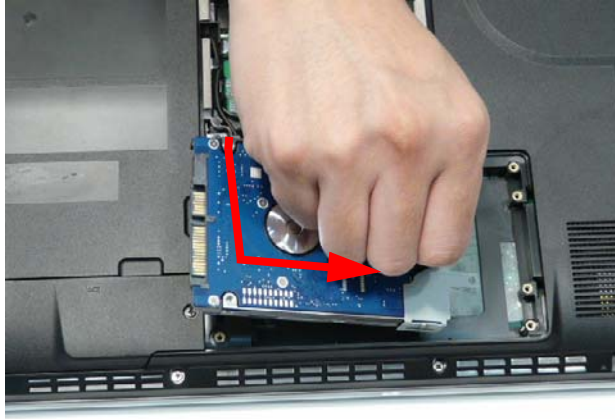

4. Slide the HDD Module in the direction of the arrow to connect the interface.

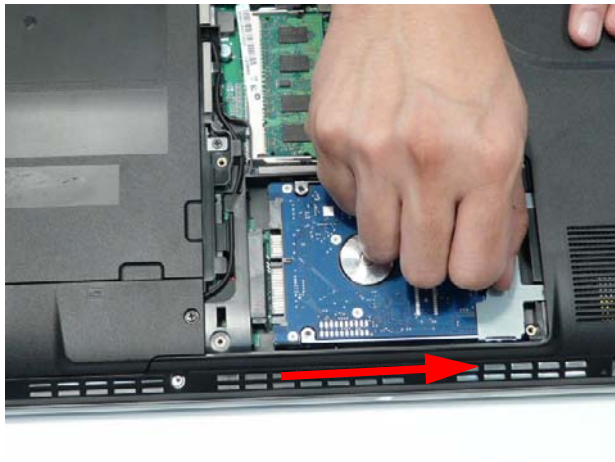

5. Replace the two screws to secure the HDD to the Lower Cover.



| Step       | Size     | Quantity | Screw Type                                                                         |
|------------|----------|----------|------------------------------------------------------------------------------------|
| HDD Module | M2.5*6.0 | 2        |  |

**NOTE:** To prevent damage to device, avoid pressing down on it or placing heavy objects on top of it.

## Replacing the WLAN Module

1. Insert the WLAN Module into the WLAN socket.



2. Move the antennas away and insert the single screw on the WLAN Module.



| Step        | Size | Quantity | Screw Type                                                                          |
|-------------|------|----------|-------------------------------------------------------------------------------------|
| WLAN Module | M2*3 | 1        |  |

3. Connect the antenna cables to the WLAN Module.



**IMPORTANT:**The black cable attaches to the **Main** terminal and the white cable attaches to the **AUX** terminal.



---

## Replacing the DIMM Module

1. Insert the DIMM Module in to the DIMM slot.
2. Press the module down to complete the installation.

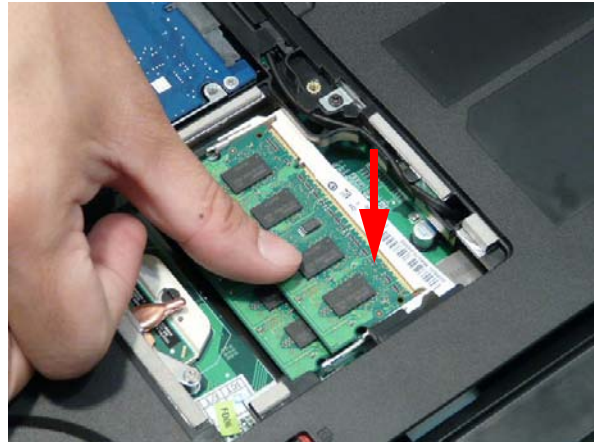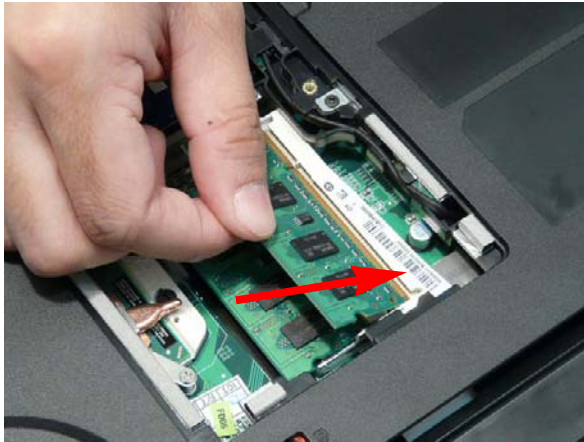

## Replacing the ODD module

1. Replace the ODD Bezel by inserting the bottom of the bezel and rotating upwards.



2. Replace the bracket on the ODD Module.




3. Replace the two screws to secure the ODD Bracket to the ODD Module.



| Step       | Size | Quantity | Screw Type                                                                          |
|------------|------|----------|-------------------------------------------------------------------------------------|
| ODD Module | M2*3 | 2        |  |

4. Slide the ODD Module into the Lower Cover as shown.

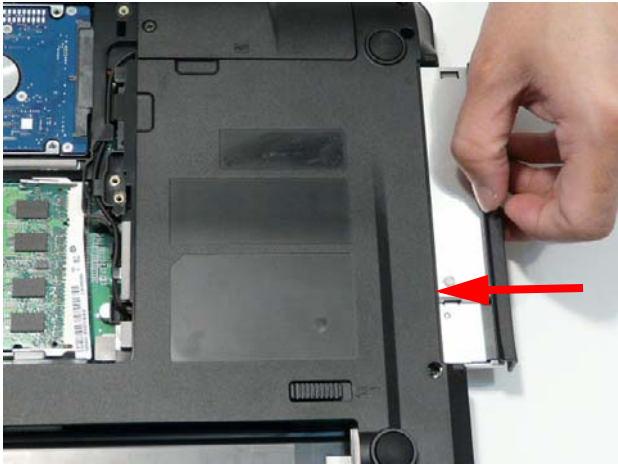

5. Replace the single screw to secure the ODD Module in place.




| Step       | Size     | Quantity | Screw Type                                                                          |
|------------|----------|----------|-------------------------------------------------------------------------------------|
| ODD Module | M2.5*6.0 | 1        |  |

## Replacing the Lower Covers

1. Replace the Memory Cover and press down around the perimeter to snap it in to place.
2. Replace the Wireless Cover and press down around the perimeter to snap it in to place.



3. Secure the covers in place with the captive screws.

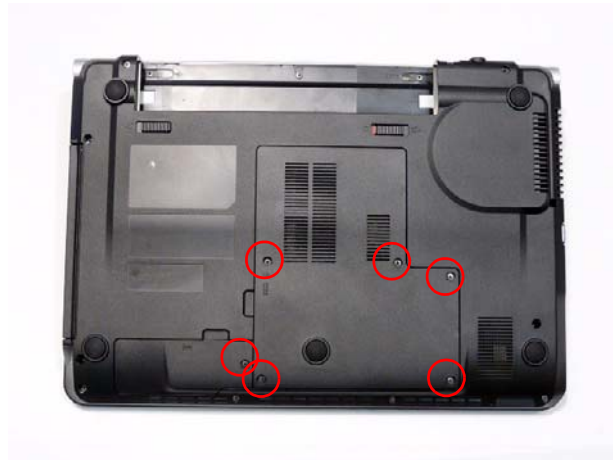

## Replacing the Battery

1. Insert the battery pack in to the main unit.
2. Slide the battery lock/unlock latch to the lock position.





# Troubleshooting

---

## Common Problems

Use the following procedure as a guide for computer problems.

**NOTE:** The diagnostic tests are intended to test only Acer products. Non-Acer products, prototype cards, or modified options can give false errors and invalid system responses.

1. Obtain the failing symptoms in as much detail as possible.
2. Verify the symptoms by attempting to re-create the failure by running the diagnostic test or by repeating the same operation.
3. Use the following table with the verified symptom to determine which page to go to.


| Symptoms (Verified)         | Go To    |
|-----------------------------|----------|
| Power On Issue              | Page 136 |
| No Display Issue            | Page 137 |
| LCD Failure                 | Page 139 |
| Internal Keyboard Failure   | Page 140 |
| TouchPad Failure            | Page 140 |
| Internal Speaker Failure    | Page 141 |
| Internal Microphone Failure | Page 142 |
| Right Side USB Failure      | Page 144 |
| Power Button Failure        | Page 144 |
| Other Functions Failure     | Page 145 |
| Intermittent Problems       | Page 146 |
| Undetermined Problems       | Page 146 |

4. If the Issue is still not resolved, see "Online Support Information" on page 185.

---

## Power On Issue

If the system doesn't power on, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

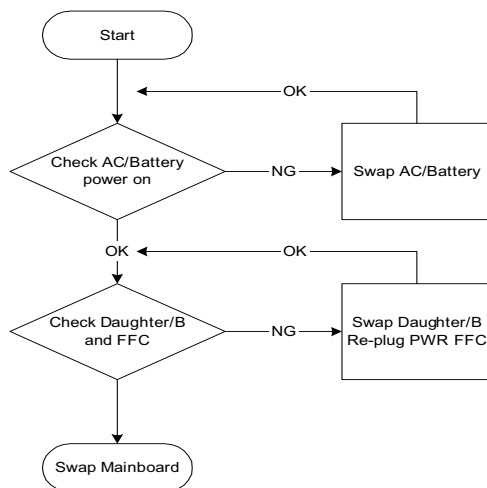

## Computer Shuts Down Intermittently


If the system powers off at intervals, perform the following actions one at a time to correct the problem.

1. Check the power cable is properly connected to the computer and the electrical outlet.
2. Remove any extension cables between the computer and the outlet.
3. Remove any surge protectors between the computer and the electrical outlet. Plug the computer directly into a known good electrical outlet.
4. Remove all external and non-essential hardware connected to the computer that are not necessary to boot the computer to the failure point.
5. Remove any recently installed software.
6. If the Issue is still not resolved, see "Online Support Information" on page 185.

---

## No Display Issue

If the **Display** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

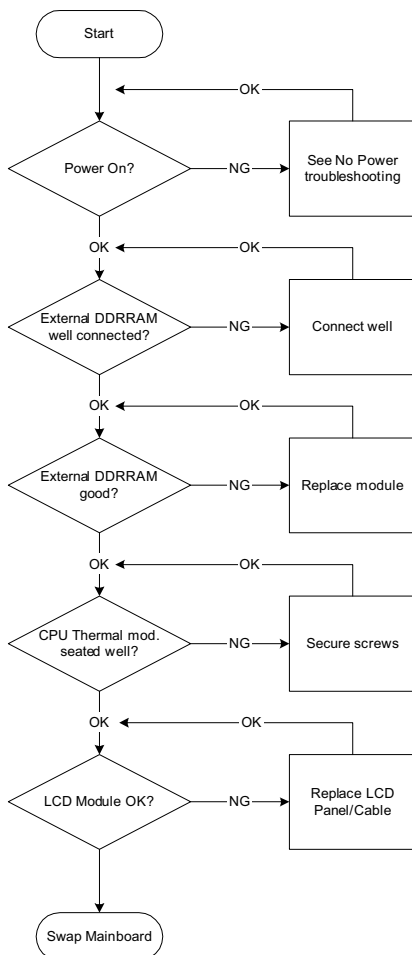

## No POST or Video

If the POST or video doesn't display, perform the following actions one at a time to correct the problem.

1. Make sure that the internal display is selected. On this notebook model, switching between the internal display and the external display is done by pressing **Fn+F5**. Reference Product pages for specific model procedures.
2. Make sure the computer has power by checking at least one of the following occurs:
  - Fans start up
  - Status LEDs light up

If there is no power, see “Power On Issue” on page 136.

3. Drain any stored power by removing the power cable and battery and holding down the power button for 10 seconds. Reconnect the power and reboot the computer.
4. Connect an external monitor to the computer and switch between the internal display and the external display is by pressing **Fn+F5** (on this model).

If the POST or video appears on the external display, see “LCD Failure” on page 139.

- 
5. Disconnect power and all external devices including port replicators or docking stations. Remove any memory cards and CD/DVD discs. Restart the computer.  
If the computer boots correctly, add the devices one by one until the failure point is discovered.
  6. Reseat the memory modules.
  7. Remove the drives (see “Disassembly Process” on page 44).
  8. If the Issue is still not resolved, see “Online Support Information” on page 185.

## Abnormal Video Display

If video displays abnormally, perform the following actions one at a time to correct the problem.

1. Reboot the computer.
2. If permanent vertical/horizontal lines or dark spots display in the same location, the LCD is faulty and should be replaced. See “Disassembly Process” on page 44.
3. If extensive pixel damage is present (different colored spots in the same locations on the screen), the LCD is faulty and should be replaced. See “Disassembly Process” on page 44.
4. Adjust the brightness to its highest level. See the User Manual for instructions on adjusting settings.  
**NOTE:** Ensure that the computer is not running on battery alone as this may reduce display brightness.  
If the display is too dim at the highest brightness setting, the LCD is faulty and should be replaced. See “Disassembly Process” on page 44.
5. Check the display resolution is correctly configured:
  - a. Minimize or close all Windows.
  - b. If display size is only abnormal in an application, check the view settings and control/mouse wheel zoom feature in the application.
  - c. If desktop display resolution is not normal, right-click on the desktop and select **Personalize→ Display Settings**.
  - d. Click and drag the Resolution slider to the desired resolution.
  - e. Click **Apply** and check the display. Readjust if necessary.
6. Roll back the video driver to the previous version if updated.
7. Remove and reinstall the video driver.
8. Check the Device Manager to determine that:
  - The device is properly installed. There are no red Xs or yellow exclamation marks.
  - There are no device conflicts.
  - No hardware is listed under Other Devices.
9. If the Issue is still not resolved, see “Online Support Information” on page 185.
10. Run the Windows Memory Diagnostic from the operating system DVD and follow the onscreen prompts.
11. If the Issue is still not resolved, see “Online Support Information” on page 185.

---

## Random Loss of BIOS Settings

If the computer is experiencing intermittent loss of BIOS information, perform the following actions one at a time to correct the problem.


1. If the computer is more than one year old, replace the CMOS battery.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. If the computer is experiencing HDD or ODD BIOS information loss, disconnect and reconnect the power and data cables between devices.

If the BIOS settings are still lost, replace the cables.

4. If HDD information is missing from the BIOS, the drive may be defective and should be replaced.
5. Replace the Motherboard.
6. If the Issue is still not resolved, see “Online Support Information” on page 185.


## LCD Failure

If the **LCD** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

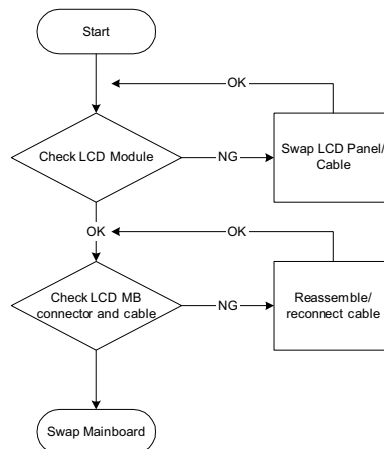


# Built-In Keyboard Failure

If the built-in **Keyboard** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

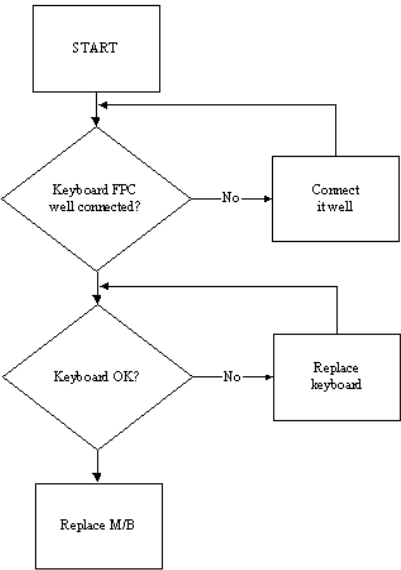

# TouchPad Failure


If the **TouchPad** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

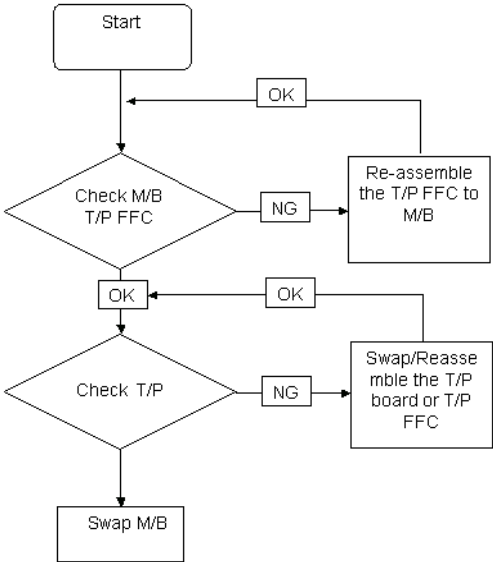

---

## Internal Speaker Failure

If the internal **Speakers** fail, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

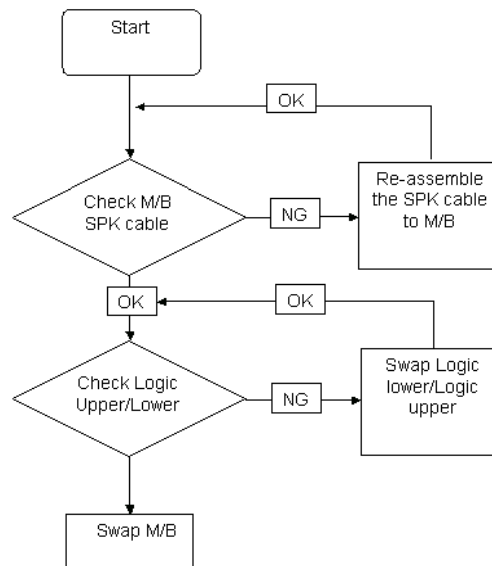

## Sound Problems

If sound problems are experienced, perform the following actions one at a time to correct the problem.

1. Reboot the computer.
2. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**. Check the Device Manager to determine that:
  - The device is properly installed.
  - There are no red Xs or yellow exclamation marks.
  - There are no device conflicts.
  - No hardware is listed under Other Devices.
3. Roll back the audio driver to the previous version, if updated recently.
4. Remove and reinstall the audio driver.
5. Ensure that all volume controls are set mid range:
  - a. Click the volume icon on the taskbar and drag the slider to 50. Ensure that the volume is not muted.
  - b. Click Mixer to verify that other audio applications are set to 50 and not muted.
6. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **Sound**. Ensure that Speakers are selected as the default audio device (green check mark).


**NOTE:** If Speakers does not show, right-click on the **Playback** tab and select **Show Disabled Devices** (clear by default).
7. Select Speakers and click **Configure** to start **Speaker Setup**. Follow the onscreen prompts to configure the speakers.
8. Remove and recently installed hardware or software.
9. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
10. Reinstall the Operating System.
11. If the Issue is still not resolved, see “Online Support Information” on page 185.

---

## Internal Microphone Failure

If the internal **Microphone** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

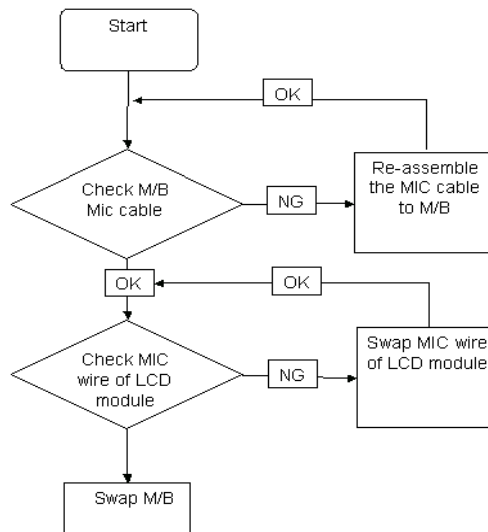

## Microphone Problems

If internal or external **Microphones** do not operate correctly, perform the following actions one at a time to correct the problem.

1. Check that the microphone is enabled. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **Sound** and select the **Recording** tab.
2. Right-click on the **Recording** tab and select **Show Disabled Devices** (clear by default).
3. The microphone appears on the **Recording** tab.
4. Right-click on the microphone and select **Enable**.
5. Select the microphone then click **Properties**. Select the **Levels** tab.
6. Increase the volume to the maximum setting and click **OK**.
7. Test the microphone hardware:
  - a. Select the microphone and click **Configure**.
  - b. Select **Set up microphone**.
  - c. Select the microphone type from the list and click **Next**.
  - d. Follow the onscreen prompts to complete the test.
8. If the Issue is still not resolved, see "Online Support Information" on page 185.

---

## HDD Not Operating Correctly

If the **HDD** does not operate correctly, perform the following actions one at a time to correct the problem.

1. Disconnect all external devices.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. Run the Windows Vista Startup Repair Utility:
  - a. insert the Windows Vista Operating System DVD in the ODD and restart the computer.
  - b. When prompted, press any key to start to the operating system DVD.
  - c. The **Install Windows** screen displays. Click **Next**.
  - d. Select **Repair your computer**.
  - e. The **System Recovery Options** screen displays. Click **Next**.
  - f. Select the appropriate operating system, and click **Next**.

**NOTE:** Click **Load Drivers** if controller drives are required.

- g. Select **Startup Repair**.
- h. Startup Repair attempts to locate and resolve issues with the computer.
- i. When complete, click **Finish**.


If an issue is discovered, follow the onscreen information to resolve the problem.

4. Run the Windows Memory Diagnostic Tool. For more information see Windows Help and Support.
5. Restart the computer and press F2 to enter the BIOS Utility. Check the BIOS settings are correct and that CD/DVD drive is set as the first boot device on the Boot menu.
6. Ensure all cables and jumpers on the HDD and ODD are set correctly.
7. Remove any recently added hardware and associated software.
8. Run the Windows Disk Defragmenter. For more information see Windows Help and Support.
9. Run Windows Check Disk by entering **chkdsk /r** from a command prompt. For more information see Windows Help and Support.
10. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
11. Replace the HDD. See "Disassembly Process" on page 44.


# USB Failure (Rightside)

If the rightside **USB** port fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

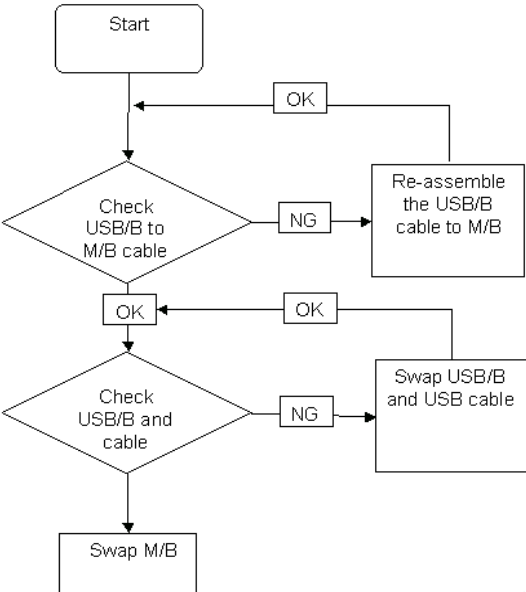

# Power Button Failure

If the Power Button fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

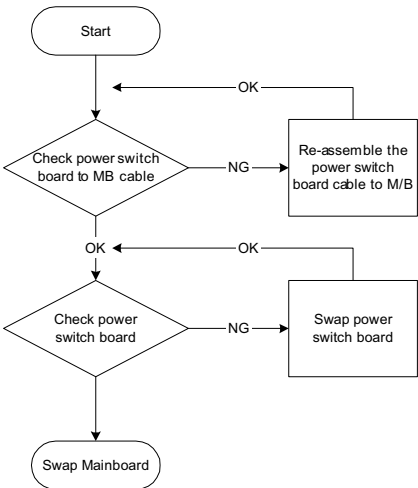

---

## External Mouse Failure

If an external **Mouse** fails, perform the following actions one at a time to correct the problem.

1. Try an alternative mouse.
2. If the mouse uses a wireless connection, insert new batteries and confirm there is a good connection. See the mouse user manual.
3. If the mouse uses a USB connection, try an alternate USB port.
4. Try an alternative program to verify mouse operation. Reinstall the program experiencing mouse failure.
5. Restart the computer.
6. Remove any recently added hardware and associated software.
7. Remove any recently added software and reboot.
8. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.

9. Run the Event Viewer to check the events log for errors. For more information see Windows Help and Support.
10. Roll back the mouse driver to the previous version if updated recently.
11. Remove and reinstall the mouse driver.
12. Check the Device Manager to determine that:
  - The device is properly installed. There are no red Xs or yellow exclamation marks.
  - There are no device conflicts.
  - No hardware is listed under Other Devices.
13. If the Issue is still not resolved, see “Online Support Information” on page 185.

## Other Failures

If the CRT Switch, Dock, LAN Port, external MIC or Speakers, PCI Express Card, 5-in-1 Card Reader or Volume Wheel fail, perform the following general steps to correct the problem. Do not replace a non-defective FRUs:

1. Check Drive whether is OK.
2. Check Test Fixture is ok.
3. Swap M/B to Try.

---

## Intermittent Problems

Intermittent system hang problems can be caused by a variety of reasons that have nothing to do with a hardware defect, such as: cosmic radiation, electrostatic discharge, or software errors. FRU replacement should be considered only when a recurring problem exists.

When analyzing an intermittent problem, do the following:

1. Run the advanced diagnostic test for the system board in loop mode at least 10 times.
2. If no error is detected, do not replace any FRU.
3. If any error is detected, replace the FRU. Rerun the test to verify that there are no more errors.

## Undetermined Problems

The diagnostic problems does not identify which adapter or device failed, which installed devices are incorrect, whether a short circuit is suspected, or whether the system is inoperative.

Follow these procedures to isolate the failing FRU (do not isolate non-defective FRU).

**NOTE:** Verify that all attached devices are supported by the computer.

**NOTE:** Verify that the power supply being used at the time of the failure is operating correctly. (See “Power On Issue” on page 136):

1. Power-off the computer.
2. Visually check them for damage. If any problems are found, replace the FRU.
3. Remove or disconnect all of the following devices:
  - Non-Acer devices
  - Printer, mouse, and other external devices
  - Battery
  - Hard disk drive
  - DIMM
  - CD-ROM/Diskette drive Module
  - PC Cards
4. Power-on the computer.
5. Determine if the problem has changed.
6. If the problem does not recur, reconnect the removed devices one at a time until you find the failing FRU.
7. If the problem remains, replace the following FRU one at a time. Do not replace a non-defective FRU:
  - System board
  - LCD assembly

---

# POST Code Reference Tables

These tables describe the POST codes and components of the POST process.

## Chipset POST Codes

The following table details the chipset POST codes and functions used in the POST.

| Code | Beeps   | POST Routine Description                                  |
|------|---------|-----------------------------------------------------------|
| 02h  |         | Verify Real Mode                                          |
| 03h  |         | Disable Non-Maskable Interrupt (NMI)                      |
| 04h  |         | Get CPU type                                              |
| 06h  |         | Initialize system hardware                                |
| 08h  |         | Initialize chipset with initial POST values               |
| 09h  |         | Set IN POST flag                                          |
| 0Ah  |         | Initialize CPU registers                                  |
| 0Bh  |         | Enable CPU cache                                          |
| 0Ch  |         | Initialize caches to initial POST values                  |
| 0Eh  |         | Initialize I/O component                                  |
| 0Fh  |         | Initialize the local bus IDE                              |
| 10h  |         | Initialize Power Management                               |
| 11h  |         | Load alternate registers with initial POST values         |
| 12h  |         | Restore CPU control word during warm boot                 |
| 13h  |         | Initialize PCI Bus Mastering devices                      |
| 14h  |         | Initialize keyboard controller                            |
| 16h  | 1-2-2-3 | BIOS ROM checksum                                         |
| 17h  |         | Initialize cache before memory autosize                   |
| 18h  | 8254    | timer initialization                                      |
| 1Ah  | 8237    | DMA controller initialization                             |
| 1Ch  |         | Reset Programmable Interrupt Controller                   |
| 20h  | 1-3-1-1 | Test DRAM refresh                                         |
| 22h  | 1-3-1-3 | Test 8742 Keyboard Controller                             |
| 24h  |         | Set ES segment register to 4 GB                           |
| 26h  |         | Enable A20 line                                           |
| 28h  |         | Autosize DRAM                                             |
| 29h  |         | Initialize POST Memory Manager                            |
| 2Ah  |         | Clear 512 KB base RAM                                     |
| 2Ch  | 1-3-4-1 | RAM failure on address line xxxx*                         |
| 2Eh  | 1-3-4-3 | RAM failure on data bits xxxx* of low byte of memory bus  |
| 2Fh  |         | Enable cache before system BIOS shadow                    |
| 30h  | 1-4-1-1 | RAM failure on data bits xxxx* of high byte of memory bus |
| 32h  |         | Test CPU bus-clock frequency                              |
| 33h  |         | Initialize Phoenix Dispatch Manager                       |
| 36h  |         | Warm start shut down                                      |
| 38h  |         | Shadow system BIOS ROM                                    |
| 3Ah  |         | Autosize cache                                            |

| Code | Beeps   | POST Routine Description                       |
|------|---------|------------------------------------------------|
| 3Ch  |         | Advanced configuration of chipset registers    |
| 3Dh  |         | Load alternate registers with CMOS values      |
| 42h  |         | Initialize interrupt vectors                   |
| 45h  |         | POST device initialization                     |
| 46h  | 2-1-2-3 | Check ROM copyright notice                     |
| 48h  |         | Check video configuration against CMOS         |
| 49h  |         | Initialize PCI bus and devices                 |
| 4Ah  |         | Initialize all video adapters in system        |
| 4Bh  |         | QuietBoot start (optional)                     |
| 4Ch  |         | Shadow video BIOS ROM                          |
| 4Eh  |         | Display BIOS copyright notice                  |
| 50h  |         | Display CPU type and speed                     |
| 51h  |         | Initialize EISA board                          |
| 52h  |         | Test keyboard                                  |
| 54h  |         | Set key click if enabled                       |
| 58h  | 2-2-3-1 | Test for unexpected interrupts                 |
| 59h  |         | Initialize POST display service                |
| 5Ah  |         | Display prompt <b>Press F2 to enter SETUP</b>  |
| 5Bh  |         | Disable CPU cache                              |
| 5Ch  |         | Test RAM between 512 and 640 KB                |
| 60h  |         | Test extended memory                           |
| 62h  |         | Test extended memory address lines             |
| 64h  |         | Jump to UserPatch1                             |
| 66h  |         | Configure advanced cache registers             |
| 67h  |         | Initialize Multi Processor APIC                |
| 68h  |         | Enable external and CPU caches                 |
| 69h  |         | Setup System Management Mode (SMM) area        |
| 6Ah  |         | Display external L2 cache size                 |
| 6Bh  |         | Load custom defaults (optional)                |
| 6Ch  |         | Display shadow-area message                    |
| 6Eh  |         | Display possible high address for UMB recovery |
| 70h  |         | Display error messages                         |
| 72h  |         | Check for configuration errors                 |
| 76h  |         | Check for keyboard errors                      |
| 7Ch  |         | Set up hardware interrupt vectors              |
| 7Eh  |         | Initialize coprocessor if present              |
| 80h  |         | Disable onboard Super I/O ports and IRQs       |
| 81h  |         | Late POST device initialization                |
| 82h  |         | Detect and install external RS232 ports        |
| 83h  |         | Configure non-MCD IDE controllers              |
| 84h  |         | Detect and install external parallel ports     |
| 85h  |         | Initialize PC-compatible PnP ISA devices       |
| 86h  |         | Re-initialize onboard I/O ports.               |

| Code | Beeps | POST Routine Description                                              |
|------|-------|-----------------------------------------------------------------------|
| 87h  |       | Configure Motherboard Configurable Devices (optional)                 |
| 88h  |       | Initialize BIOS Data Area                                             |
| 89h  |       | Enable Non-Maskable Interrupts (NMIs)                                 |
| 8Ah  |       | Initialize Extended BIOS Data Area                                    |
| 8Bh  |       | Test and initialize PS/2 mouse                                        |
| 8Ch  |       | Initialize floppy controller                                          |
| 8Fh  |       | Determine number of ATA drives (optional)                             |
| 90h  |       | Initialize hard-disk controllers                                      |
| 91h  |       | Initialize local-bus hard-disk controllers                            |
| 92h  |       | Jump to UserPatch2                                                    |
| 93h  |       | Build MPTABLE for multi-processor boards                              |
| 95h  |       | Install CD ROM for boot                                               |
| 96h  |       | Clear huge ES segment register                                        |
| 97h  |       | Fixup Multi Processor table                                           |
| 98h  | 1-2   | Search for option ROMs. One long, two short beeps on checksum failure |
| 99h  |       | Check for SMART Drive (optional)                                      |
| 9Ah  |       | Shadow option ROMs                                                    |
| 9Ch  |       | Set up Power Management                                               |
| 9Dh  |       | Initialize security engine (optional)                                 |
| 9Eh  |       | Enable hardware interrupts                                            |
| 9Fh  |       | Determine number of ATA and SCSI drives                               |
| A0h  |       | Set time of day                                                       |
| A2h  |       | Check key lock                                                        |
| A4h  |       | Initialize Typematic rate                                             |
| A8h  |       | Erase F2 prompt                                                       |
| AAh  |       | Scan for F2 key stroke                                                |
| ACH  |       | Enter SETUP                                                           |
| A Eh |       | Clear Boot flag                                                       |
| B0h  |       | Check for errors                                                      |
| B2h  |       | POST done - prepare to boot operating system                          |
| B4h  | 1     | One short beep before boot                                            |
| B5h  |       | Terminate QuietBoot (optional)                                        |
| B6h  |       | Check password (optional)                                             |
| B9h  |       | Prepare Boot                                                          |
| BAh  |       | Initialize DMI parameters                                             |
| BBh  |       | Initialize PnP Option ROMs                                            |
| BCh  |       | Clear parity checkers                                                 |
| BDh  |       | Display MultiBoot menu                                                |
| BEh  |       | Clear screen (optional)                                               |
| BFh  |       | Check virus and backup reminders                                      |
| C0h  |       | Try to boot with INT 19                                               |
| C1h  |       | Initialize POST Error Manager (PEM)                                   |
| C2h  |       | Initialize error logging                                              |


| Code | Beeps | POST Routine Description               |
|------|-------|----------------------------------------|
| C3h  |       | Initialize error display function      |
| C4h  |       | Initialize system error handler        |
| C5h  |       | PnPnd dual CMOS (optional)             |
| C6h  |       | Initialize notebook docking (optional) |
| C7h  |       | Initialize notebook docking late       |
| C8h  |       | Force check (optional)                 |
| C9h  |       | Extended checksum (optional)           |
| D2h  |       | Unknown interrupt                      |

| Code | Beeps | For Boot Block in Flash ROM       |
|------|-------|-----------------------------------|
| E0h  |       | Initialize the chipset            |
| E1h  |       | Initialize the bridge             |
| E2h  |       | Initialize the CPU                |
| E3h  |       | Initialize system timer           |
| E4h  |       | Initialize system I/O             |
| E5h  |       | Check force recovery boot         |
| E6h  |       | Checksum BIOS ROM                 |
| E7h  |       | Go to BIOS                        |
| E8h  |       | Set Huge Segment                  |
| E9h  |       | Initialize Multi Processor        |
| EAh  |       | Initialize OEM special code       |
| EBh  |       | Initialize PIC and DMA            |
| ECh  |       | Initialize Memory type            |
| EDh  |       | Initialize Memory size            |
| EEh  |       | Shadow Boot Block                 |
| EFh  |       | System memory test                |
| F0h  |       | Initialize interrupt vectors      |
| F1h  |       | Initialize Run Time Clock         |
| F2h  |       | Initialize video                  |
| F3h  |       | Initialize System Management Mode |
| F4h  | 1     | Output one beep before boot       |
| F5h  |       | Boot to Mini DOS                  |
| F6h  |       | Clear Huge Segment                |
| F7h  |       | Boot to Full DOS                  |

\* If the BIOS detects error 2C, 2E, or 30 (base 512K RAM error), it displays an additional word-bitmap (xxxx) indicating the address line or bits that failed. For example, **2C 0002** means address line 1 (bit one set) has failed. **2E 1020** means data bits 12 and 5 (bits 12 and 5 set) have failed in the lower 16 bits. Note that error 30 cannot occur on 386SX systems because they have a 16 rather than 32-bit bus. The BIOS also sends the bitmap to the port-80 LED display. It first displays the check point code, followed by a delay, the high-order byte, another delay, and then the low-order byte of the error. It repeats this sequence continuously.


# Jumper and Connector Locations

## Top View

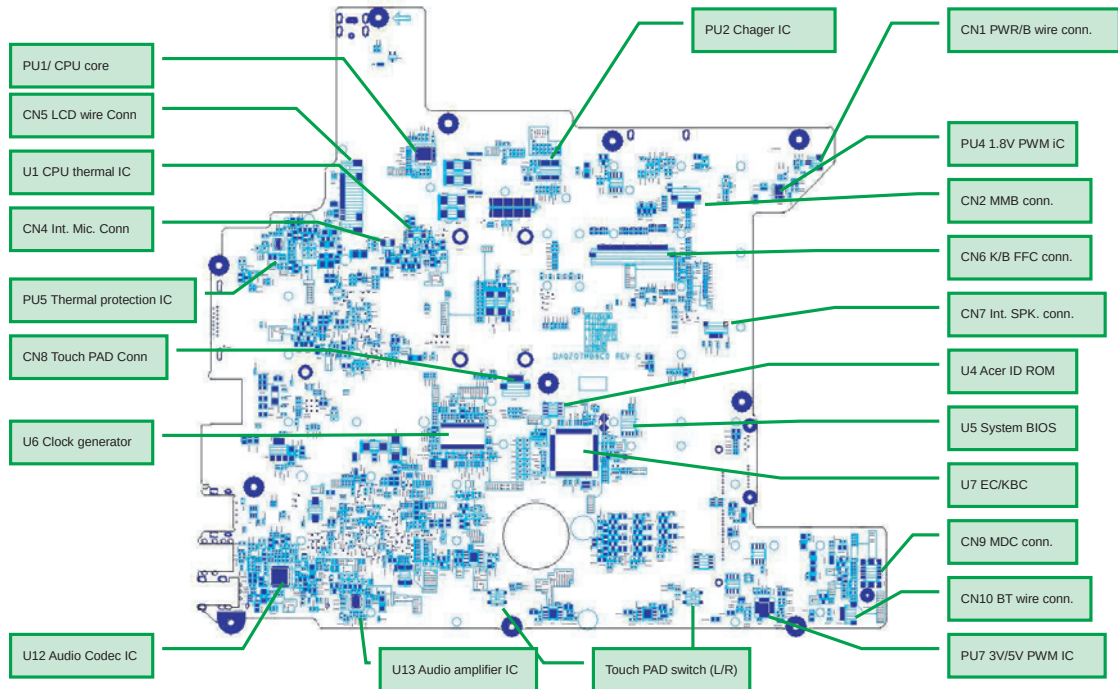

| Item | Description                | Item | Description               |
|------|----------------------------|------|---------------------------|
| PU1  | CPU Core                   | CN9  | MDC Connector             |
| PU2  | Charger IC                 | CN10 | Bluetooth Cable Connector |
| PU4  | C1.8V PWM IC               | U1   | CPU Thermal IC            |
| PU5  | Thermal protection IC      | U4   | ID ROM                    |
| PU7  | 3V/5V PWM IC               | U5   | System BIOS               |
| CN1  | PWR/B Wire Connector       | U6   | Clock Generator           |
| CN2  | MMB Connector              | U7   | EC/KBC                    |
| CN4  | Internal Mic Connector     | U12  | Audio Codec IC            |
| CN5  | LCD Wire Connector         | U13  | Audio Amplifier IC        |
| CN7  | Internal Speaker Connector |      | Touch PAD switch          |
| CN8  | Touch Pad Connector        |      |                           |

# Bottom View

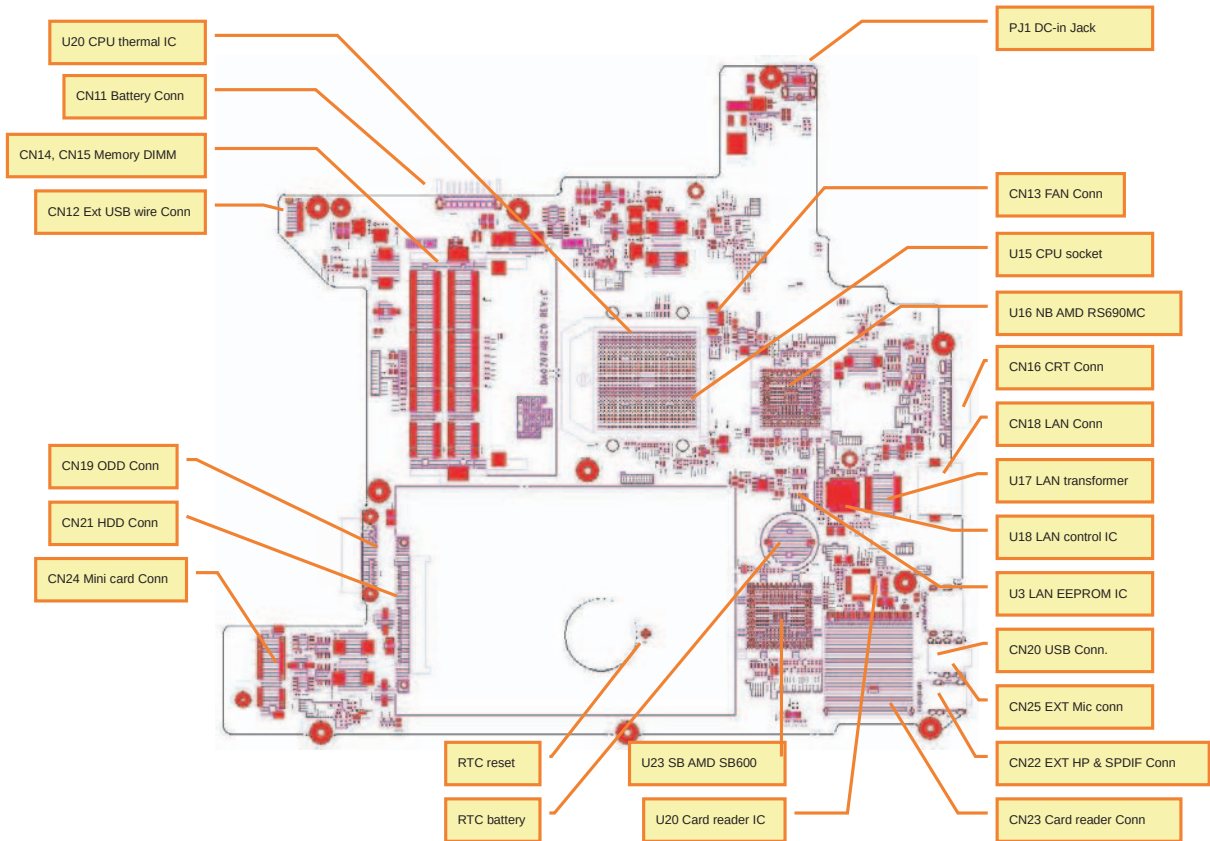

| Item | Description                  | Item | Description         |
|------|------------------------------|------|---------------------|
| CN11 | Battery Connector            | CN24 | Mini Card Connector |
| CN12 | External USB cable connector | PJ1  | DC-in Jack          |
| CN13 | Fan Connector                |      | RTC Reset           |
| CN14 | Memory DIMM                  |      | RTC Battery         |
| CN15 | Memory DIMM                  | U3   | LAN EEPROM IC       |
| CN16 | CRT Connector                | U15  | CPU Socket          |
| CN18 | LAN Connector                | U16  | NB AMD RS690MC      |
| CN19 | ODD Connector                | U17  | LAN Transformer     |
| CN20 | USB Connector                | U18  | LAN Control IC      |
| CN21 | Hard drive Connector         | U20  | Card Reader IC      |
| CN22 | Ext HP & SPDIF Connector     | U20  | CPU Thermal IC      |
| CN23 | Card Reader Connector        | U23  | SB AMD SB600        |

---


# Clearing Password Check and BIOS Recovery

This section provides you the standard operating procedures of clearing password and BIOS recovery for Z08. Z08 provides one Hardware Open Gap on the main board for clearing password check, and one Hotkey for enabling BIOS Recovery.

## Clearing Password Check

### Hardware Open Gap Description

| Item | Description       | Location   |
|------|-------------------|------------|
| G3   | Clear CMOS Jumper | Memory Bay |

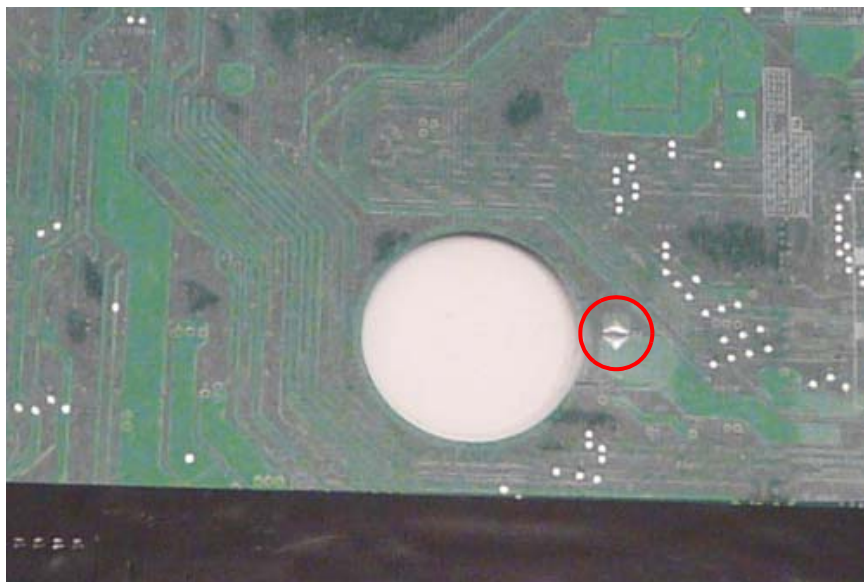

### Steps for Clearing BIOS Password Check

If users set BIOS Password (Supervisor Password and/or User Password) for a security reason, BIOS will ask the password during systems POST or when systems enter to BIOS Setup menu. However, once it is necessary to bypass the password check, users need to short the HW Gap to clear the password by the following steps:

1. Power off the system, and unplug the AC and Battery from the machine.
2. Open the Hard Drive and RAM doors.
3. Remove the Hard drive
4. Find the HW Gap on M/B as shown in the picture.
5. Use an electric conductivity tool to short the two points of HW Gap G3.
6. Plug in AC, keeping the HW Gap shorted, and press Power Button to power on the system till BIOS POST finishes. Then remove the tool from the HW Gap.
7. Restart system. Press F2 key to enter BIOS Setup menu.

If there is no Password request, the BIOS Password has been successfully cleared. Otherwise, please follow the steps and try again.

**NOTE:** The steps are only for clearing BIOS Password (Supervisor Password and User Password).

---

## BIOS Recovery by Crisis Disk

### Steps for BIOS Recovery from USB Storage:

Before doing this, prepare the Crisis USB key. The Crisis USB key can be made by executing the Crisis Disk program in another system with Windows XP OS.

Follow the steps below:

1. Modify the ROM archive file name from **Zg5 BIOS** to **ZG5ia32.fd**.
2. Save the ROM file along with **Flashit.exe** (BIOS flash tool) to the root directory of the USB storage disk.
3. Plug USB storage disk into the USB port.
4. Press **Fn + ESC + Power** buttons. Remove your finger from the Power button but keep the Fn + Esc keys pressed till the Power button flashes once.

**Note:** During the first iteration, the LED of the USB disk flashes for about 3 - 7 minutes. After this, the system restarts. You can check the BIOS version after the system restarts. If correct, the crisis system is set up correctly.

## FRU (Field Replaceable Unit) List

---


This chapter gives you the FRU (Field Replaceable Unit) listing in global configurations of Gateway NV42. Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization).

Please note that WHEN ORDERING FRU PARTS, you should check the most up-to-date information available on your regional web or channel. For whatever reasons a part number change is made, it will not be noted on the printed Service Guide. For ACER AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. You MUST use the local FRU list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

NOTE: To scrap or to return the defective parts, you should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by your regional Acer office on how to return it.


# Gateway NV42 Exploded Diagrams

## Main Assembly

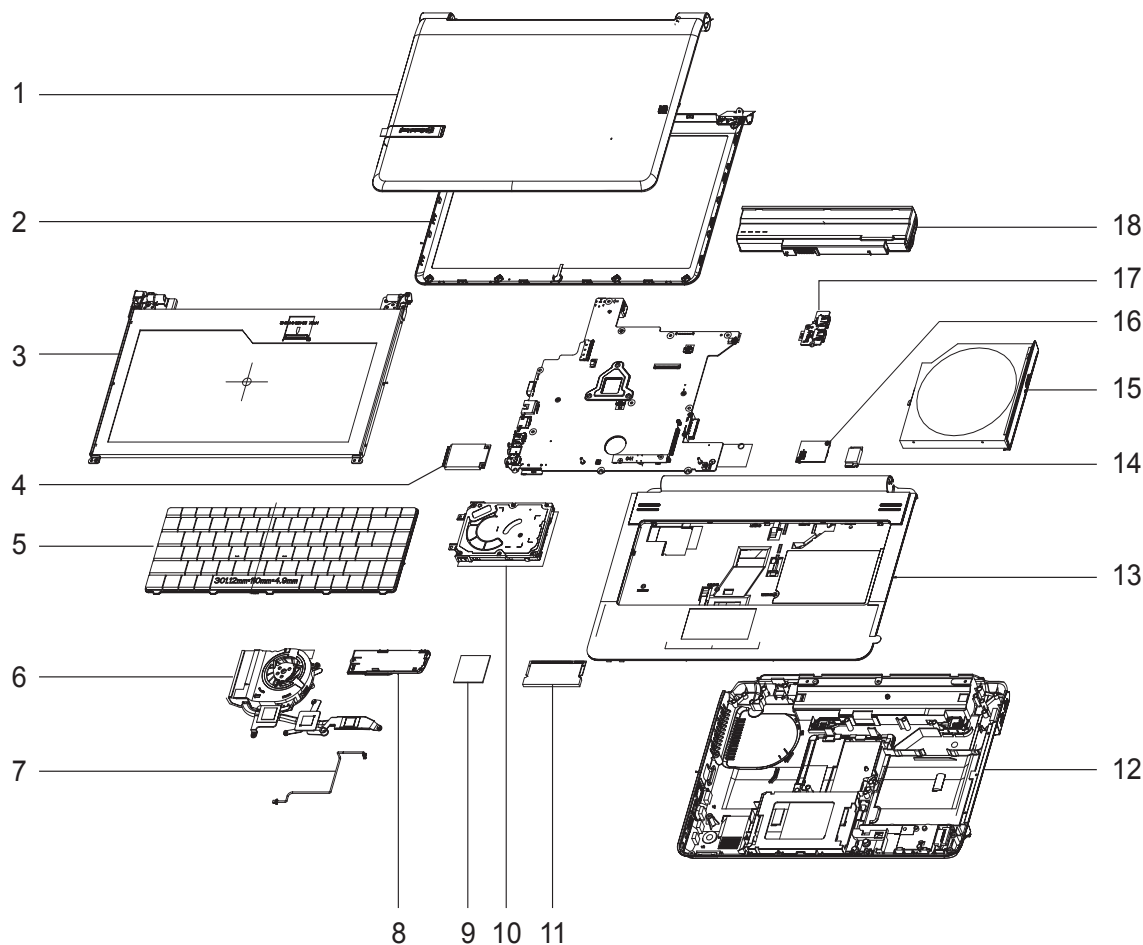

| Item | Description                | Part Number                                  | Item | Description | Part Number  |
|------|----------------------------|----------------------------------------------|------|-------------|--------------|
| 1    | LCD Cover                  | 60.B5307.003                                 | 10   | HDD Module  | KH.16004.006 |
| 2    | LCD Bezel                  | 60.WB707.004                                 | 11   | DIMM Module | KN.2GB0G.012 |
| 3    | LCD Panel and Hinges (L+R) | LK.14005.006<br>33.WB707.003<br>33.WB707.004 | 12   | Lower Cover | 60.WB707.002 |
| 4    | WLAN Board                 | NI.23600.046                                 | 13   | Upper Cover | 60.WCY07.001 |
| 5    | Keyboard                   | KB.I140G.028                                 | 14   | Bluetooth   | BT.21100.006 |
| 6    | Thermal Module             | 60.WD507.003                                 | 15   | ODD Module  | KU.00801.030 |
| 7    | Power Board Cable          | 50.WB707.003                                 | 16   | Modem       | 54.WB707.001 |
| 8    | Mini PCI Cover             | 42.WB707.002                                 | 17   | USB Board   | 55.WFB07.001 |
| 9    | CPU                        | KC.AL002.310                                 | 18   | Battery     | BT.00607.072 |

# LCD Assembly

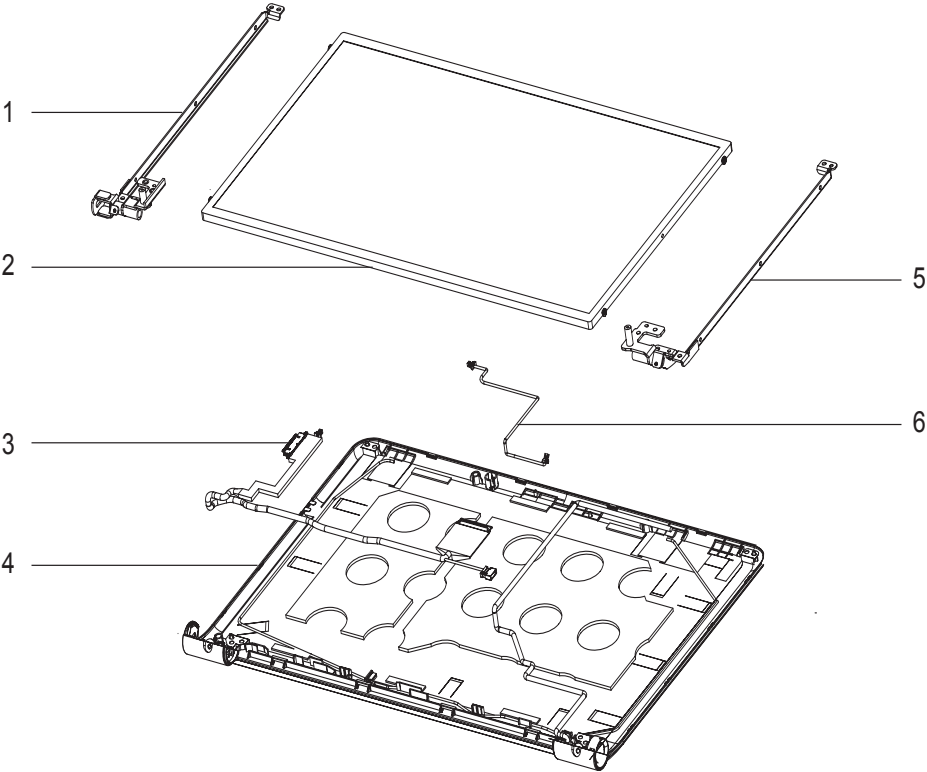

| Item | Description       | Part Number  |
|------|-------------------|--------------|
| 1    | LCD Bracket_L     | 33.WB707.003 |
| 2    | LCD Panel         | LK.14005.006 |
| 3    | LCD Cable         | 50.WB707.004 |
| 4    | LCD Module        | 6M.WFB07.001 |
| 5    | LCD Bracket_R     | 33.WB707.004 |
| 6    | Power Board Cable | 50.WB707.003 |

## Gateway NV42 FRU List

| Category                                                                            | Description                                                              | Acer P/N                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------|
| <b>Adapter</b>                                                                      |                                                                          |                             |
|                                                                                     | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A, LV5 LED LF        | AP.06501.026                |
|                                                                                     | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B 1LF, LV5 LED LF      | AP.0650A.012                |
|                                                                                     | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG (OBL)             | AP.06501.023                |
| <b>Battery</b>                                                                      |                                                                          |                             |
|    | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell 4400mAh Main COMMON | BT.00607.072                |
|                                                                                     | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell 4400mAh Main COMMON   | BT.00607.073                |
|                                                                                     | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6 cell 4400mAh Main COMMON      | BT.00603.093                |
| <b>Board</b>                                                                        |                                                                          |                             |
|    | MODEM CARD T60M955.04                                                    | 54.WB707.001                |
|    | Foxconn Bluetooth FOX BRM 2046 BT2.1 f/w: 861                            | BT.21100.006 - BH.21100.004 |
|  | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)                           | NI.23600.046                |
|                                                                                     | Liteon Wireless LAN Atheros HB93 1x2 BGN (HM) WN6602AH                   | NI.23600.051                |
|                                                                                     | Foxconn Wirelss LAN Atheros HB95 1x1 BG (HM)                             | NI.23600.047                |
|  | USB BOARD                                                                | 55.WFB07.001                |
| <b>Cable</b>                                                                        |                                                                          |                             |
|                                                                                     | POWER CORD US 3PIN ROHS                                                  | 27.TAXV7.001                |
|                                                                                     | POWER CORD(EU) 1.8M 3PBLACK FM010008-010                                 | 27.TATV7.001                |
|                                                                                     | POWER CORD AU W/LABEL (3 PIN)                                            | 27.A50V7.003                |
|                                                                                     | POWER CORD PRC 3P Y536B30001218008                                       | 27.TATV7.004                |
|                                                                                     | POWER CORD UK 3PIN                                                       | 27.A03V7.004                |
|                                                                                     | POWER CORD US-110V (BSMI)                                                | 27.A99V7.002                |
|                                                                                     | POWER CORD SWISS 3 PIN                                                   | 27.A99V7.004                |
|                                                                                     | PWR CORD(ISR)1.8M 3PBLK FZ010008-038                                     | 27.TATV7.005                |
|                                                                                     | POWER CORD ITALIAN 3PIN                                                  | 27.A99V7.005                |
|                                                                                     | POWER CORD(S.A) 1.8M 3BLACK FZ010008-006                                 | 27.T48V7.001                |
|                                                                                     | PWR CORD V943B30001218008 DANISH 3P                                      | 27.A03V7.006                |
|  | BLUETOOTH CABLE                                                          | 50.WB707.001                |

| Category                                                                            | Description                                                                    | Acer P/N     |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------|
|    | USB CABLE                                                                      | 50.WB707.002 |
| <b>Case/Cover/Bracket Assembly</b>                                                  |                                                                                |              |
|    | MIDDLE COVER W/MMB, FFC CABLE                                                  | 60.WD507.001 |
|                                                                                     | MIDDLE COVER BLACK W/MMB, FFC CABLE                                            | 42.WD507.001 |
|    | UPPER CASE ASSY GW BLACK W/SPEAKER,TP,TP FFC                                   | 60.WCY07.001 |
|                                                                                     | UPPER CASE ASSY GW WHITE W/SPEAKER,TP,TP FFC                                   | 60.WB707.001 |
|    | LOWER CASE ASSY W/RJ11                                                         | 60.WB707.002 |
|                                                                                     | LOWER CASE ASSY W/O RJ11                                                       | 60.B5307.002 |
|    | MINI PCI COVER                                                                 | 42.WB707.002 |
|   | HDD COVER                                                                      | 42.WB707.003 |
|                                                                                     | DUMMY SD CARD                                                                  | 42.WF807.003 |
| <b>CPU/Processor</b>                                                                |                                                                                |              |
|  | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core                                      | KC.AL002.310 |
|                                                                                     | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2                                   | KC.ATF02.200 |
|                                                                                     | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2                                       | KC.ATK02.420 |
| <b>Super Multi Drive</b>                                                            |                                                                                |              |
|  | TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA Add to: | KU.00801.030 |
|                                                                                     | HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA               | KU.0080D.040 |
|                                                                                     | SONY SUPER-MULTI DRIVE 12.7MM TRAY DL 8X AD-7580S LF W/O BEZEL SATA            | KU.0080E.017 |
|                                                                                     | PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA             | KU.0080F.004 |
|  | ODD BEZEL - SUPER MULTI BLACK PRINTING                                         | 42.WCY07.002 |
|  | ODD BRACKET                                                                    | 33.WB707.001 |

| Category                                                                            | Description                                                            | Acer P/N     |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|
| <b>HDD</b>                                                                          |                                                                        |              |
|    | HDD TOSHIBA 2.5" 5400rpm 160GB MK1655GSX Libra SATA LF F/W: FG011J     | KH.16004.006 |
|                                                                                     | HDD WD 2.5" 5400rpm 160GB WD1600BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11 | KH.16008.022 |
|                                                                                     | HDD SEAGATE 2.5" 5400rpm 250GB ST9250315AS Wyatt SATA LF F/W:0001SDM1  | KH.25001.016 |
|                                                                                     | HDD TOSHIBA 2.5" 5400rpm 250GB MK2555GSX Libra SATA LF F/W:FG001J      | KH.25004.003 |
|                                                                                     | HDD HGST 2.5" 5400rpm 250GB HTS545025B9A300 Panther B SATA LF F/W:C60F | KH.25007.015 |
|                                                                                     | HDD WD 2.5" 5400rpm 250GB WD2500BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11 | KH.25008.021 |
|                                                                                     | HDD TOSHIBA 2.5" 5400rpm 320GB MK3255GSX Libra SATA LF F/W:FG011J      | KH.32004.002 |
|                                                                                     | HDD WD 2.5" 5400rpm 320GB WD3200BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11 | KH.32008.013 |
|                                                                                     | HDD SEAGATE 2.5" 5400rpm 500GB ST9500325AS Wyatt SATA LF F/W:0001SDM1  | KH.50001.011 |
|                                                                                     | HDD TOSHIBA 2.5" 5400rpm 500GB MK5055GSX Libra SATA LF F/W:FG001J      | KH.50004.001 |
|                                                                                     | HDD HGST 2.5" 5400rpm 500GB HTS545050B9A300 Panther B SATA LF F/W:C60F | KH.50007.009 |
|                                                                                     | HDD WD 2.5" 5400rpm 500GB WD5000BEVT-22ZAT0 ML250 SATA LF F/W:01.01A01 | KH.50008.013 |
|                                                                                     | HDD SEAGATE 2.5" 5400rpm 160GB ST9160314AS Wyatt SATA LF F/W:0001SDM1  | KH.16001.042 |
|                                                                                     | HDD SEAGATE 2.5" 5400rpm 320GB ST9320325AS Wyatt SATA LF F/W:0001SDM1  | KH.32001.017 |
|                                                                                     | HDD HGST 2.5" 5400rpm 160GB HTS545016B9A300 Panther B SATA LF F/W:C60F | KH.16007.024 |
|                                                                                     | HDD HGST 2.5" 5400rpm 320GB HTS545032B9A300 Panther B SATA LF F/W:     | KH.32007.007 |
|  | HDD BRACKET                                                            | 33.WB707.002 |
| <b>Keyboard</b>                                                                     |                                                                        |              |
|  | Keyboard GATEWAY GP-4T white SJV40 14 86KS White US International      | KB.I140G.028 |
|                                                                                     | Keyboard GATEWAY GP-4T white SJV40 14 87KS White UK                    | KB.I140G.027 |
|                                                                                     | Keyboard GATEWAY GP-4T white SJV40 14 87KS White German                | KB.I140G.012 |
|                                                                                     | Keyboard GATEWAY GP-4T white SJV40 14 86KS White Arabic                | KB.I140G.004 |
|                                                                                     | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Belgium               | KB.I140G.005 |
|                                                                                     | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Brazilian Portuguese  | KB.I140G.006 |

| Category                                                                          | Description                                                                 | Acer P/N     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------|
|  | Keyboard GATEWAY GP-4T white SJV40 14 87KS White CZ/SK                      | KB.I140G.007 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 86KS White Chinese                    | KB.I140G.008 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Danish                     | KB.I140G.009 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White FR/Arabic                  | KB.I140G.010 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White French                     | KB.I140G.011 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 86KS White Greek                      | KB.I140G.013 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Hungarian                  | KB.I140G.014 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Italian                    | KB.I140G.015 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 91KS White Japanese                   | KB.I140G.016 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Nordic                     | KB.I140G.017 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Norwegian                  | KB.I140G.018 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Portuguese                 | KB.I140G.019 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 86KS White Russian                    | KB.I140G.020 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White SLO/CRO                    | KB.I140G.021 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Spanish                    | KB.I140G.022 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Sweden                     | KB.I140G.023 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Swiss/G                    | KB.I140G.024 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 86KS White Thailand                   | KB.I140G.025 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White Turkish                    | KB.I140G.026 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 86KS White US International w/ Hebrew | KB.I140G.029 |
|                                                                                   | Keyboard GATEWAY GP-4T white SJV40 14 87KS White US w/ Canadian French      | KB.I140G.030 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black US International           | KB.I140G.083 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black UK                         | KB.I140G.082 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black German                     | KB.I140G.067 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Arabic                     | KB.I140G.059 |

| Category                                                                          | Description                                                                 | Acer P/N     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------|
|  | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Belgium                    | KB.I140G.060 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Brazilian Portuguese       | KB.I140G.061 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black CZ/SK                      | KB.I140G.062 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Chinese                    | KB.I140G.063 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Danish                     | KB.I140G.064 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black FR/Arabic                  | KB.I140G.065 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black French                     | KB.I140G.066 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Greek                      | KB.I140G.068 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Hungarian                  | KB.I140G.069 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Italian                    | KB.I140G.070 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Japanese                   | KB.I140G.071 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Nordic                     | KB.I140G.072 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Norwegian                  | KB.I140G.073 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Portuguese                 | KB.I140G.074 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Russian                    | KB.I140G.075 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Spanish                    | KB.I140G.077 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Sweden                     | KB.I140G.078 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Swiss/G                    | KB.I140G.079 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Thailand                   | KB.I140G.080 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black Turkish                    | KB.I140G.081 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black US International w/ Hebrew | KB.I140G.084 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black US w/ Canadian French      | KB.I140G.085 |
|                                                                                   | Keyboard GATEWAY GP-4T Black SJV40 14 86KS Black SLO/CRO                    | KB.I140G.076 |
| <b>LCD</b>                                                                        |                                                                             |              |

| Category                                                                            | Description                                                           | Acer P/N     |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------|
|    | LCD MODULE ASSY 14.0 IN LED LCD GW K/K W/<br>ANTENNA*2 CCD            | 6M.WFB07.001 |
|    | LED LCD AUO 14" WXGA Glare B140XW01 V0 0A LF<br>220nit 8ms 500:1      | LK.14005.006 |
|                                                                                     | LED LCD SAMSUNG 14" WXGA Glare LTN140AT01-<br>G01 LF 220nit 8ms 500:1 | LK.14006.009 |
|                                                                                     | LED LCD LPL 14" WXGA Glare LP140WH1-TLA1 LF<br>220nit 8ms 500:1       | LK.14008.001 |
|                                                                                     | LED LCD CMO 14" WXGA Glare N140B6-L02 LF 220nit<br>8ms 400:1          | LK.1400D.004 |
|                                                                                     | LED LCD AUO 14" WXGA Glare B140XW01 V0 1A LF<br>200nit 8ms 500:1      | LK.14005.008 |
|                                                                                     | LED LCD LPL 14" WXGA Glare LP140WH1-TLA2 LF<br>220nit 8ms 500:1       | LK.14008.004 |
|                                                                                     | POWER BOARD                                                           | 55.WFB07.002 |
|                                                                                     | POWER CABLE                                                           | 50.WB707.003 |
|    | LCD CABLE FOR CCD                                                     | 50.WB707.004 |
|   | LCD BEZEL ASSY WHITE                                                  | 60.WB707.004 |
|  | LCD BRACKET W/HINGE L                                                 | 33.WB707.003 |
|  | LCD BRACKET W/HINGE R                                                 | 33.WB707.004 |
|  | CCD MODULE                                                            | 57.WB707.001 |
| <b>Mainboard</b>                                                                    |                                                                       |              |
|  | MAINBOARD UMA AMD RS690MC W/CARD READER<br>W/O CPU MEMORY             | MB.WFB06.001 |

| Category                                                                            | Description                                                               | Acer P/N     |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------|
| <b>Memory</b>                                                                       |                                                                           |              |
|    | Memory HYNIX SO-DIMM DDRII 667 2GB<br>HMP125S6EFR8C-Y5 LF 128*8 0.055um   | KN.2GB0G.012 |
|                                                                                     | Memory SAMSUNG SO-DIMM DDRII 667 1GB<br>M470T2864QZ3-CE6 LF               | KN.1GB0B.016 |
|                                                                                     | Memory HYNIX SO-DIMM DDRII 667 1GB<br>HYMP112S64CP6-Y5 LF                 | KN.1GB0G.012 |
|                                                                                     | Memory NANYA SO-DIMM DDRII 800 1GB<br>NT1GT64UH8D0FN-AD LF 64*16 0.07um   | KN.1GB03.025 |
|                                                                                     | Memory SAMSUNG SO-DIMM DDRII 800 1GB<br>M470T2864EH3-CF7 LF 64*16 0.055um | KN.1GB0B.033 |
|                                                                                     | Memory HYNIX SO-DIMM DDRII 800 1GB<br>HYMP112S64CP6-S6 LF 64*16 0.065um   | KN.1GB0G.016 |
|                                                                                     | Memory SAMSUNG SO-DIMM DDRII 667 2GB<br>M470T5663QZ3-CE6 LF               | KN.2GB0B.003 |
|                                                                                     | Memory HYNIX SO-DIMM DDRII 800 2GB<br>HYMP125S64CP8-S6 LF 128*8 0.065um   | KN.2GB0G.007 |
|                                                                                     | Memory SAMSUNG SO-DIMM DDRII 800 2GB<br>M470T5663EH3-CF7 LF 128*8 0.055um | KN.2GB0B.018 |
| <b>Heatsink</b>                                                                     |                                                                           |              |
|   | THERMAL MODULE - UMA                                                      | 60.WD507.003 |
| <b>Speaker</b>                                                                      |                                                                           |              |
|  | SPEAKER                                                                   | 23.WB707.001 |
| <b>Miscellaneous</b>                                                                |                                                                           |              |
|                                                                                     | NAMEPLATE - ENNJ31 BLACK                                                  | 40.B9607.001 |
|                                                                                     | NAMEPLATE - NV SERIES BLACK                                               | 40.WCY07.001 |
|                                                                                     | NAMEPLATE - NV SERIES WHITE                                               | 40.WB707.001 |

## Screw List

| Category     | Description                  | Acer P/N     |
|--------------|------------------------------|--------------|
| <b>Screw</b> |                              |              |
|              | SCREW M2.0X3.5-I-NI-NYLOK    | 86.T23V7.005 |
|              | SCREW MM25040IC11            | 86.A08V7.014 |
|              | SCREW MM25060IL69            | 86.A08V7.004 |
|              | SCREW M2.0*3.0-I-NI-NYLOK    | 86.A08V7.005 |
|              | SCREW M2.5*6.0-I(BNI)(NYLOK) | 86.W0907.002 |



# Model Definition and Configuration

## Gateway NV42 Series

| Model   | RO  | Country     | Acer Part No     | Description                                                                       | CPU    |
|---------|-----|-------------|------------------|-----------------------------------------------------------------------------------|--------|
| NV4203  | WW  | WW          | S2.WGJ02.00<br>1 | NV4203 W7HP64WWW1<br>UMACckM 2*1G/160/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEc_ES62        | AATF20 |
| NV4204  | WW  | WW          | S2.WGK0C.00<br>1 | NV4204 LIMPUSWWW1 UMACcwM<br>2*1G/160/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEc_EN11        | AATF20 |
| NV4201c | PA  | China       | LX.WFB0C.00<br>2 | NV4201c LIMPUSWCN1 UMACkkM<br>1*2G/250/6L2.2/5R/<br>CB_bgn_0.3D_GEk_EN91          | AATF20 |
| NV4202i | AAP | Philippines | LX.WFB01.00<br>1 | NV4202i EM W7HB64EMWTPH1<br>UMACkkM 1*2G/320/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEk_ES61 | AAL310 |
| NV4201u | PA  | USA         | LX.WFB02.00<br>1 | NV4201u W7HP64WTUS1<br>UMACkkM 2*2G/320/6L2.2/5R/<br>CB_bgn_0.3D_GEk_ENP1         | AATF20 |
| NV4201i | AAP | Philippines | LX.WFB0C.00<br>3 | NV4201i LIMPUSWTPH1<br>UMACkkM 1*2G/320/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEk_EN11      | AATK42 |
| NV4201v | AAP | Vietnam     | LX.WFB0C.00<br>1 | NV4201v LIMPUSWTVN1<br>UMACkkM 1*2G/250/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEk_EN11      | AATF20 |
| NV4202  | WW  | WW          | S2.WFB0C.00<br>2 | NV4202 LIMPUSWWW1 UMACkkM<br>2*1G/250/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEk_EN11        | AATF20 |
| NV4201  | WW  | WW          | S2.WFB0C.00<br>1 | NV4201 LIMPUSWWW1 UMACkkM<br>2*2G/500_L/BT/6L2.2/5R/<br>CB_bgn_0.3D_GEk_EN11      | AATK42 |

| Model   | CPU    | LCD             | VGA Chip | Memory 1 | Memory 2 |
|---------|--------|-----------------|----------|----------|----------|
| NV4203  | AATF20 | NLED14WXGA<br>G | UMA      | SO1GBII6 | N        |
| NV4204  | AATF20 | NLED14WXGA<br>G | UMA      | SO1GBII6 | N        |
| NV4201c | AATF20 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |
| NV4202i | AAL310 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |
| NV4201u | AATF20 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |
| NV4201i | AATK42 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |
| NV4201v | AATF20 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |
| NV4202  | AATF20 | NLED14WXGA<br>G | UMA      | SO1GBII6 | N        |
| NV4201  | AATK42 | NLED14WXGA<br>G | UMA      | SO2GBII6 | N        |

| Model   | HDD 1(GB)   | ODD    | Extra SW1 | Wireless LAN     | Card Reader     | Bluetooth |
|---------|-------------|--------|-----------|------------------|-----------------|-----------|
| NV4203  | N160GB5.4KS | NSM8XS | NIS       | 3rd WiFi 1x2 BGN | 5 in 1-Build in | N         |
| NV4204  | N160GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | N         |
| NV4201c | N250GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4202i | N320GB5.4KS | NSM8XS | NIS       | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4201u | N320GB5.4KS | NSM8XS | NIS       | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4201i | N320GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4201v | N250GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4202  | N250GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |
| NV4201  | N500GB5.4KS | NSM8XS | N         | 3rd WiFi 1x2 BGN | 5 in 1-Build in | BT 2.0    |



## Test Compatible Components

---

This computer's compatibility is tested and verified by Acer's internal testing department. All of its system functions are tested under Windows® XP Home, Windows® XP Pro environment.

Refer to the following lists for components, adapter cards, and peripherals which have passed these tests. Regarding configuration, combination and test procedures, please refer to the Gateway NV42 series Compatibility Test Report released by the Acer Mobile System Testing Department.

# Windows XP Environment Test

| BRAND              | Type                      | BOM_Name            | Description                                                              |
|--------------------|---------------------------|---------------------|--------------------------------------------------------------------------|
| <b>Adapter</b>     |                           |                     |                                                                          |
| DELTA              | 65W                       | ENNJ31_UMA<br>Ckk2  | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | ENNJ31_UMA<br>Ckk2  | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | ENNJ31_UMA<br>Ckk2  | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| DELTA              | 65W                       | ENNJ31_UMA<br>CkkM  | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | ENNJ31_UMA<br>CkkM  | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | ENNJ31_UMA<br>CkkM  | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| DELTA              | 65W                       | ENNJ31_UMA<br>CkkM2 | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | ENNJ31_UMA<br>CkkM2 | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | ENNJ31_UMA<br>CkkM2 | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| DELTA              | 65W                       | NV42_UMACc<br>kM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | NV42_UMACc<br>kM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | NV42_UMACc<br>kM    | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| DELTA              | 65W                       | NV42_UMACc<br>wM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | NV42_UMACc<br>wM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | NV42_UMACc<br>wM    | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| DELTA              | 65W                       | NV42_UMACK<br>kM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG<br>LED LF for OBL |
| DELTA              | 65W                       | NV42_UMACK<br>kM    | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A,<br>LV5 LED LF     |
| HIPRO              | 65W                       | NV42_UMACK<br>kM    | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B<br>1LF, LV5 LED LF   |
| <b>Audio Codec</b> |                           |                     |                                                                          |
| Conexant           | Conexant CX-<br>20561-15Z | ENNJ31_UMA<br>Ckk2  | Conexant Audio Codec CX-20561-15Z                                        |
| Conexant           | Conexant CX-<br>20561-15Z | ENNJ31_UMA<br>CkkM  | Conexant Audio Codec CX-20561-15Z                                        |
| Conexant           | Conexant CX-<br>20561-15Z | ENNJ31_UMA<br>CkkM2 | Conexant Audio Codec CX-20561-15Z                                        |
| Conexant           | Conexant CX-<br>20561-15Z | NV42_UMACc<br>kM    | Conexant Audio Codec CX-20561-15Z                                        |
| Conexant           | Conexant CX-<br>20561-15Z | NV42_UMACc<br>wM    | Conexant Audio Codec CX-20561-15Z                                        |
| Conexant           | Conexant CX-<br>20561-15Z | NV42_UMACK<br>kM    | Conexant Audio Codec CX-20561-15Z                                        |
| <b>Battery</b>     |                           |                     |                                                                          |

| BRAND            | Type     | BOM Name            | Description                                                                   |
|------------------|----------|---------------------|-------------------------------------------------------------------------------|
| SANYO            | 6CELL2.2 | ENNJ31_UMA<br>Ckk2  | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>Ckk2  | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>Ckk2  | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| SANYO            | 6CELL2.2 | ENNJ31_UMA<br>CkkM  | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>CkkM  | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>CkkM  | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| SANYO            | 6CELL2.2 | ENNJ31_UMA<br>CkkM2 | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>CkkM2 | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | ENNJ31_UMA<br>CkkM2 | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| SANYO            | 6CELL2.2 | NV42_UMACc<br>kM    | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | NV42_UMACc<br>kM    | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | NV42_UMACc<br>kM    | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| SANYO            | 6CELL2.2 | NV42_UMACc<br>wM    | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | NV42_UMACc<br>wM    | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | NV42_UMACc<br>wM    | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| SANYO            | 6CELL2.2 | NV42_UMACK<br>kM    | Battery SANYO AS-2009C Li-Ion 3S2P SANYO 6cell 4400mAh<br>Main COMMON AS09C31 |
| SIMPLO           | 6CELL2.2 | NV42_UMACK<br>kM    | Battery SIMPLO AS-2009C Li-Ion 3S2P PANASONIC 6 cell<br>4400mAh Main COMMON   |
| SIMPLO           | 6CELL2.2 | NV42_UMACK<br>kM    | Battery SIMPLO AS-2009C Li-Ion 3S2P SAMSUNG 6 cell<br>4400mAh Main COMMON     |
| <b>Bluetooth</b> |          |                     |                                                                               |
| Foxconn          | BT 2.1   | ENNJ31_UMA<br>Ckk2  | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| Foxconn          | BT 2.1   | ENNJ31_UMA<br>CkkM  | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| Foxconn          | BT 2.1   | ENNJ31_UMA<br>CkkM2 | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| Foxconn          | BT 2.1   | NV42_UMACc<br>kM    | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| Foxconn          | BT 2.1   | NV42_UMACc<br>wM    | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| Foxconn          | BT 2.1   | NV42_UMACK<br>kM    | Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) f/w:861                         |
| <b>Camera</b>    |          |                     |                                                                               |
| Suyin            | 0.3M DV  | ENNJ31_UMA<br>Ckk2  | Suyin 0.3M DV Camellia_2G                                                     |
| Chicony          | 0.3M DV  | ENNJ31_UMA<br>Ckk2  | Chicony 0.3M DV Calla_2G                                                      |

| BRAND                | Type            | BOM_Name            | Description                                                    |
|----------------------|-----------------|---------------------|----------------------------------------------------------------|
| Suyin                | 0.3M DV         | ENNJ31_UMA<br>CkkM  | Suyin 0.3M DV Camellia_2G                                      |
| Chicony              | 0.3M DV         | ENNJ31_UMA<br>CkkM  | Chicony 0.3M DV Calla_2G                                       |
| Suyin                | 0.3M DV         | ENNJ31_UMA<br>CkkM2 | Suyin 0.3M DV Camellia_2G                                      |
| Chicony              | 0.3M DV         | ENNJ31_UMA<br>CkkM2 | Chicony 0.3M DV Calla_2G                                       |
| Suyin                | 0.3M DV         | NV42_UMACc<br>kM    | Suyin 0.3M DV Camellia_2G                                      |
| Chicony              | 0.3M DV         | NV42_UMACc<br>kM    | Chicony 0.3M DV Calla_2G                                       |
| Suyin                | 0.3M DV         | NV42_UMACc<br>wM    | Suyin 0.3M DV Camellia_2G                                      |
| Chicony              | 0.3M DV         | NV42_UMACc<br>wM    | Chicony 0.3M DV Calla_2G                                       |
| Suyin                | 0.3M DV         | NV42_UMACk<br>kM    | Suyin 0.3M DV Camellia_2G                                      |
| Chicony              | 0.3M DV         | NV42_UMACk<br>kM    | Chicony 0.3M DV Calla_2G                                       |
| <b>Card Reader</b>   |                 |                     |                                                                |
| N/A                  | 5 in 1-Build in | ENNJ31_UMA<br>Ckk2  | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| N/A                  | 5 in 1-Build in | ENNJ31_UMA<br>CkkM  | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| N/A                  | 5 in 1-Build in | ENNJ31_UMA<br>CkkM2 | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| N/A                  | 5 in 1-Build in | NV42_UMACc<br>kM    | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| N/A                  | 5 in 1-Build in | NV42_UMACc<br>wM    | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| N/A                  | 5 in 1-Build in | NV42_UMACk<br>kM    | 5 in 1-Build in MS, MS Pro, SD, SC, XD                         |
| Realtek              | RTS5158E-GR     | ENNJ31_UMA<br>Ckk2  | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| Realtek              | RTS5158E-GR     | ENNJ31_UMA<br>CkkM  | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| Realtek              | RTS5158E-GR     | ENNJ31_UMA<br>CkkM2 | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| Realtek              | RTS5158E-GR     | NV42_UMACc<br>kM    | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| Realtek              | RTS5158E-GR     | NV42_UMACc<br>wM    | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| Realtek              | RTS5158E-GR     | NV42_UMACk<br>kM    | Realtek RTS5158E-GR Card Reader: SD/MMC/MS/MS Duo/xD (USB 2.0) |
| <b>CPU/Processor</b> |                 |                     |                                                                |
| AMD                  | AAL310          | ENNJ31_UMA<br>Ckk2  | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core                      |
| AMD                  | AATF20          | ENNJ31_UMA<br>Ckk2  | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2                   |
| AMD                  | AATK42          | ENNJ31_UMA<br>Ckk2  | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2                       |
| AMD                  | AAL310          | ENNJ31_UMA<br>CkkM  | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core                      |

| BRAND | Type   | BOM_Name            | Description                                  |
|-------|--------|---------------------|----------------------------------------------|
| AMD   | AATF20 | ENNJ31_UMA<br>CkkM  | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2 |
| AMD   | AATK42 | ENNJ31_UMA<br>CkkM  | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2     |
| AMD   | ATL510 | ENNJ31_UMA<br>CkkM  | CPU AMD TurionX2 L510 PGA 1.6G 1M 20W        |
| AMD   | AAL310 | ENNJ31_UMA<br>CkkM2 | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core    |
| AMD   | AATF20 | ENNJ31_UMA<br>CkkM2 | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2 |
| AMD   | AATK42 | ENNJ31_UMA<br>CkkM2 | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2     |
| AMD   | AAL310 | NV42_UMACc<br>kM    | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core    |
| AMD   | AATF20 | NV42_UMACc<br>kM    | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2 |
| AMD   | AATK42 | NV42_UMACc<br>kM    | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2     |
| AMD   | AAL310 | NV42_UMACc<br>wM    | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core    |
| AMD   | AATF20 | NV42_UMACc<br>wM    | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2 |
| AMD   | AATK42 | NV42_UMACc<br>wM    | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2     |
| AMD   | AAL310 | NV42_UMACK<br>kM    | CPU AMD Athlon L310 PGA 1.2G 1M Dual Core    |
| AMD   | AATF20 | NV42_UMACK<br>kM    | CPU AMD Athlon TF20 PGA 1.6G 512K 638 15W G2 |
| AMD   | AATK42 | NV42_UMACK<br>kM    | CPU AMD AthlonX2 TK42 1.6G 1M 638 20W G2     |

| Brand      | Type            | BOM_Name           | Description                                                                      |
|------------|-----------------|--------------------|----------------------------------------------------------------------------------|
| <b>HDD</b> |                 |                    |                                                                                  |
| SEAGATE    | N160GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD SEAGATE 2.5"" 5400rpm 160GB<br>ST9160314AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA    | N160GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD TOSHIBA 2.5"" 5400rpm 160GB<br>MK1655GSX Libra SATA LF F/W: FG011J"         |
| HGST       | N160GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD HGST 2.5"" 5400rpm 160GB<br>HTS545016B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD         | N160GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |
| SEAGATE    | N250GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD SEAGATE 2.5"" 5400rpm 250GB<br>ST9250315AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA    | N250GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD TOSHIBA 2.5"" 5400rpm 250GB<br>MK2555GSX Libra SATA LF F/W:FG001J"          |
| HGST       | N250GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD         | N250GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |

| Brand   | Type            | BOM_Name           | Description                                                                                                          |
|---------|-----------------|--------------------|----------------------------------------------------------------------------------------------------------------------|
| SEAGATE | N320GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD SEAGATE 2.5"" 5400rpm 320GB<br>ST9320325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N320GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD TOSHIBA 2.5"" 5400rpm 320GB<br>MK3255GSX Libra SATA LF F/W:FG011J"                                              |
| HGST    | N320GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD HGST 2.5"" 5400rpm 320GB<br>HTS545032B9A300 Panther B SATA LF F/W:<br>C60F"                                     |
| WD      | N320GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N500GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD SEAGATE 2.5"" 5400rpm 500GB<br>ST9500325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N500GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD TOSHIBA 2.5"" 5400rpm 500GB<br>MK5055GSX Libra SATA LF F/W:FG001J"                                              |
| HGST    | N500GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| WD      | N500GB5.4<br>KS | ENNJ31_UMACKk<br>2 | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-<br>22ZAT0 ML250 SATA LF F/W:01.01A01"                                        |
| SEAGATE | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD SEAGATE 2.5"" 5400rpm 160GB<br>ST9160314AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD TOSHIBA 2.5"" 5400rpm 160GB<br>MK1655GSX Libra SATA LF F/W: FG011J"                                             |
| HGST    | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD HGST 2.5"" 5400rpm 160GB<br>HTS545016B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| WD      | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD SEAGATE 2.5"" 5400rpm 250GB<br>ST9250315AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD TOSHIBA 2.5"" 5400rpm 250GB<br>MK2555GSX Libra SATA LF F/W:FG001J"                                              |
| HGST    | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| HGST    | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F Disk imbalance criteria = 0.014g-cm" |
| WD      | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD SEAGATE 2.5"" 5400rpm 320GB<br>ST9320325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD TOSHIBA 2.5"" 5400rpm 320GB<br>MK3255GSX Libra SATA LF F/W:FG011J"                                              |
| HGST    | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD HGST 2.5"" 5400rpm 320GB<br>HTS545032B9A300 Panther B SATA LF F/W:<br>C60F"                                     |
| HGST    | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD HGST 2.5"" 5400rpm 320GB<br>HTS545032B9A300 Panther B SATA LF F/<br>W:C60F Disk imbalance criteria = 0.014g-cm" |
| WD      | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |

| Brand   | Type            | BOM_Name            | Description                                                                                                          |
|---------|-----------------|---------------------|----------------------------------------------------------------------------------------------------------------------|
| SEAGATE | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M  | "HDD SEAGATE 2.5"" 5400rpm 500GB<br>ST9500325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M  | "HDD TOSHIBA 2.5"" 5400rpm 500GB<br>MK5055GSX Libra SATA LF F/W:FG001J"                                              |
| HGST    | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M  | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| HGST    | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M  | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F Disk imbalance criteria = 0.014g-cm" |
| WD      | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M  | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-<br>22ZAT0 ML250 SATA LF F/W:01.01A01"                                        |
| SEAGATE | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD SEAGATE 2.5"" 5400rpm 160GB<br>ST9160314AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD TOSHIBA 2.5"" 5400rpm 160GB<br>MK1655GSX Libra SATA LF F/W: FG011J"                                             |
| HGST    | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD HGST 2.5"" 5400rpm 160GB<br>HTS545016B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| WD      | N160GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD SEAGATE 2.5"" 5400rpm 250GB<br>ST9250315AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD TOSHIBA 2.5"" 5400rpm 250GB<br>MK2555GSX Libra SATA LF F/W:FG001J"                                              |
| HGST    | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| WD      | N250GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD SEAGATE 2.5"" 5400rpm 320GB<br>ST9320325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD TOSHIBA 2.5"" 5400rpm 320GB<br>MK3255GSX Libra SATA LF F/W:FG011J"                                              |
| HGST    | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD HGST 2.5"" 5400rpm 320GB<br>HTS545032B9A300 Panther B SATA LF F/W:<br>C60F"                                     |
| WD      | N320GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"                                        |
| SEAGATE | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD SEAGATE 2.5"" 5400rpm 500GB<br>ST9500325AS Wyatt SATA LF F/W:0001SDM1"                                          |
| TOSHIBA | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD TOSHIBA 2.5"" 5400rpm 500GB<br>MK5055GSX Libra SATA LF F/W:FG001J"                                              |
| HGST    | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F"                                     |
| WD      | N500GB5.4<br>KS | ENNJ31_UMACKk<br>M2 | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-<br>22ZAT0 ML250 SATA LF F/W:01.01A01"                                        |
| SEAGATE | N160GB5.4<br>KS | NV42_UMACckM        | "HDD SEAGATE 2.5"" 5400rpm 160GB<br>ST9160314AS Wyatt SATA LF F/W:0001SDM1"                                          |

| Brand   | Type            | BOM_Name     | Description                                                                      |
|---------|-----------------|--------------|----------------------------------------------------------------------------------|
| TOSHIBA | N160GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 160GB<br>MK1655GSX Libra SATA LF F/W: FG011J"         |
| HGST    | N160GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 160GB<br>HTS545016B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD      | N160GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |
| SEAGATE | N250GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 250GB<br>ST9250315AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA | N250GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 250GB<br>MK2555GSX Libra SATA LF F/W:FG001J"          |
| HGST    | N250GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD      | N250GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |
| SEAGATE | N320GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 320GB<br>ST9320325AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA | N320GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 320GB<br>MK3255GSX Libra SATA LF F/W:FG011J"          |
| HGST    | N320GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 320GB<br>HTS545032B9A300 Panther B SATA LF F/W:<br>C60F" |
| WD      | N320GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |
| SEAGATE | N500GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 500GB<br>ST9500325AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA | N500GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 500GB<br>MK5055GSX Libra SATA LF F/W:FG001J"          |
| HGST    | N500GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD      | N500GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-<br>22ZAT0 ML250 SATA LF F/W:01.01A01"    |
| SEAGATE | N160GB5.4<br>KS | NV42_UMACcwM | "HDD SEAGATE 2.5"" 5400rpm 160GB<br>ST9160314AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA | N160GB5.4<br>KS | NV42_UMACcwM | "HDD TOSHIBA 2.5"" 5400rpm 160GB<br>MK1655GSX Libra SATA LF F/W: FG011J"         |
| HGST    | N160GB5.4<br>KS | NV42_UMACcwM | "HDD HGST 2.5"" 5400rpm 160GB<br>HTS545016B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD      | N160GB5.4<br>KS | NV42_UMACcwM | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-<br>22ZCT0 ML160 SATA LF F/W:11.01A11"    |
| SEAGATE | N250GB5.4<br>KS | NV42_UMACcwM | "HDD SEAGATE 2.5"" 5400rpm 250GB<br>ST9250315AS Wyatt SATA LF F/W:0001SDM1"      |
| TOSHIBA | N250GB5.4<br>KS | NV42_UMACcwM | "HDD TOSHIBA 2.5"" 5400rpm 250GB<br>MK2555GSX Libra SATA LF F/W:FG001J"          |
| HGST    | N250GB5.4<br>KS | NV42_UMACcwM | "HDD HGST 2.5"" 5400rpm 250GB<br>HTS545025B9A300 Panther B SATA LF F/<br>W:C60F" |

| Brand   | Type            | BOM_Name     | Description                                                                |
|---------|-----------------|--------------|----------------------------------------------------------------------------|
| WD      | N250GB5.4<br>KS | NV42_UMACcwM | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11"  |
| SEAGATE | N320GB5.4<br>KS | NV42_UMACcwM | "HDD SEAGATE 2.5"" 5400rpm 320GB ST9320325AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N320GB5.4<br>KS | NV42_UMACcwM | "HDD TOSHIBA 2.5"" 5400rpm 320GB MK3255GSX Libra SATA LF F/W:FG011J"       |
| HGST    | N320GB5.4<br>KS | NV42_UMACcwM | "HDD HGST 2.5"" 5400rpm 320GB HTS545032B9A300 Panther B SATA LF F/W: C60F" |
| WD      | N320GB5.4<br>KS | NV42_UMACcwM | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11"  |
| SEAGATE | N500GB5.4<br>KS | NV42_UMACcwM | "HDD SEAGATE 2.5"" 5400rpm 500GB ST9500325AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N500GB5.4<br>KS | NV42_UMACcwM | "HDD TOSHIBA 2.5"" 5400rpm 500GB MK5055GSX Libra SATA LF F/W:FG001J"       |
| HGST    | N500GB5.4<br>KS | NV42_UMACcwM | "HDD HGST 2.5"" 5400rpm 500GB HTS545050B9A300 Panther B SATA LF F/W:C60F"  |
| WD      | N500GB5.4<br>KS | NV42_UMACcwM | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-22ZAT0 ML250 SATA LF F/W:01.01A01"  |
| SEAGATE | N160GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 160GB ST9160314AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N160GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 160GB MK1655GSX Libra SATA LF F/W: FG011J"      |
| HGST    | N160GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 160GB HTS545016B9A300 Panther B SATA LF F/W:C60F"  |
| WD      | N160GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 160GB WD1600BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11"  |
| SEAGATE | N250GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 250GB ST9250315AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N250GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 250GB MK2555GSX Libra SATA LF F/W:FG001J"       |
| HGST    | N250GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 250GB HTS545025B9A300 Panther B SATA LF F/W:C60F"  |
| WD      | N250GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 250GB WD2500BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11"  |
| SEAGATE | N320GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 320GB ST9320325AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N320GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 320GB MK3255GSX Libra SATA LF F/W:FG011J"       |
| HGST    | N320GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 320GB HTS545032B9A300 Panther B SATA LF F/W: C60F" |
| WD      | N320GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 320GB WD3200BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11"  |
| SEAGATE | N500GB5.4<br>KS | NV42_UMACckM | "HDD SEAGATE 2.5"" 5400rpm 500GB ST9500325AS Wyatt SATA LF F/W:0001SDM1"   |
| TOSHIBA | N500GB5.4<br>KS | NV42_UMACckM | "HDD TOSHIBA 2.5"" 5400rpm 500GB MK5055GSX Libra SATA LF F/W:FG001J"       |

| Brand | Type            | BOM_Name     | Description                                                                      |
|-------|-----------------|--------------|----------------------------------------------------------------------------------|
| HGST  | N500GB5.4<br>KS | NV42_UMACckM | "HDD HGST 2.5"" 5400rpm 500GB<br>HTS545050B9A300 Panther B SATA LF F/<br>W:C60F" |
| WD    | N500GB5.4<br>KS | NV42_UMACckM | "HDD WD 2.5"" 5400rpm 500GB WD5000BEVT-<br>22ZAT0 ML250 SATA LF F/W:01.01A01"    |

| BRAND           | Type        | BOM_Name            | Description                                                                   |
|-----------------|-------------|---------------------|-------------------------------------------------------------------------------|
| <b>Keyboard</b> |             |                     |                                                                               |
| GATEWAY         | GP-4T Black | ENNJ31_UMACck<br>2  | Keyboard GATEWAY GP-4T Black SJV40<br>Internal 14 Standard Black NONE texture |
| GATEWAY         | GP-4T Black | ENNJ31_UMACck<br>M  | Keyboard GATEWAY GP-4T Black SJV40<br>Internal 14 Standard Black NONE texture |
| GATEWAY         | GP-4T Black | ENNJ31_UMACck<br>M2 | Keyboard GATEWAY GP-4T Black SJV40<br>Internal 14 Standard Black NONE texture |
| GATEWAY         | GP-4T Black | NV42_UMACckM        | Keyboard GATEWAY GP-4T Black SJV40<br>Internal 14 Standard Black NONE texture |
| GATEWAY         | GP-4T white | NV42_UMACcwM        | Keyboard GATEWAY GP-4T white SJV 40<br>Internal 14 Standard White texture     |
| GATEWAY         | GP-4T Black | NV42_UMACckM        | Keyboard GATEWAY GP-4T Black SJV40<br>Internal 14 Standard Black NONE texture |
| <b>LAN</b>      |             |                     |                                                                               |
| Broadcom        | BCM5784     | ENNJ31_UMACck<br>2  | Broadcom BCM5784                                                              |
| Broadcom        | BCM5784     | ENNJ31_UMACck<br>M  | Broadcom BCM5784                                                              |
| Broadcom        | BCM5784     | ENNJ31_UMACck<br>M2 | Broadcom BCM5784                                                              |
| Broadcom        | BCM5784     | NV42_UMACckM        | Broadcom BCM5784                                                              |
| Broadcom        | BCM5784     | NV42_UMACcwM        | Broadcom BCM5784                                                              |
| Broadcom        | BCM5784     | NV42_UMACckM        | Broadcom BCM5784                                                              |
| <b>LCD</b>      |             |                     |                                                                               |
| AUO             | NLED14WXGAG | ENNJ31_UMACck<br>2  | "LED LCD AUO 14"" WXGA Glare<br>B140XW01 V0 1A LF 200nit 8ms 500:1"           |
| SAMSUNG         | NLED14WXGAG | ENNJ31_UMACck<br>2  | "LED LCD SAMSUNG 14"" WXGA Glare<br>LTN140AT01-G01 LF 220nit 8ms 500:1"       |
| LPL             | NLED14WXGAG | ENNJ31_UMACck<br>2  | "LED LCD LPL 14"" WXGA Glare<br>LP140WH1-TLA2 LF 220nit 8ms 500:1"            |
| CMO             | NLED14WXGAG | ENNJ31_UMACck<br>2  | "LED LCD CMO 14"" WXGA Glare<br>N140B6-L02 LF 220nit 8ms 400:1"               |
| CMO             | NLED14WXGAG | ENNJ31_UMACck<br>2  | "LED LCD CMO 14"" WXGA Glare<br>N140B6-L02 C2 LF 220nit 8ms 400:1"            |
| AUO             | NLED14WXGAG | ENNJ31_UMACck<br>M  | "LED LCD AUO 14"" WXGA Glare<br>B140XW01 V0 1A LF 200nit 8ms 500:1"           |
| SAMSUNG         | NLED14WXGAG | ENNJ31_UMACck<br>M  | "LED LCD SAMSUNG 14"" WXGA Glare<br>LTN140AT01-G01 LF 220nit 8ms 500:1"       |
| SAMSUNG         | NLED14WXGAG | ENNJ31_UMACck<br>M  | "LED LCD SAMSUNG 14"" WXGA Glare<br>LTN140AT01-G03 LF 220nit 8ms 500:1"       |

| BRAND         | Type        | BOM_Name        | Description                                                          |
|---------------|-------------|-----------------|----------------------------------------------------------------------|
| LPL           | NLED14WXGAG | ENNJ31_UMACckM  | "LED LCD LPL 14"" WXGA Glare LP140WH1-TLA2 LF 220nit 8ms 500:1"      |
| CMO           | NLED14WXGAG | ENNJ31_UMACckM  | "LED LCD CMO 14"" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1"         |
| CMO           | NLED14WXGAG | ENNJ31_UMACckM  | "LED LCD CMO 14"" WXGA Glare N140B6-L02 C2 LF 220nit 8ms 400:1"      |
| AUO           | NLED14WXGAG | ENNJ31_UMACckM2 | "LED LCD AUO 14"" WXGA Glare B140XW01 V0 1A LF 200nit 8ms 500:1"     |
| SAMSUNG       | NLED14WXGAG | ENNJ31_UMACckM2 | "LED LCD SAMSUNG 14"" WXGA Glare LTN140AT01-G01 LF 220nit 8ms 500:1" |
| LPL           | NLED14WXGAG | ENNJ31_UMACckM2 | "LED LCD LPL 14"" WXGA Glare LP140WH1-TLA2 LF 220nit 8ms 500:1"      |
| CMO           | NLED14WXGAG | ENNJ31_UMACckM2 | "LED LCD CMO 14"" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1"         |
| CMO           | NLED14WXGAG | ENNJ31_UMACckM2 | "LED LCD CMO 14"" WXGA Glare N140B6-L02 C2 LF 220nit 8ms 400:1"      |
| AUO           | NLED14WXGAG | NV42_UMACckM    | "LED LCD AUO 14"" WXGA Glare B140XW01 V0 1A LF 200nit 8ms 500:1"     |
| SAMSUNG       | NLED14WXGAG | NV42_UMACckM    | "LED LCD SAMSUNG 14"" WXGA Glare LTN140AT01-G01 LF 220nit 8ms 500:1" |
| LPL           | NLED14WXGAG | NV42_UMACckM    | "LED LCD LPL 14"" WXGA Glare LP140WH1-TLA2 LF 220nit 8ms 500:1"      |
| CMO           | NLED14WXGAG | NV42_UMACckM    | "LED LCD CMO 14"" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1"         |
| CMO           | NLED14WXGAG | NV42_UMACckM    | "LED LCD CMO 14"" WXGA Glare N140B6-L02 C2 LF 220nit 8ms 400:1"      |
| AUO           | NLED14WXGAG | NV42_UMACcwM    | "LED LCD AUO 14"" WXGA Glare B140XW01 V0 1A LF 200nit 8ms 500:1"     |
| SAMSUNG       | NLED14WXGAG | NV42_UMACcwM    | "LED LCD SAMSUNG 14"" WXGA Glare LTN140AT01-G01 LF 220nit 8ms 500:1" |
| LPL           | NLED14WXGAG | NV42_UMACcwM    | "LED LCD LPL 14"" WXGA Glare LP140WH1-TLA2 LF 220nit 8ms 500:1"      |
| CMO           | NLED14WXGAG | NV42_UMACcwM    | "LED LCD CMO 14"" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1"         |
| CMO           | NLED14WXGAG | NV42_UMACcwM    | "LED LCD CMO 14"" WXGA Glare N140B6-L02 C2 LF 220nit 8ms 400:1"      |
| AUO           | NLED14WXGAG | NV42_UMACckkM   | "LED LCD AUO 14"" WXGA Glare B140XW01 V0 1A LF 200nit 8ms 500:1"     |
| SAMSUNG       | NLED14WXGAG | NV42_UMACckkM   | "LED LCD SAMSUNG 14"" WXGA Glare LTN140AT01-G01 LF 220nit 8ms 500:1" |
| LPL           | NLED14WXGAG | NV42_UMACckkM   | "LED LCD LPL 14"" WXGA Glare LP140WH1-TLA2 LF 220nit 8ms 500:1"      |
| CMO           | NLED14WXGAG | NV42_UMACckkM   | "LED LCD CMO 14"" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1"         |
| CMO           | NLED14WXGAG | NV42_UMACckkM   | "LED LCD CMO 14"" WXGA Glare N140B6-L02 C2 LF 220nit 8ms 400:1"      |
| <b>Memory</b> |             |                 |                                                                      |
| SAMSUNG       | SO1GBII6    | ENNJ31_UMACck2  | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |

| BRAND        | Type                      | BOM_Name        | Description                                                          |
|--------------|---------------------------|-----------------|----------------------------------------------------------------------|
| HYNIX        | SO1GBII6                  | ENNJ31_UMACck2  | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | ENNJ31_UMACck2  | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | ENNJ31_UMACck2  | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| SAMSUNG      | SO1GBII6                  | ENNJ31_UMACckM  | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |
| HYNIX        | SO1GBII6                  | ENNJ31_UMACckM  | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | ENNJ31_UMACckM  | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | ENNJ31_UMACckM  | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| SAMSUNG      | SO1GBII6                  | ENNJ31_UMACckM2 | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |
| HYNIX        | SO1GBII6                  | ENNJ31_UMACckM2 | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | ENNJ31_UMACckM2 | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | ENNJ31_UMACckM2 | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| SAMSUNG      | SO1GBII6                  | NV42_UMACckM    | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |
| HYNIX        | SO1GBII6                  | NV42_UMACckM    | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | NV42_UMACckM    | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | NV42_UMACckM    | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| SAMSUNG      | SO1GBII6                  | NV42_UMACcwM    | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |
| HYNIX        | SO1GBII6                  | NV42_UMACcwM    | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | NV42_UMACcwM    | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | NV42_UMACcwM    | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| SAMSUNG      | SO1GBII6                  | NV42_UMACckkM   | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF             |
| HYNIX        | SO1GBII6                  | NV42_UMACckkM   | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF               |
| SAMSUNG      | SO2GBII6                  | NV42_UMACckkM   | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF             |
| HYNIX        | SO2GBII6                  | NV42_UMACckkM   | Memory HYNIX SO-DIMM DDRII 667 2GB HMP125S6EFR8C-Y5 LF 128*8 0.055um |
| <b>Modem</b> |                           |                 |                                                                      |
| Foxconn      | Fox+Con MC4Z 1.5_3.3V Aus | ENNJ31_UMACckM  | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x                    |

| BRAND             | Type                      | BOM_Name         | Description                                                                                 |
|-------------------|---------------------------|------------------|---------------------------------------------------------------------------------------------|
| Foxconn           | Fox+Con MC4Z 1.5_3.3V Aus | ENNJ31_UMACck M2 | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x                                           |
| Foxconn           | Fox+Con MC4Z 1.5_3.3V Aus | NV42_UMACckM     | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x                                           |
| Foxconn           | Fox+Con MC4Z 1.5_3.3V Aus | NV42_UMACcwM     | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x                                           |
| Foxconn           | Fox+Con MC4Z 1.5_3.3V Aus | NV42_UMACckM     | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x                                           |
| <b>NB Chipset</b> |                           |                  |                                                                                             |
| AMD               | AMDRS780MN                | ENNJ31_UMACck 2  | AMD RS780MN w/ HDCP EEPROM                                                                  |
| AMD               | AMDRS780MN                | ENNJ31_UMACck M  | AMD RS780MN w/ HDCP EEPROM                                                                  |
| AMD               | AMDRS780MN                | ENNJ31_UMACck M2 | AMD RS780MN w/ HDCP EEPROM                                                                  |
| AMD               | AMDRS780MN                | NV42_UMACckM     | AMD RS780MN w/ HDCP EEPROM                                                                  |
| AMD               | AMDRS780MN                | NV42_UMACcwM     | AMD RS780MN w/ HDCP EEPROM                                                                  |
| AMD               | AMDRS780MN                | NV42_UMACckM     | AMD RS780MN w/ HDCP EEPROM                                                                  |
| <b>ODD</b>        |                           |                  |                                                                                             |
| TOSHIBA           | NSM8XS                    | ENNJ31_UMACck 2  | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA                  |
| HLDS              | NSM8XS                    | ENNJ31_UMACck 2  | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA                        |
| SONY              | NSM8XS                    | ENNJ31_UMACck 2  | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA                     |
| PLDS              | NSM8XS                    | ENNJ31_UMACck 2  | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA                      |
| TOSHIBA           | NSM8XS                    | ENNJ31_UMACck M  | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA                  |
| TOSHIBA           | NSM8XS                    | ENNJ31_UMACck M  | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633C LF W/O bezel SATA (HF + Windows 7) |
| HLDS              | NSM8XS                    | ENNJ31_UMACck M  | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA                        |
| HLDS              | NSM8XS                    | ENNJ31_UMACck M  | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT30N LF W/O bezel SATA (HF + Windows 7)       |
| SONY              | NSM8XS                    | ENNJ31_UMACck M  | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA                     |
| SONY              | NSM8XS                    | ENNJ31_UMACck M  | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7585H LF W/O bezel SATA (HF + Windows 7)    |
| PLDS              | NSM8XS                    | ENNJ31_UMACck M  | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA                      |
| PLDS              | NSM8XS                    | ENNJ31_UMACck M  | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A4SH LF W/O bezel SATA (HF + Windows 7)    |

| BRAND             | Type     | BOM_Name        | Description                                                                |
|-------------------|----------|-----------------|----------------------------------------------------------------------------|
| TOSHIBA           | NSM8XS   | ENNJ31_UMACckM2 | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA |
| HLDS              | NSM8XS   | ENNJ31_UMACckM2 | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA       |
| SONY              | NSM8XS   | ENNJ31_UMACckM2 | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA    |
| PLDS              | NSM8XS   | ENNJ31_UMACckM2 | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA     |
| TOSHIBA           | NSM8XS   | NV42_UMACckM    | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA |
| HLDS              | NSM8XS   | NV42_UMACckM    | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA       |
| SONY              | NSM8XS   | NV42_UMACckM    | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA    |
| PLDS              | NSM8XS   | NV42_UMACckM    | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA     |
| TOSHIBA           | NSM8XS   | NV42_UMACcwM    | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA |
| HLDS              | NSM8XS   | NV42_UMACcwM    | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA       |
| SONY              | NSM8XS   | NV42_UMACcwM    | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA    |
| PLDS              | NSM8XS   | NV42_UMACcwM    | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA     |
| TOSHIBA           | NSM8XS   | NV42_UMACckkM   | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633B LF W/O bezel SATA |
| HLDS              | NSM8XS   | NV42_UMACckkM   | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT20N LF W/O bezel SATA       |
| SONY              | NSM8XS   | NV42_UMACckkM   | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7580S LF W/O bezel SATA    |
| PLDS              | NSM8XS   | NV42_UMACckkM   | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A3S LF W/O bezel SATA     |
| <b>SB Chipset</b> |          |                 |                                                                            |
| AMD               | AMDSB710 | ENNJ31_UMACck2  | AMD SB710                                                                  |
| AMD               | AMDSB710 | ENNJ31_UMACckM  | AMD SB710                                                                  |
| AMD               | AMDSB710 | ENNJ31_UMACckM2 | AMD SB710                                                                  |
| AMD               | AMDSB710 | NV42_UMACckM    | AMD SB710                                                                  |
| AMD               | AMDSB710 | NV42_UMACcwM    | AMD SB710                                                                  |
| AMD               | AMDSB710 | NV42_UMACckkM   | AMD SB710                                                                  |
| <b>Software</b>   |          |                 |                                                                            |
|                   | NIS      | ENNJ31_UMACck2  | Antivirus application NIS                                                  |

| BRAND               | Type             | BOM_Name        | Description                                            |
|---------------------|------------------|-----------------|--------------------------------------------------------|
|                     | NIS              | ENNJ31_UMACckM  | Antivirus application NIS                              |
|                     | NIS              | ENNJ31_UMACckM2 | Antivirus application NIS                              |
|                     | NIS              | NV42_UMACckM    | Antivirus application NIS                              |
|                     | NIS              | NV42_UMACcwM    | Antivirus application NIS                              |
|                     | NIS              | NV42_UMACckkM   | Antivirus application NIS                              |
| <b>VGA Chip</b>     |                  |                 |                                                        |
| None                | UMA              | ENNJ31_UMACck2  | UMA (AMD)                                              |
| None                | UMA              | ENNJ31_UMACckM  | UMA (AMD)                                              |
| None                | UMA              | ENNJ31_UMACckM2 | UMA (AMD)                                              |
| None                | UMA              | NV42_UMACckM    | UMA (AMD)                                              |
| None                | UMA              | NV42_UMACcwM    | UMA (AMD)                                              |
| None                | UMA              | NV42_UMACckkM   | UMA (AMD)                                              |
| <b>WiFi Antenna</b> |                  |                 |                                                        |
| WNC                 | PIFA             | ENNJ31_UMACck2  | PIFA                                                   |
| WNC                 | PIFA             | ENNJ31_UMACckM  | PIFA                                                   |
| WNC                 | PIFA             | ENNJ31_UMACckM2 | PIFA                                                   |
| WNC                 | PIFA             | NV42_UMACckM    | PIFA                                                   |
| WNC                 | PIFA             | NV42_UMACcwM    | PIFA                                                   |
| WNC                 | PIFA             | NV42_UMACckkM   | PIFA                                                   |
| <b>Wireless LAN</b> |                  |                 |                                                        |
| Foxconn             | 3rd WiFi 1x2 BGN | ENNJ31_UMACck2  | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon              | 3rd WiFi 1x2 BGN | ENNJ31_UMACck2  | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |
| Foxconn             | 3rd WiFi 1x2 BGN | ENNJ31_UMACckM  | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon              | 3rd WiFi 1x2 BGN | ENNJ31_UMACckM  | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |
| Foxconn             | 3rd WiFi 1x2 BGN | ENNJ31_UMACckM2 | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon              | 3rd WiFi 1x2 BGN | ENNJ31_UMACckM2 | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |
| Foxconn             | 3rd WiFi 1x2 BGN | NV42_UMACckM    | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon              | 3rd WiFi 1x2 BGN | NV42_UMACckM    | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |
| Foxconn             | 3rd WiFi 1x2 BGN | NV42_UMACcwM    | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon              | 3rd WiFi 1x2 BGN | NV42_UMACcwM    | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |

---

| BRAND   | Type             | BOM_Name     | Description                                            |
|---------|------------------|--------------|--------------------------------------------------------|
| Foxconn | 3rd WiFi 1x2 BGN | NV42_UMACkkM | Foxconn Wireless LAN Atheros HB93 1x2 BGN (HM)         |
| Liteon  | 3rd WiFi 1x2 BGN | NV42_UMACkkM | Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH |

## Online Support Information

---

This section describes online technical support services available to help you repair your Acer Systems.

If you are a distributor, dealer, ASP or TPM, please refer your technical queries to your local Acer branch office. Acer Branch Offices and Regional Business Units may access our website. However some information sources will require a user i.d. and password. These can be obtained directly from Acer CSD Taiwan.

Acer's Website offers you convenient and valuable support resources whenever you need them.

In the Technical Information section you can download information on all of Acer's Notebook, Desktop and Server models including:

- Service guides for all models
- User's manuals
- Training materials
- Bios updates
- Software utilities
- Spare parts lists
- TABs (Technical Announcement Bulletin)

For these purposes, we have included an Acrobat File to facilitate the problem-free downloading of our technical material.

Also contained on this website are:

- Detailed information on Acer's International Traveler's Warranty (ITW)
- Returned material authorization procedures
- An overview of all the support services we offer, accompanied by a list of telephone, fax and email contacts for all your technical queries.

We are always looking for ways to optimize and improve our services, so if you have any suggestions or comments, please do not hesitate to communicate these to us.



---

## Numerics

- 3G Antennas
  - Replacing 90

## A

- AFLASH Utility 33
- Antennas
  - Removing 88
  - Replacing 90

## B

- Battery
  - Replacing 128
- Battery Pack
  - Removing 42
- BIOS
  - ROM size 20
  - ROM type 20
  - vendor 20
  - Version 20
- BIOS Utility 25–33
  - Boot 31
  - Exit 32
  - Navigating 25
  - Onboard Device Configuration 29
  - Save and Exit 32
  - Security 28
  - System Security 32
- Bluetooth Module
  - Removing 69
  - Replacing (SSD) 105
- Board Layout
  - Top View 145

## C

- Camera Board
  - Removing 81
  - Replacing 96
- Common Problems 130
- CPU
  - Removing 77

## D

- DIMM Module
  - Replacing 125

- DIMM Modules
  - Removing 46
- Display 4

## E

- External Module Disassembly
  - Flowchart 41

## F

- Features 1
- Flash Utility 33
- FPC Cable
  - Removing 84
- FRU (Field Replaceable Unit) List 149

## H

- HDD Module
  - Removing 49
  - Replacing 121
- Hot Keys 13

## I

- Indicators 11
- Intermittent Problems 140
- Internal Microphone Failure 136
- Internal Speaker Failure 135

## J

- Jumper and Connector Locations 145
  - Top View 145

## K

- Keyboard
  - Removing 54
  - Replacing 118
- Keyboard Failure 134

## L

- LCD Bezel
  - Removing 79
  - Replacing 97
- LCD Brackets
  - Removing 84

---

- Replacing 93
- LCD Cable
  - Replacing 93
- LCD Failure 133
- LCD Module
  - Reassembly 90
  - Removing 56
  - Replacing 114
- LCD Module Disassembly
  - Flowchart 78
- LCD Panel
  - Removing 82
  - Replacing 95
- LED Board
  - Replacing (SSD) 111
- Lower Cover
  - Replacing 128
- Lower Covers
  - Removing 43

## M

- Main Unit
  - Reassembly 99
- Main Unit Disassembly
  - Flowchart 51
- Mainboard
  - Removing 73
  - Replacing 102
- Memory Check 130
- Microphone Board
  - Replacing 91
- Microphone Module
  - Removing 87
- Model Definition 164
- Modem Board
  - Removing 67
  - Replacing 106

## N

- No Display Issue 131

## O

- ODD Failure 138
- ODD Module
  - Removing 44
- Online Support Information 193

## P

- Panel 5
  - Bottom 8
  - left 5
- PC Card 11
- POST Codes
  - Reference Tables 141
- Power Board
  - Removing 86, 92
- Power Button Failure 138
- Power On Failure 130

## R

- RTC Battery
  - Removing 75
  - Replacing 101

## S

- Speaker Module
  - Replacing (SSD) 108
- Speaker Modules
  - Removing 63
- SSD SKU Reassembly Procedure 99
- Switch Cover
  - Removing 52
  - Replacing 119
- System
  - Block Diagram 4

## T

- Test Compatible Components 167
- Thermal Module
  - Removing 76
  - Replacing 100
- Top 145
- Touch Pad Failure 134
- TouchPad FFC
  - Removing 66
  - Replacing 107
- Troubleshooting
  - Built-in KB Failure 134
  - Internal Microphone 136
  - Internal Speakers 135
  - LCD Failure 133
  - No Display 131
  - ODD 138

---

- Other Failures 139
- Power Button 138
- Power On 130
- Touch Pad 134
- USB 138
- WLAN 139

## U

- Undetermined Problems 140
- Upper Cover
  - Removing 60
- Upper Cover Reassembly Process 114
- USB Board
  - Removing 71
  - Replacing 103
- USB Failure (Rightside) 138
- utility
  - BIOS 25–33

## W

- Windows 2000 Environment Test 168
- Wireless Function Failure 139
- WLAN Antennas
  - Replacing 90
- WLAN Module
  - Removing 47
  - Replacing 123

